


# Ultra Fast Recovery Rectifiers

## UFT50

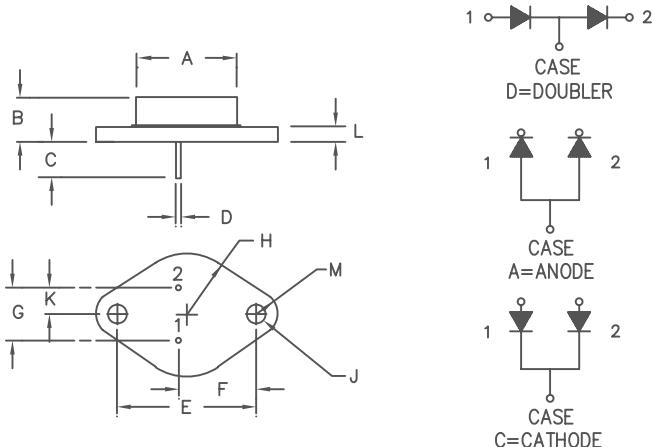

| Dim. | Inches  |         | Millimeter |         |       |
|------|---------|---------|------------|---------|-------|
|      | Minimum | Maximum | Minimum    | Maximum | Notes |
| A    | —       | .875    | —          | 22.23   | Dia.  |
| B    | .250    | .450    | 6.35       | 11.43   |       |
| C    | .312    | —       | 7.92       | —       |       |
| D    | .038    | .043    | .97        | 1.09    | Dia.  |
| E    | 1.177   | 1.197   | 29.90      | 30.40   |       |
| F    | .655    | .675    | 16.64      | 17.15   |       |
| G    | .420    | .440    | 10.67      | 11.18   |       |
| H    | —       | .525    | —          | 13.34   | Rad.  |
| J    | .151    | .161    | 3.84       | 4.09    | Dia.  |
| K    | .205    | .225    | 5.21       | 5.72    |       |
| L    | —       | .135    | —          | 3.43    |       |
| M    | —       | .188    | —          | 4.78    | Rad.  |

TO-204AA (TO-3)

| Microsemi Catalog Number | Working Reverse Voltage | Peak Reverse Voltage |
|--------------------------|-------------------------|----------------------|
| UFT5010*                 | 100V                    | 100V                 |
| UFT5015*                 | 150V                    | 150V                 |
| UFT5020*                 | 200V                    | 200V                 |

\* ADD D, C OR A

- Ultra Fast Recovery Rectifier
- 175°C Junction Temperature
- $V_{RRM}$  100 to 200V
- High Reliability
- 50 Amps current rating
- $t_{RR}$  35 nsec maximum

### Electrical Characteristics Per Leg

#### UFT50

|                              |                           |   |
|------------------------------|---------------------------|---|
| Average forward current      | $I_F(AV)$ 50A             | Square wave   |
| Case Temperature (Standard)  | $T_C$ 131°C               | $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$                  |
| Case Temperature (Reverse)   | $T_C$ 102°C               | $R_{\theta JC} = 1.5^\circ\text{C}/\text{W}$                  |
| Maximum surge current        | $I_{FSM}$ 500A            | 8.3 ms, half sine, $T_J = 175^\circ\text{C}$                  |
| Max peak forward voltage     | $V_{FM}$ 1.0V             | $I_{FM} = 25\text{A}; T_J = 25^\circ\text{C}^*$               |
| Max reverse recovery time    | $t_{RR}$ 35 ns            | $1/2\text{A}, 1\text{A}, 1/4\text{A}, T_J = 25^\circ\text{C}$ |
| Max peak reverse current     | $I_{RM}$ 1.0 mA           | $V_{RRM}, T_J = 125^\circ\text{C}$                            |
| Max peak reverse current     | $I_{RM}$ 15 $\mu\text{A}$ | $V_{RRM}, T_J = 25^\circ\text{C}$                             |
| Typical Junction Capacitance | $C_J$ 225 pF              | $V_R = 10\text{V}, f = 1\text{Mhz}, T_J = 25^\circ\text{C}$   |

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

### Thermal and Mechanical Characteristics

|  |                 |                               |
|--|-----------------|-------------------------------|
| Storage temp range                         | $T_{STG}$       | -65°C to 200°C                |
| Operating junction temp range              | $T_J$           | -65°C to 175°C                |
| Max thermal resistance (standard polarity) | $R_{\theta JC}$ | 1.0°C/W Junction to Case      |
| Max thermal resistance (reverse polarity)  | $R_{\theta JC}$ | 1.5°C/W Junction to Case      |
| Typical thermal resistance (Greased)       | $R_{\theta CS}$ | 0.4°C/W Case to sink          |
| Weight                                     |                 | 1.0 ounces (28 grams) typical |

**LAWRENCE**  
**Microsemi**

6 Lake Street  
Lawrence, MA 01841  
PH: (978) 620-2600  
FAX: (978) 689-0803  
www.microsemi.com

05-08-07 Rev. 2

# UFT50

Figure 1  
Typical Forward Characteristics – Per Leg

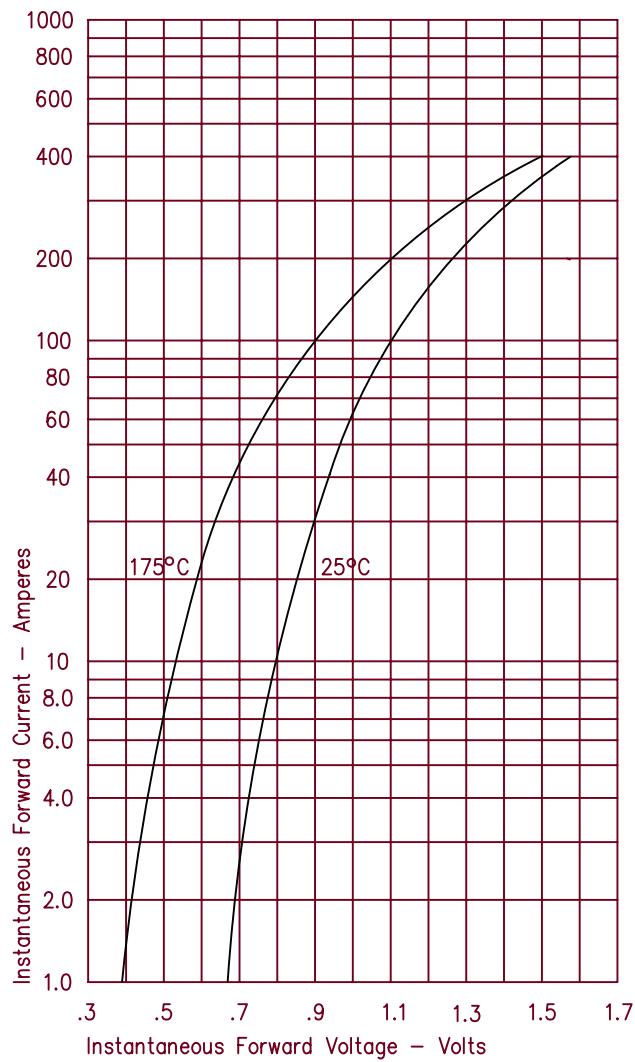


Figure 2  
Typical Reverse Characteristics – Per Leg

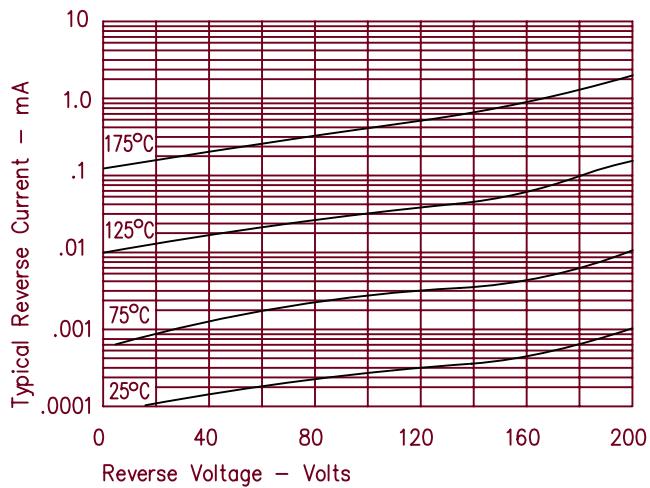


Figure 3  
Typical Junction Capacitance – Per Leg

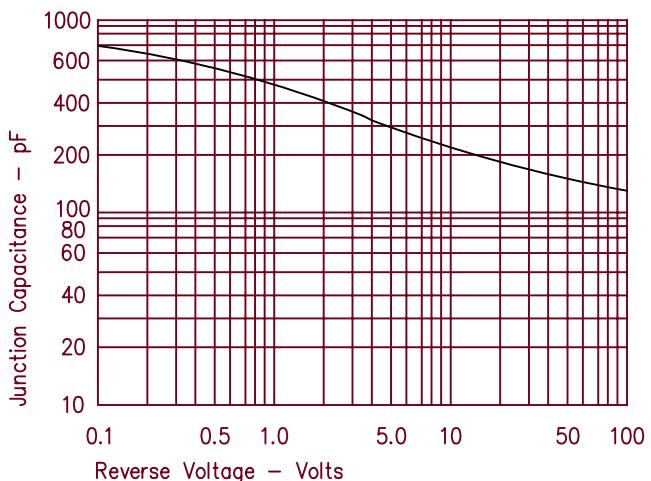


Figure 4  
Forward Current Derating – Per Leg Standard Polarity

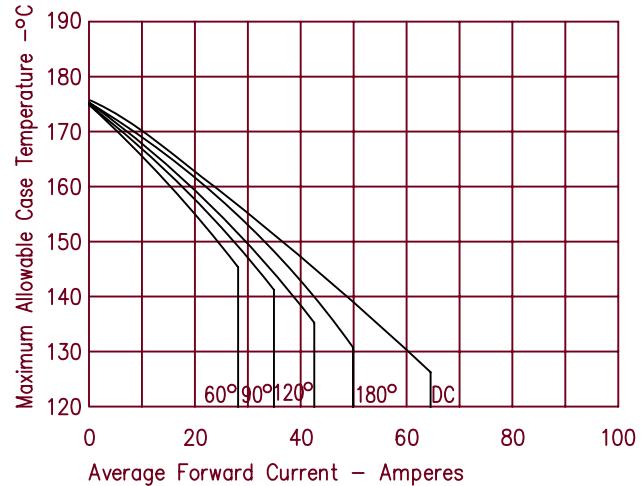


Figure 5  
Max Forward Power Dissipation – Per Leg Standard Polarity

