



0660



0660-0-15-XX-30-XX-10-0

Solder mount in 1,3 min.
mounting hole


0677



0677-0-15-XX-30-XX-10-0

Solder mount in 1,3 min.
mounting hole


0555



0555-0-15-XX-20-XX-10-0

Solder mount in 1,35 min.
mounting hole


0558

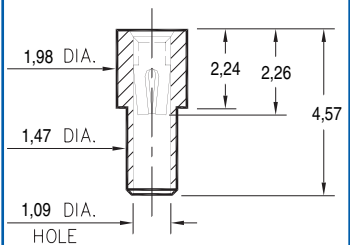

0558-0-15-XX-30-XX-10-0

Solder mount in 1,55 min.
mounting hole

0675/0679




067X-0-15-XX-30-XX-10-0

Solder mount in 1,37 min.
mounting hole

Basic Part Number	Length L
0675-0	3,68
0679-0	5,16

1065/1066/7065




X06X-0-15-XX-30-XX-10-0

Solder mount in 1,4 min.
mounting hole

Basic Part Number	Length L
1065-0	4,83
1066-0	4,06
7065-0	4,6


0682



0682-0-15-XX-32-XX-10-0

Solder mount in 1,42 min.
mounting hole


0667



0667-0-15-XX-30-XX-10-0

Solder mount in 1,45 min.
mounting hole


0665



0665-0-15-XX-30-XX-10-0

Solder mount in 1,55 min.
mounting hole

4286

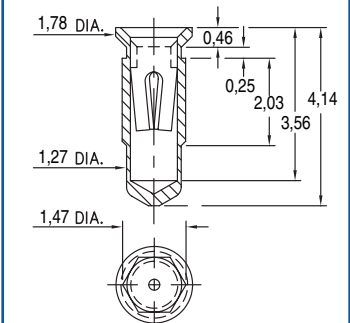

4286-0-15-XX-30-XX-10-0

Hex press-fit in 1,4
plated thru hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: ± 0,13
DIAMETERS: ± 0,05
ANGLES: ± 2°

ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0

BASIC PART #

SPECIFY SHELL FINISH:

01 5,08µm TIN/LEAD OVER NICKEL

80 5,08µm TIN OVER NICKEL

15 0,25µm GOLD OVER NICKEL

SPECIFY CONTACT FINISH:

02 2,54µm TIN/LEAD OVER NICKEL

84 2,54µm TIN OVER NICKEL

27 0,76µm GOLD OVER NICKEL

SELECT CONTACT

#30 or #32 CONTACT (DATA ON PAGE 208)

