




**0660**

**0660-0-15-XX-30-XX-10-0**

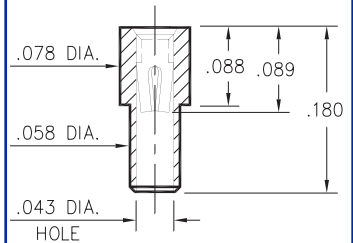
Solder mount in .051 min. mounting hole

**0677**

**0677-0-15-XX-30-XX-10-0**


Solder mount in .051 min. mounting hole

**0555**

**0555-0-15-XX-20-XX-10-0**

Solder mount in .053 min. mounting hole


**0558**

**0558-0-15-XX-30-XX-10-0**

Solder mount in .061 min. mounting hole

**0675/0679**

**067X-0-15-XX-30-XX-10-0**


Solder mount in .054 min. mounting hole

| Basic Part Number | Length L |
|-------------------|----------|
| 0675-0            | .145     |
| 0679-0            | .203     |


**1065/1066/7065**

**X06X-0-15-XX-30-XX-10-0**

Solder mount in .055 min. mounting hole


| Basic Part Number | Length L |
|-------------------|----------|
| 1065-0            | .190     |
| 1066-0            | .160     |
| 7065-0            | .181     |

**0682**

**0682-0-15-XX-32-XX-10-0**

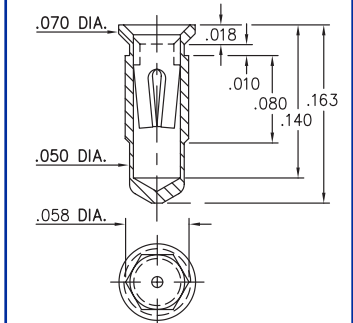
Solder mount in .056 min. mounting hole

**0667**

**0667-0-15-XX-30-XX-10-0**

Solder mount in .057 min. mounting hole

**0665**

**0665-0-15-XX-30-XX-10-0**

Solder mount in .061 min. mounting hole

**4286**

**4286-0-15-XX-30-XX-10-0**

Hex press-fit in .055 plated thru hole

## SPECIFICATIONS

**SHELL MATERIAL:**  
Brass Alloy 360, 1/2 Hard

**CONTACT MATERIAL:**  
Beryllium Copper Alloy 172, HT

**DIMENSION IN INCHES**  
**TOLERANCES ON:**  
LENGTHS:  $\pm .005$   
DIAMETERS:  $\pm .002$   
ANGLES:  $\pm .002^\circ$

**ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0**

**BASIC PART #**   
**SPECIFY SHELL FINISH:**   
**01** 200 $\mu$ " TIN/LEAD OVER NICKEL  
**15** 10 $\mu$ " GOLD OVER NICKEL

**SPECIFY CONTACT FINISH:**  
**02** 200 $\mu$ " TIN/LEAD OVER NICKEL  
**14** 10 $\mu$ " GOLD OVER NICKEL  
**27** 30 $\mu$ " GOLD OVER NICKEL

**SELECT CONTACT**

#30 or #32 CONTACT (DATA ON PAGE 208 )