



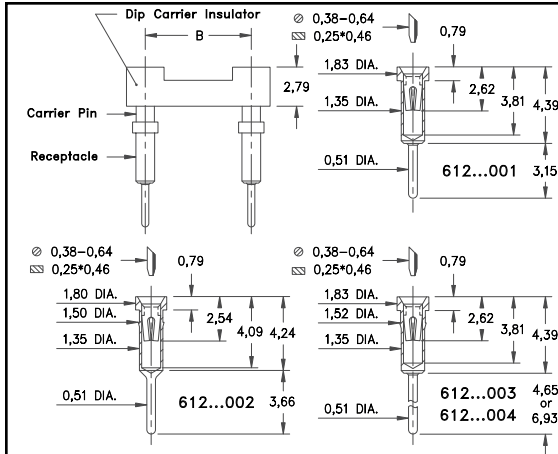

- Convenient way to load loose receptacles on a PC board.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 612 use MM #0132, #0135, #0255 or #8855 pins. See pages 136 and 142 for details.
- Insulators are high temperature thermoplastic.

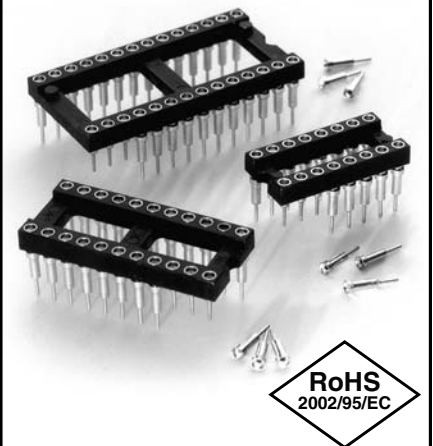

Total number of pins				Quantity per tube	For Electrical, Mechanical & Environmental Data, See pg. 4 Ordering Information XX=Plating Code See Below			
	A	B	C		Tail Length = 3,15 (0,56 Min. Mounting Hole)	Tail Length = 3,66 (0,56 Min. Mounting Hole)	Tail Length = 4,65 (0,56 Min. Mounting Hole)	Tail Length = 6,93 (0,56 Min. Mounting Hole)
10	12,6	5,08	7,6	40	612-XX-210-41-001000	612-XX-210-41-002000	612-XX-210-41-003000	612-XX-210-41-004000
4	5,0	7,62	10,1	102	612-XX-304-41-001000	612-XX-304-41-002000	612-XX-304-41-003000	612-XX-304-41-004000
6	7,6	7,62	10,1	68	612-XX-306-41-001000	612-XX-306-41-002000	612-XX-306-41-003000	612-XX-306-41-004000
8	10,1	7,62	10,1	50	612-XX-308-41-001000	612-XX-308-41-002000	612-XX-308-41-003000	612-XX-308-41-004000
10	12,6	7,62	10,1	40	612-XX-310-41-001000	612-XX-310-41-002000	612-XX-310-41-003000	612-XX-310-41-004000
14	17,7	7,62	10,1	28	612-XX-314-41-001000	612-XX-314-41-002000	612-XX-314-41-003000	612-XX-314-41-004000
16	20,3	7,62	10,1	25	612-XX-316-41-001000	612-XX-316-41-002000	612-XX-316-41-003000	612-XX-316-41-004000
18	22,8	7,62	10,1	22	612-XX-318-41-001000	612-XX-318-41-002000	612-XX-318-41-003000	612-XX-318-41-004000
20	25,3	7,62	10,1	20	612-XX-320-41-001000	612-XX-320-41-002000	612-XX-320-41-003000	612-XX-320-41-004000
22	27,8	7,62	10,1	18	612-XX-322-41-001000	612-XX-322-41-002000	612-XX-322-41-003000	612-XX-322-41-004000
24	30,4	7,62	10,1	16	612-XX-324-41-001000	612-XX-324-41-002000	612-XX-324-41-003000	612-XX-324-41-004000
28	35,5	7,62	10,1	14	612-XX-328-41-001000	612-XX-328-41-002000	612-XX-328-41-003000	612-XX-328-41-004000
20	25,4	10,16	12,7	20	612-XX-420-41-001000	612-XX-420-41-002000	612-XX-420-41-003000	612-XX-420-41-004000
22	27,8	10,16	12,7	18	612-XX-422-41-001000	612-XX-422-41-002000	612-XX-422-41-003000	612-XX-422-41-004000
24	30,4	10,16	12,7	16	612-XX-424-41-001000	612-XX-424-41-002000	612-XX-424-41-003000	612-XX-424-41-004000
28	35,5	10,16	12,7	14	612-XX-428-41-001000	612-XX-428-41-002000	612-XX-428-41-003000	612-XX-428-41-004000
32	40,6	10,16	12,7	12	612-XX-432-41-001000	612-XX-432-41-002000	612-XX-432-41-003000	612-XX-432-41-004000
24	30,4	15,24	17,7	16	612-XX-624-41-001000	612-XX-624-41-002000	612-XX-624-41-003000	612-XX-624-41-004000
28	35,5	15,24	17,7	14	612-XX-628-41-001000	612-XX-628-41-002000	612-XX-628-41-003000	612-XX-628-41-004000
32	40,6	15,24	17,7	12	612-XX-632-41-001000	612-XX-632-41-002000	612-XX-632-41-003000	612-XX-632-41-004000
36	45,7	15,24	17,7	11	612-XX-636-41-001000	612-XX-636-41-002000	612-XX-636-41-003000	612-XX-636-41-004000
40	50,8	15,24	17,7	10	612-XX-640-41-001000	612-XX-640-41-002000	612-XX-640-41-003000	612-XX-640-41-004000
42	53,3	15,24	17,7	9	612-XX-642-41-001000	612-XX-642-41-002000	612-XX-642-41-003000	612-XX-642-41-004000
48	60,9	15,24	17,7	8	612-XX-648-41-001000	612-XX-648-41-002000	612-XX-648-41-003000	612-XX-648-41-004000
50	63,5	15,24	17,7	8	612-XX-650-41-001000	612-XX-650-41-002000	612-XX-650-41-003000	612-XX-650-41-004000
52	66,0	15,24	17,7	7	612-XX-652-41-001000	612-XX-652-41-002000	612-XX-652-41-003000	612-XX-652-41-004000
50	63,5	22,86	25,3	8	612-XX-950-41-001000	612-XX-950-41-002000	612-XX-950-41-003000	612-XX-950-41-004000
52	66,0	22,86	25,3	7	612-XX-952-41-001000	612-XX-952-41-002000	612-XX-952-41-003000	612-XX-952-41-004000
64	81,2	22,86	25,3	6	612-XX-964-41-001000	612-XX-964-41-002000	612-XX-964-41-003000	612-XX-964-41-004000
SPECIFY PLATING CODE XX=					93	43◇		
Sleeve (Pin)					5,08µm Sn/Pb	5,08µm Sn	For RoHS compliance select ◇ plating code.	
Contact (Clip)					0,76µm Au	0,76µm Au		