
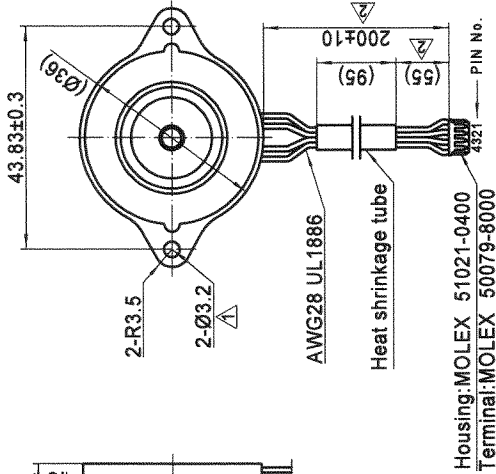


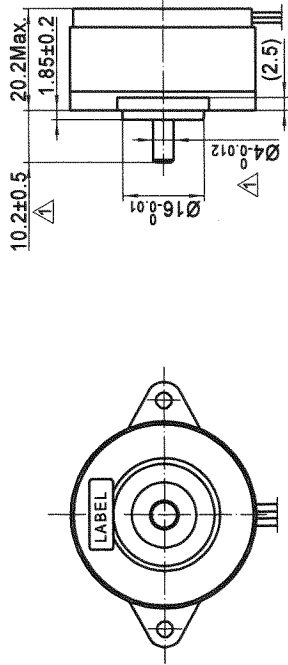

接线图

Wiring Diagram

51021-0400 PIN No.	颜色 Colour
1	黑 BLK
2	橙 ORG
3	红 RED
4	蓝 BLU

连接器针位 vs. 引线颜色

Pin No. vs. Lead Wire Colour

励磁顺序 vs. 旋转方向

Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

从安装面看为顺时针方向

Clockwise view from mounting side

规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	0.9°
3. 额定电压 Rated Voltage	4.26V DC
4. 额定电流 Rated Current	0.6Amp
5. 保持力矩 Holding Torque	120mNm Typ. (Two phase on/rated current)
6. 相电阻 Phase Resistance	7.1ohm±10%(20°C)
7. 相电感 Phase Inductance	5.4mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	11gcm ²
9. 电机重量 Motor Weight	110g
10. 绝缘等级 Insulation Class	B(130°C)

铭牌 LABEL (4:1)



Work Order 加工单号
Date Format 日期格式



MOONS'		Hybrid Stepping Motor	
		Shanghai Moons' Electric Co., Ltd.	
		This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.	
REV.	版本记录	REVISION RECORD	SCALE 1:1
C	190±10, (50) Δ	2019.05.10	5.10
B	15±0.5; Ø5.2-M3 Δ	2019.03.19	5.10
A	原始版本	2019.03.14	2019.05.10
DATE	DATE	SIGNATURE	Rev.C
1	2	5	7
1	2	5	8