


S Series Intelligent LED Driver

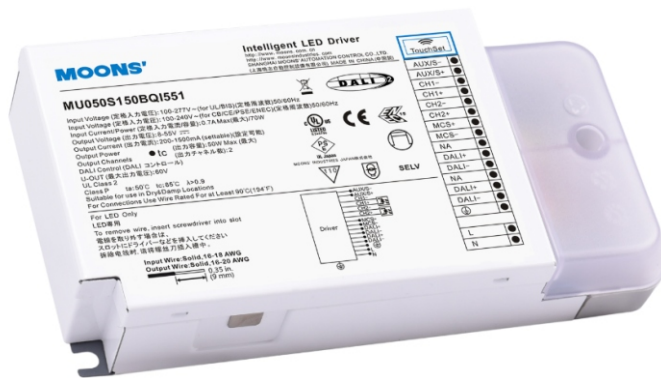

0.1% Deep Dimming
Tunable White
Human Centric Lighting

Flicker Free

Meet:

CEC title 24 JA8 & JA10

IEEE PAR 1789-2015

■ 50W S Series-Dual Channels LED Driver- MU050S150BQI551

MOONS' 50W S Series Dual Channels LED Drivers are designed for Human Centric Lighting and Tunable White application, mixed two channels achieve smoothest color temperature tuning and brightness dimming due to 0.1% deep dimming character, which let human feel like sunlight and moonlight. Fit with various application thanks to driver's various function, such as programmable parameters, different outline, optional dimming strategy, etc.

■ Main Characteristics

- Dual Channels, constant current driver
- Programmable operation window
- 0.1% Dimming & 65536 Dimming Steps
- Standby power<0.5W
- Integrated 12Vdc/100mA auxiliary power supply
- 4 in 1: DT8 Tunable White(1500-6500K), DT6 Tunable White(1500-6500K), solo dimming, dual dimming
- 50W Max each channel with total 50W load
- Flicker free for whole operation range

■ Benefits

- Application-oriented operating window for maximum compatibility
- Independent two channels for Tunable White application
- Ready for Zhaga book 18/low voltage power
- Common anode design for higher output current

■ Applications

- Office, Architecture, Education, Healthcare, Smart home

Compliance and Certification

- DALI-2 Certificated
- Comply with IEC62386-101(2.0), 102(2.0), 207(2.0), 209
- Comply with UL Class2
- UL, CE, ENEC, EAC, PSE safety approval

Electrical Specifications

Input	Efficiency (230Vac)	87% (Typical)
	Efficiency (100Vac)	86.5% (Typical)
	Voltage Range (Vac)	90~305
	Rated Input Voltage (Vac)	100~277
	Frequency Range (Hz)	50/60
	Power Factor	>0.9 @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	THD	<20% @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	AC Current (Typical)	0.7A Max @ 100Vac, 0.3A Max @ 230Vac
	Inrush Current (Typical)	<10A @ 100~277Vac input, 25°C cold start and 100% load conditions
	Input Power (W)	66 (Max)
	Standby Power (W)	<0.5W @ 100V/60Hz, 230V/50Hz, 277V/60Hz
	Leakage Current (Max)	0.75mA Max @ 277Vac 60Hz input
Output	Output Voltage Range (V)	8~55
	Output Current Range (mA)	200~1500
	Rated Power (W)	50 (Max)
	Output Channel Number	2 or 1
	Ripple Current (PK-PK)/AV	20% Max @ output 300~1500mA conditions
	Current Tolerance	±5% @ setting current 200~1500mA
	Line Regulation	±1%
	Load Regulation	±3%
	Startup Time	540mS≤T≤660mS @ 100V/230V/277V input voltage, comply with IEC62386-102(2.0)
Auxiliary Output	Output Voltage	12Vdc (±5%) @ operation range
	Operation Range	0~100mA
Dimming Port	DALI Bus Power Supply	NA
	DALI Dimming	DALI dimming 0.1% ~ 100%, optional dimming curve: logarithmic/linear
Protection	Open Circuit Protection (V)	58.5
	Short Circuit	Automatic recovery
	Over Temperature	Automatic recovery
Environment	Operating Temperature	-25~50°C
	Operating Humidity	20~95%RH, non-condensing
	Storage Temperature	-40~85°C
	Storage Humidity	10~95%RH
	Vibration	10/500Hz, 5G 12min/cycle, period for 72min each along X、Y、X axis
	Ingress Protection Rating	IP20
Safety & EMC	Safety Standard	UL8750, UL1310 Class 2, CAN/CSA-C22.2NO.107.1-01, EN61347-1, EN61347-2-13
	EMC Emission	FCC Part 15 ClassB, EN55015, EN61000-3-2 ClassC, EN61000-3-3
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge L, N-FG: 2.5KV, L-N: 2.5KV)
Others	Lifetime	>50000 hours @ Tc=70°C and 100% load conditions
	MTBF	500,000 hours, measured at full load, 25°C ambient temperature SR-332 Issue 3
	Dimension (L x W x H mm)	152.38 x 76 x 30
	Weight	400g

Connector Layout



AUX±

i. The AUX circuit is isolated from primary (input) circuit and dimming circuit, but not isolated from secondary (output) circuit.

DALI±

- i. The dimming circuit is isolated from primary (input) circuit and secondary (output) circuit .
- ii. DT8 Tunable White: Comply with IEC62386-209, use one DALI address to achieve color temperature changing and intensity changing. CH1±: Cold LEDs, CH2±: Warm LEDs. DT6 Tunable White: Based on DT6, two channels two DALI addresses, address X+1 is responsible for controlling two channels' output to mix different color temperature, address X is responsible for total intensity control. CH1±: Cold LEDs, CH2±: Warm LEDs. Solo Dimming: Dim two channels through 1 address simultaneously. Dual Dimming: Dim two channels through 2 addresses respectively.
- iii. Update firmware through DALI interface
- iv. Maximum communication cable length

Table with 6 columns: Material, Area mm², AWG, and Maximum cable length (meter) at 25°C, 50°C, and 75°C. Rows show data for Copper with area values 0.5, 0.75, 1, and 1.5 mm².

iv. Standby power <0.5W only if set dim level 0 and disable AUX.

MCS±

- i. MCS+/- interface voltage 5V
 - ii. Could connect to external NTC
- NTC thermal management protects LED lamp, when the temperature of LED lamp over temperature protection point, the current will be reduced by 50% every 5 minutes. Default setting is 85°C.




NTC compatibility list:

Table with 2 columns: NTC Manufacturer and NTC Model NO. Rows list MURATA (NCP21WB473J03RA), VISHAY (NTCS0805e4473JXT), and VISHAY (NTCLE100E3473).

- iii. The MCS terminal is to be used for factory programming and update of firmware program. Not for connecting to a control device to perform control function (except NTC thermistor).

CH1±, CH2±

- i. General connection
- ii. Get larger output current through parallel connection
- iii. Support common anode connection

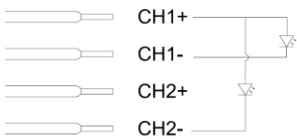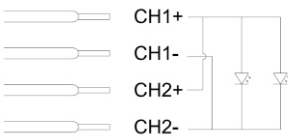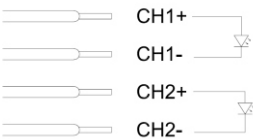

ii. Maximum LED wiring length (copper)

Table with 6 columns: Wire Value, AWG 20 (0.52 mm²), AWG 19 (0.57 mm²), AWG 18 (0.81 mm²), AWG 17 (1.03 mm²), and AWG 16 (1.32 mm²). Rows show Distance (m) for 16, 18, 25, 32, and 41 meters.

! Please observe voltage drop over cable lengths.
! Longer cable lengths increase EMI.


Dimming Performance

Flicker Free

- i. Meet: CEC title 24 JA8 & JA10, IEEE PAR 1789-2015
- ii. The product utilize driver and LED load 1 and 2 is compliant with CEC title 24 JA8 and IEEE PAR 1789-2015 Recommended Practice 1 in the dimming range from 5mA to 150mA.

Dimming Method

In the range of 200~1500mA, the current operates in continuous mode;
In the range of 0~200mA, the current operates in PWM dimming mode, and the PWM frequency 3.6KHZ.

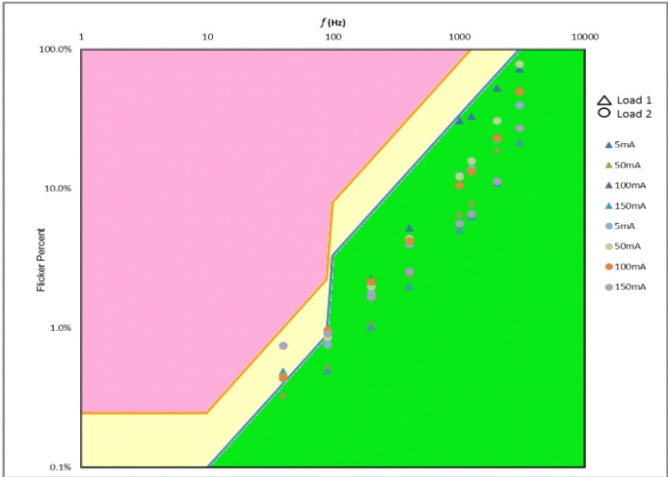

Porgrammable Performance

Touch Setting

Program driver's parameters without cable.

Download Software

Smartkey Network

Program driver's parameters through cable programming. Update driver's firmware.

Download Software

1mA Current Programmable Step

Default Factory Setting

Touch Setting V1.1.1.12

Load Save Read Write Setting

Current

Channel 1 350 mA

Channel 2 350 mA

General Setting

Dimming Strategy DT 8 Tunable White Driver

Dimming Curve Logarithmic

Minimum Dimming Level 0.1 %

NTC 85

AUX Power Enable

Physical CCT Warmest 2700 K Coolest 6500 K


Logical CCT Warmest 2700 K Coolest 6500 K

! GTIN-13 Code: 6971481490021

Inrush Current

Ipeak & Time

Input Voltage	Inrush Current Ipeak	Inrush Current Time, measured 50% of Ipeak
100VAC	3.5A	35us
220VAC	8A	35us
277VAC	9A	40us

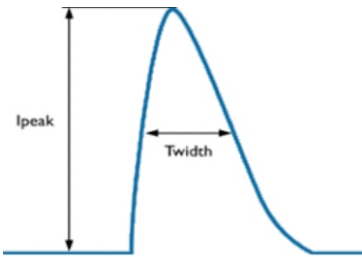


Automaitc Circuit Breakers


ACB Type	B10	B13	B16	B20	C10	C13	C16	C20
Number of LED Drivers @rated load	15	19	24	30	20	26	32	40

■ **Curve**


■ **Derating Curve**

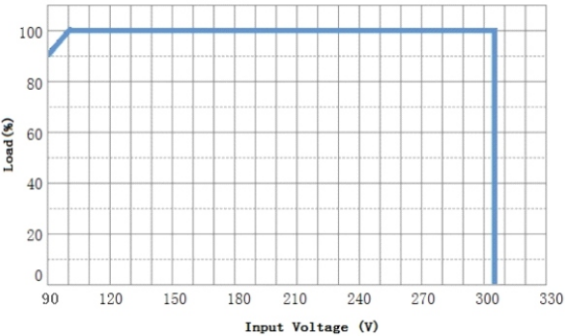


■ **Derating Curve**

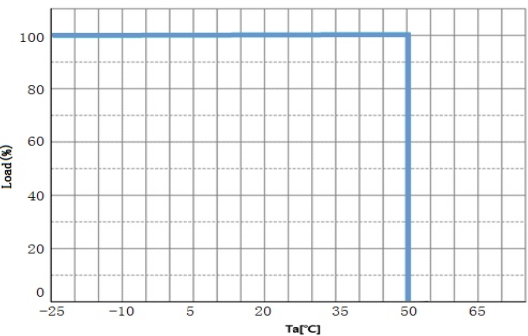


■ **V/I Curve**

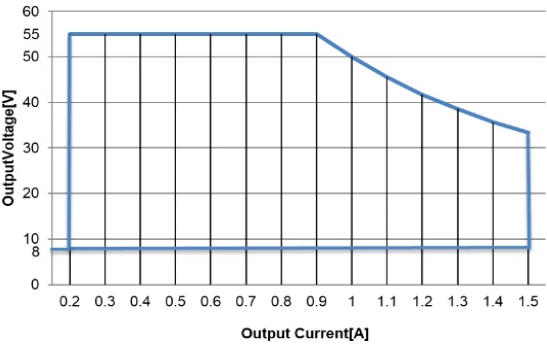

■ **Lifetime Vs Tc**

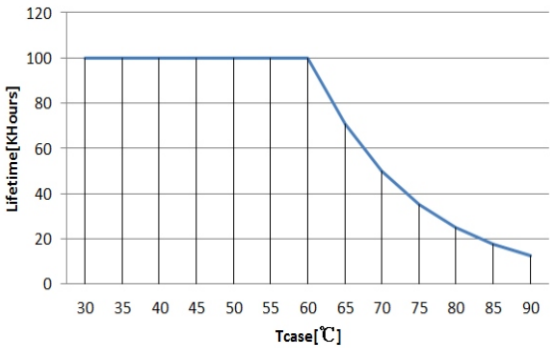


■ **Dimming Curve**

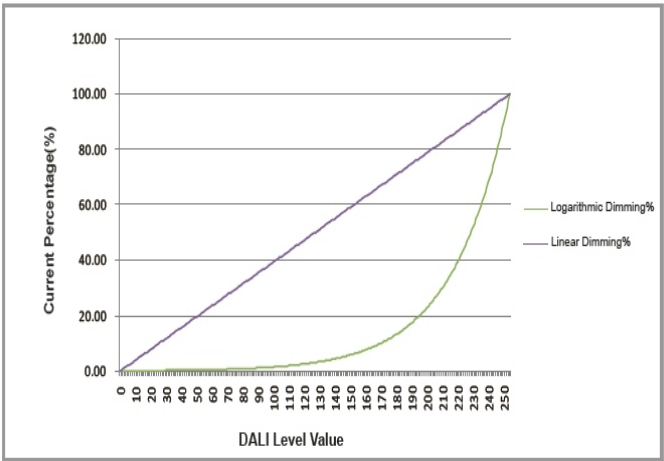


■ **Curve**


■ **PF VS Load Curve**

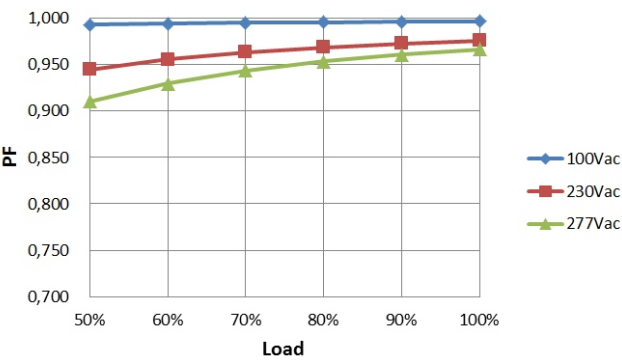


■ **THD VS Load Curve**

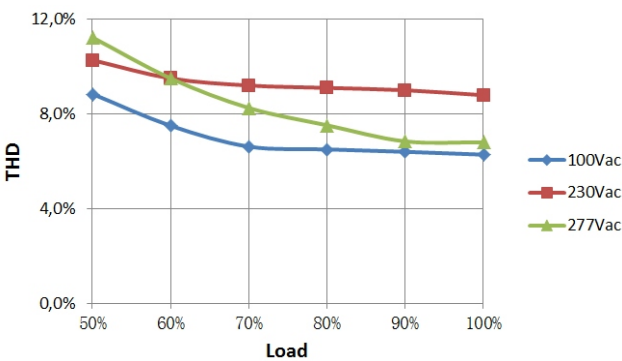


■ **Efficiency VS Load Curve**

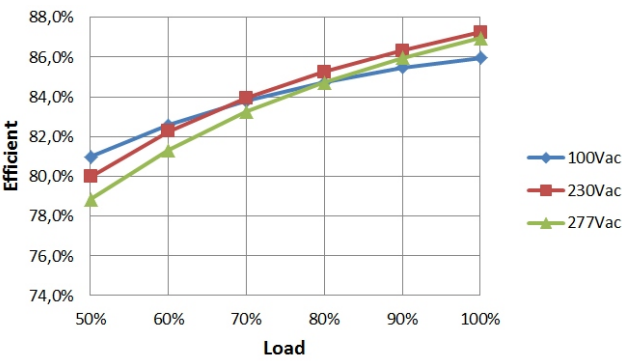

■ **Mechanical Specification**
■ **Dimensions (Unit: mm)**

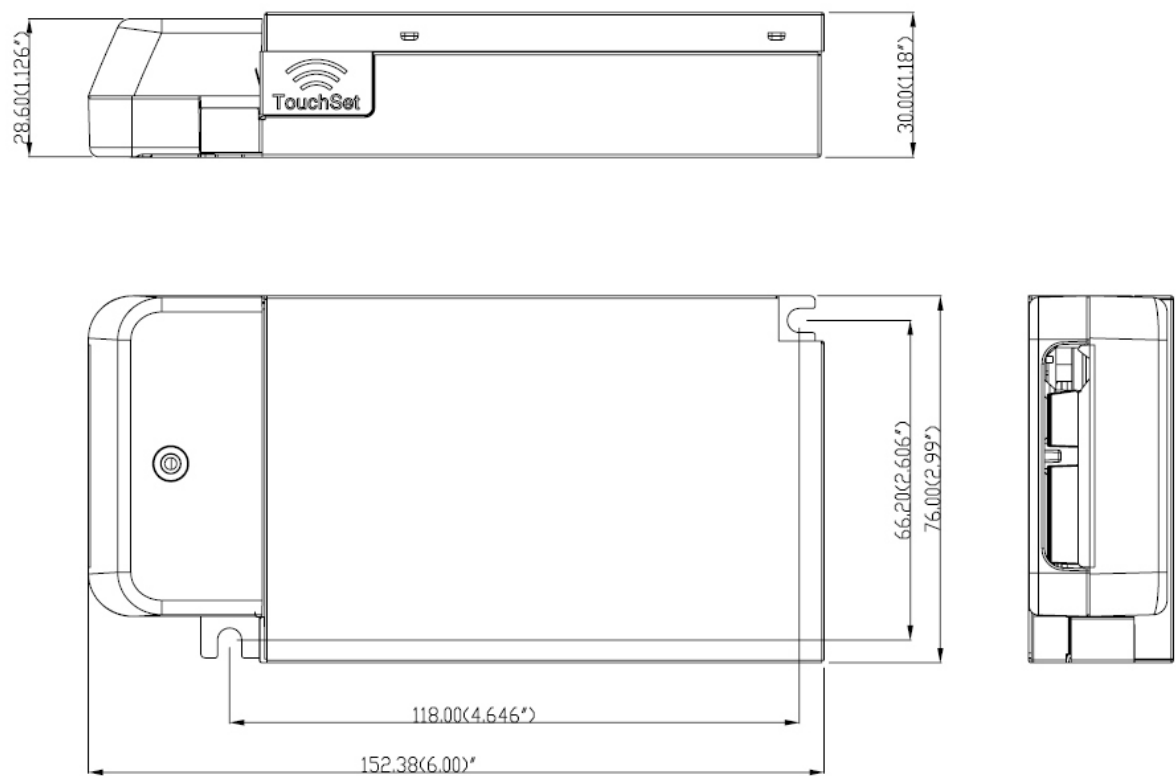

■ **Ports**

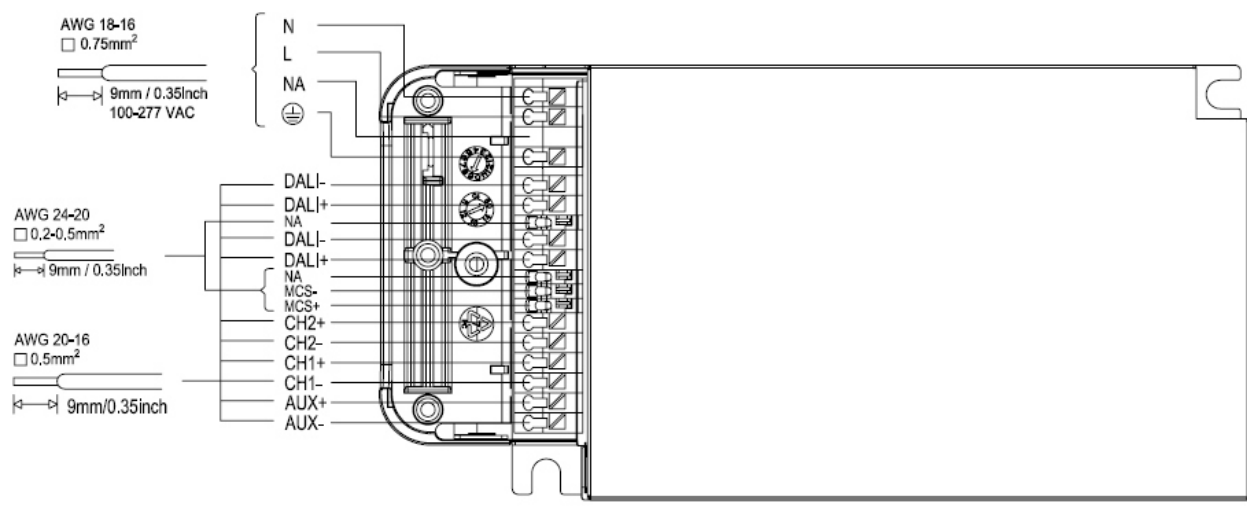

!These terminals are intended for both solid and stranded wire.
!To remove wire, insert screwdriver into slot.

RoHS Compliance:
Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Date of release: 2019-11-20, Version A0