


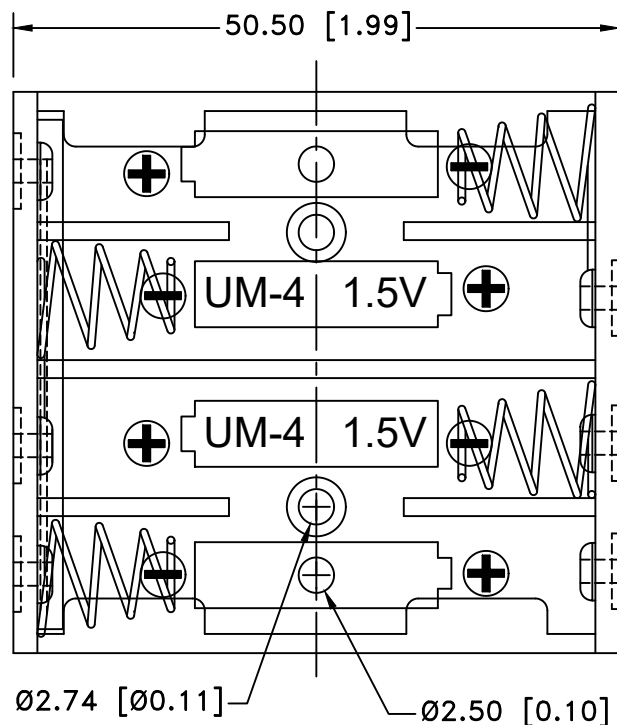

47.52 [1.87]

Ø2.74 [Ø0.11] Ø2.50 [0.10]

11.80 [0.46]

Ø2.37 [0.093]

34.80 [1.37]

21.29 [0.84]


6.38 [0.25]

5.52 [0.22]

11.91 [0.47]

PCB LAYOUT


OUTSIDE EDGE

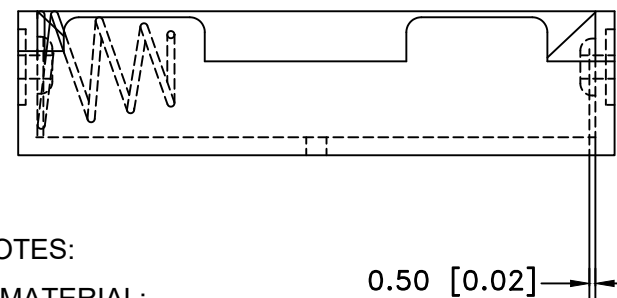

12.19 [0.48]

5.00 [0.20]

0.50 [0.02]

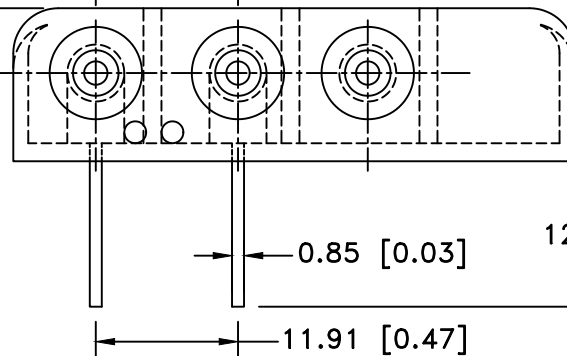

0.85 [0.03]

12.32 [0.48]

11.91 [0.47]

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/14/13	B	UPDATED TITLE	T.B.	B.S.	
07/07/17	C	ADDED DIM. Ø2.74	T.B.	B.S.	
07/22/17	D	DIM. 0.050 WAS 0.051, DIM. 0.85 WAS 1.02	T.B.	B.S.	
03/07/19	E	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE

FLAMMABILITY RATING- UL94-HB, UL FILE NO. E216959

RIVETS: BRASS, NICKEL PLATED.

SPRING: SPRING STEEL, NICKEL PLATED.

PC PINS: SPRING STEEL, NICKEL PLATED.

TEMPERATURE RANGE: -10°C TO +110°C

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance
(Except as noted)



Memory Protection Devices, Inc

200 Broad Hollow Road, Farmingdale, New York 11735

decimal

±.5 (.020)

Scale

Drawn By B.S.

Approved By T.B.

Fractional

± .8 (.030)

Title

FOUR "AAA" CELL HOLDER WITH PC PINS

Angular

± 3°

Date

03/07/19

Drawing Number

BC4AAAPC