

Rotary DIP Switch

A6K/A6KS


Miniature (7.2 × 7.2mm size) Rotary DIP Switch

- Mounting space reduced by 50%.
(compared with conventional models)
- SMT and through hole type Available.
Side-actuated type available.
- Gold-plated contacts ensure high reliability.

RoHS Compliant





Application

Mode setting of MPU
Modem
Controller of servo motor
Coin changer
Program controller




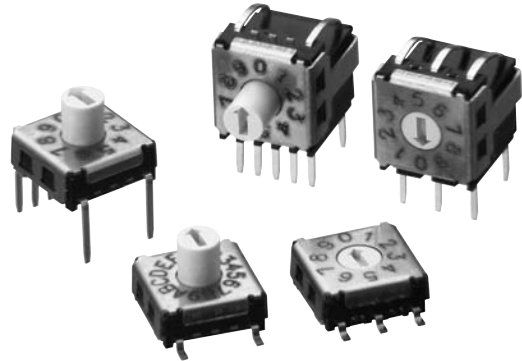


■List of Models


● Through hole (3 × 3 Terminal)

Type (actuator color)			Top-actuated, flat (White)	Top-actuated, extended actuator (White)	Side-actuated, flat (White)	Side-actuated, extended actuator (White)
No. of switching positions						
10	Top :63 Side:60	BCD Decimal	A6K-102RF	A6K-102RS	A6KV-102RF	A6KV-102RS
16		BCD Hexadecimal	A6K-162RF	A6K-162RS	A6KV-162RF	A6KV-162RS



● Through hole (5 × 2 Terminal)

Type (actuator color)			Top-actuated, flat (White)	Top-actuated, extended actuator (White)	Side-actuated, flat (White)	Side-actuated, extended actuator (White)
No. of switching positions						
10	Top :63 Side:60	BCD Decimal	A6K-104RF	A6K-104RS	A6KV-104RF	A6KV-104RS
16		BCD Hexadecimal	A6K-164RF	A6K-164RS	A6KV-164RF	A6KV-164RS


● SMT (3 × 3 Terminal, Tube)

Type (actuator color)			Top-actuated, flat (White)	Top-actuated, extended actuator (White)
No. of switching positions				
10	63	BCD Decimal	A6KS-102RF	A6KS-102RS
16		BCD Hexadecimal	A6KS-162RF	A6KS-162RS



● SMT (5 × 2 Terminal, Tube)

Type (actuator color)			Top-actuated, flat (White)	Top-actuated, extended actuator (White)	Side-actuated, flat (White)	Side-actuated, extended actuator (White)
No. of switching positions	Quantity per tube	Output code				
10	63	BCD Decimal	A6KS-104RF	A6KS-104RS	A6KSV-104RF	A6KSV-104RS
16		BCD Hexadecimal	A6KS-164RF	A6KS-164RS	A6KSV-164RF	A6KSV-164RS

● SMT (3 × 3 Terminal, Embossed tapping Packages)

Type (actuator color)		Top-actuated, flat (White)		Top-actuated, extended actuator (White)	
No. of switching positions	Output code	Minimum packing unit		Minimum packing unit	
10	BCD Decimal	1450	A6KS-102RF-P	850	A6KS-102RS-P
16	BCD Hexadecimal		A6KS-162RF-P		A6KS-162RS-P

● SMT (5 × 2 Terminal, Embossed tapping Packages)

Type (actuator color)		Top-actuated, flat (White)		Top-actuated, extended actuator (White)		Side-actuated, flat (White)		Side-actuated, extended actuator (White)	
No. of switching positions	Output code	Minimum packing unit		Minimum packing unit		Minimum packing unit		Minimum packing unit	
10	BCD Decimal	1450	A6KS-104RF-P	850	A6KS-104RS-P	750	A6KSV-104RF-P	750	A6KSV-104RS-P
16	BCD Hexadecimal		A6KS-164RF-P		A6KS-164RS-P		A6KSV-164RF-P		A6KSV-164RS-P

Note: Order in multiples of the package quantity.

■ Ratings/Characteristics

Rating (resistive load)		25 mA at 24 VDC 10 µA (minimum current) at 3.5 VDC
Ambient operating temperature		−30 to +80°C at 60% max. (with no icing or condensation)
Ambient operating humidity		35% to 95% (at +5 to +35°C)
Insulation resistance		100 MΩ min. (at 250 VDC with insulation tester)
Contact resistance (initial value)		200 mΩ max.
Dielectric strength	Between terminals	250 VAC for 1 min
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Malfunction	300 m/s ² min.
Durability	Electrical	20,000 steps min.
Washing		Not possible
Degree of protection		IEC IP60
Operating torque		1.96 × 10 ^{−2} N·m {2 gf·m} max.
Weight (See note.)	Through hole terminal	Top-actuated, flat: Approx. 0.4 g, Side-actuated, flat: Approx. 0.7 g
	SMT terminal	Top-actuated, flat: Approx. 0.4 g, Side-actuated, flat: Approx. 0.4 g

Note: Add 0.03 g for the extended-actuator type of each model.

Output Codes

10-position Models

Code Position	BCD Decimal code			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

16-position Models

Code Position	BCD Hexadecimal code			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
A		●		●
B	●	●		●
C			●	●
D	●		●	●
E		●	●	●
F	●	●	●	●

Note: "●" indicates that the internal switch is ON.


Dimensions (Unit: mm)

Through hole

● Top-actuated Flat Models with 3 × 3 Terminal Arrangement

A6K-102RF


A6K-162RF

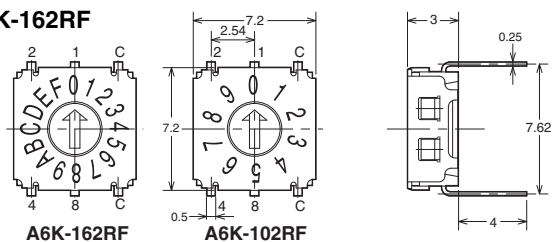

● Top-actuated Extended actuator Models with 3 × 3 Terminal Arrangement

A6K-102RS


A6K-162RS

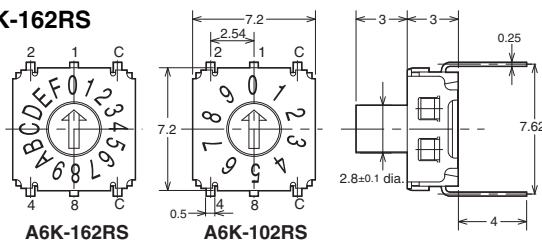

● Side-actuated Flat Models with 3 × 3 Terminal Arrangement

A6KV-102RF


A6KV-162RF

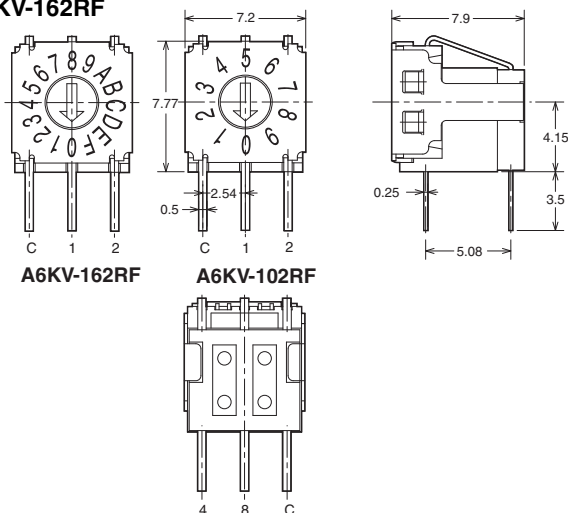

● Side-actuated Extended-actuator Models with 3 × 3 Terminal Arrangement

A6KV-102RS

A6KV-162RS

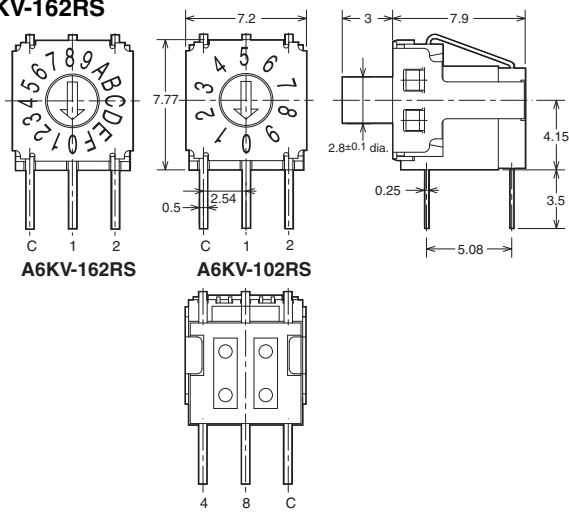


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

● Top-actuated Flat Models with 5 × 2 Terminal Arrangement

A6K-104RF

A6K-164RF

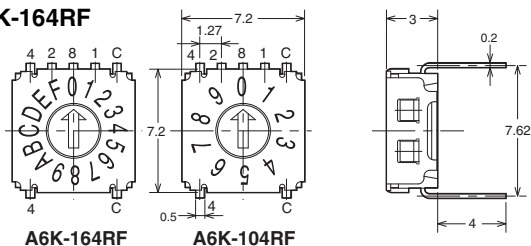


A6K-164RF

A6K-104RF

● Side-actuated Flat Models with 5 × 2 Terminal Arrangement

A6KV-104RF

A6KV-164RF

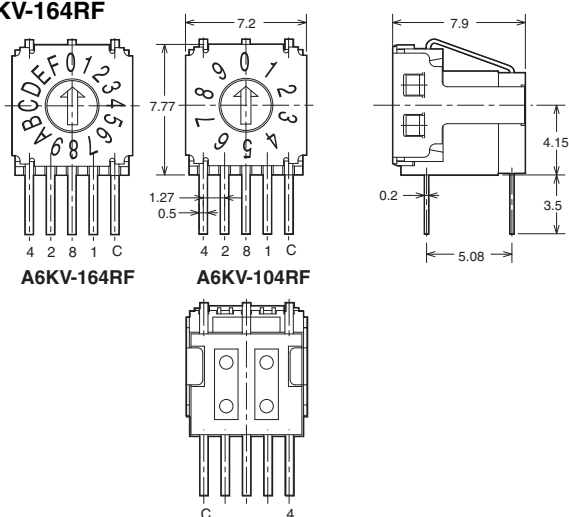


A6KV-164RF

A6KV-104RF

● Top-actuated Extended actuator Models with 5 × 2 Terminal Arrangement

A6K-104RS

A6K-164RS

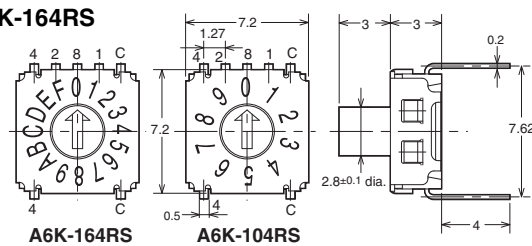


A6K-164RS

A6K-104RS

● Side-actuated Extended-actuator Models with 5 × 2 Terminal Arrangement

A6KV-104RS

A6KV-164RS

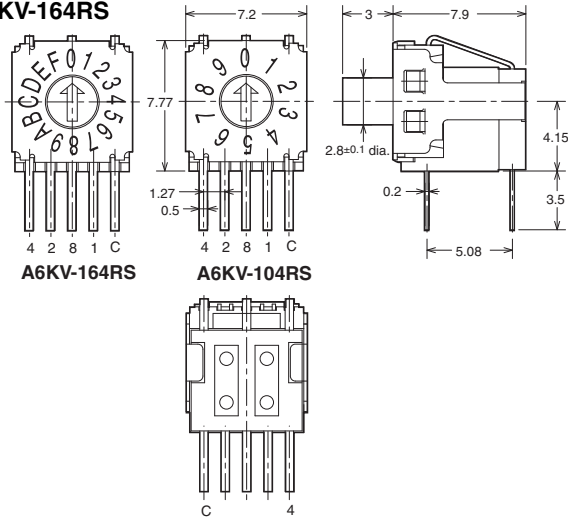

A6KV-164RS


A6KV-104RS

SMT

● Top-actuated Flat Models with 3 × 3 Terminal Arrangement

A6KS-102RF

A6KS-162RF

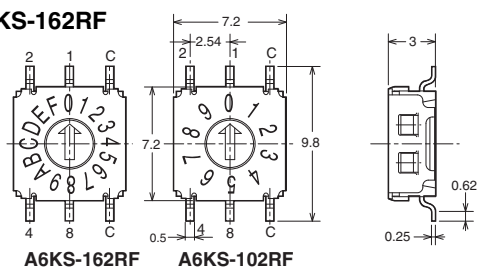


A6KS-162RF

A6KS-102RF

● Top-actuated Extended actuator Models with 3 × 3 Terminal Arrangement

A6KS-102RS

A6KS-162RS

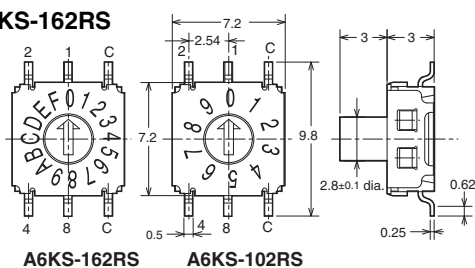


A6KS-162RS

A6KS-102RS

● Top-actuated Flat Models With 5 × 2 Terminal Arrangement

A6KS-104RF

A6KS-164RF

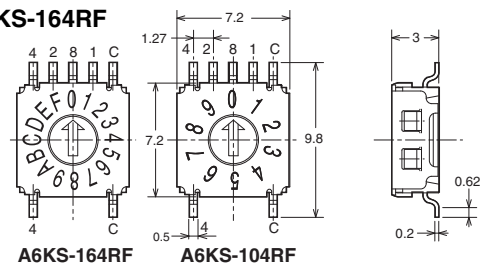


A6KS-164RF

A6KS-104RF

● Top-actuated Extended actuator Models with 5 × 2 Terminal Arrangement

A6KS-104RS

A6KS-164RS

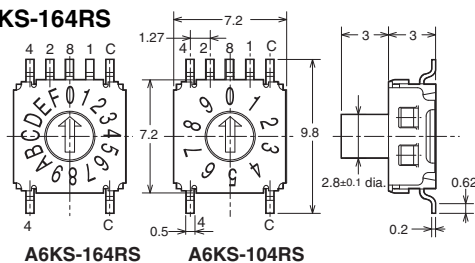

A6KS-164RS


A6KS-104RS

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

● Side-actuated Flat Models with 5 × 2 Terminal Arrangement

A6KSV-104RF


A6KSV-164RF

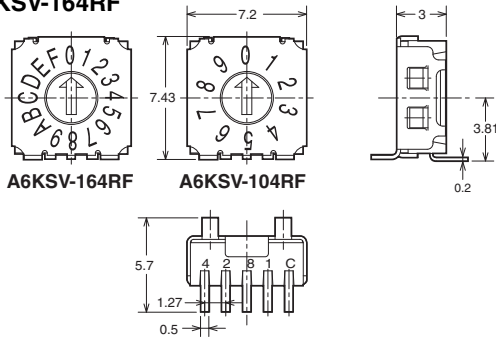

● Side-actuated Extended-actuator Models with 5 × 2 Terminal Arrangement

A6KSV-104RS

A6KSV-164RS

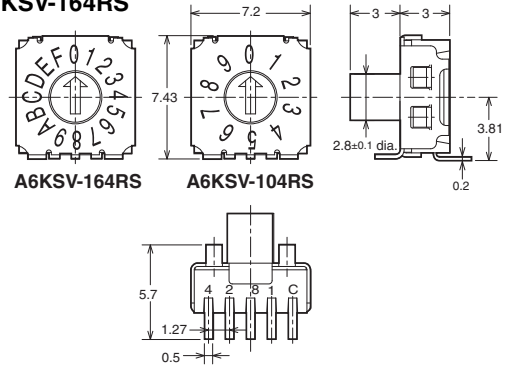


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.


■ PCB Dimensions (Top View) (Unit: mm)

● 3 × 3 Terminal Arrangement


Through hole
(Top-actuated Models)



Through hole
(Side-actuated Models)




SMT
(Top-actuated Models)




● 5 × 2 Terminal Arrangement


Through hole
(Top-actuated Models)




Through hole
(Side-actuated Models)



SMT
(Top-actuated Models)



SMT
(Side-actuated Models)



:Through hole and Pattern prohibited area


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Internal Connections

Contact Form


- Top-actuated/Side-actuated Models with 3×3 Terminal Arrangement (Through hole/SMT)

Actuator side (A6KV)




- Side-actuated Models with 5×2 Terminal Arrangement (Through hole)


Actuator side



- Top-actuated Models with 5×2 Terminal Arrangement (Through hole/SMT)



- Side-actuated Models with 5×2 Terminal Arrangement (SMT)



Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. A174-E1-03
1014(0207)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[A6KS-102RS](#) [A6KS-104RF-P](#) [A6KS-104RS](#) [A6KSV-104RF](#) [A6KSV-104RF-P](#) [A6K-102RF](#) [A6K-102RS](#) [A6K-104RF](#)
[A6K-104RS](#) [A6K-162RF](#) [A6K-162RS](#) [A6K-164RF](#) [A6K-164RS](#) [A6KS-102RF](#) [A6KS-102RF-P](#) [A6KS-102RS-P](#)
[A6KS-104RF](#) [A6KS-104RS-P](#) [A6KS-162RF](#) [A6KS-162RF-P](#) [A6KS-162RS](#) [A6KS-162RS-P](#) [A6KS-164RF](#) [A6KS-](#)
[164RF-P](#) [A6KS-164RS](#) [A6KS-164RS-P](#) [A6KSV-104RS](#) [A6KSV-104RS-P](#) [A6KSV-164RF](#) [A6KSV-164RF-P](#) [A6KSV-](#)
[164RS](#) [A6KSV-164RS-P](#) [A6KV-102RF](#) [A6KV-102RS](#) [A6KV-104RF](#) [A6KV-104RS](#) [A6KV-162RF](#) [A6KV-162RS](#)
[A6KV-164RF](#) [A6KV-164RS](#)