


# Photomicrosensor (Transmissive) EE-SX198


**⚠ Be sure to read *Precautions* on page 25.**

## Dimensions

Note: All units are in millimeters unless otherwise indicated.

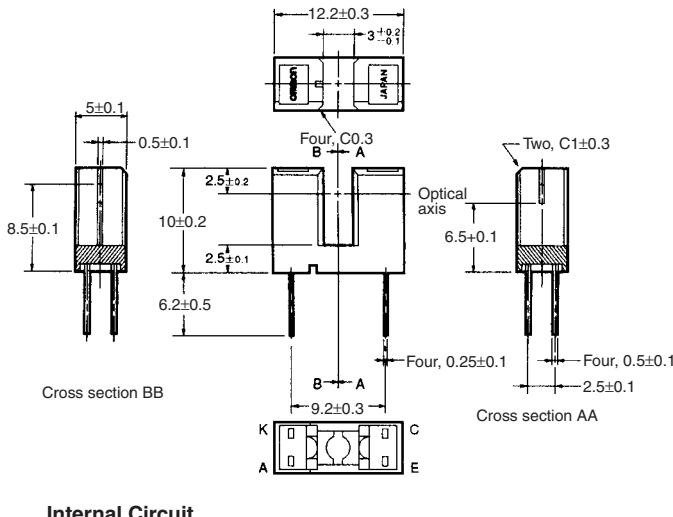

Internal Circuit



Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Unless otherwise specified,  
the tolerances are  $\pm 0.2$  mm.

## Features

- General-purpose model with a 3-mm-wide slot.
- PCB mounting type.
- High resolution with a 0.5-mm-wide aperture.

## Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

	Item	Symbol	Rated value
Emitter	Forward current	$I_F$	50 mA (see note 1)
	Pulse forward current	$I_{FP}$	1 A (see note 2)
	Reverse voltage	$V_R$	4 V
Detector	Collector-Emitter voltage	$V_{CEO}$	30 V
	Emitter-Collector voltage	$V_{ECO}$	---
	Collector current	$I_C$	20 mA
	Collector dissipation	$P_C$	100 mW (see note 1)
Ambient temperature	Operating	$T_{opr}$	-25°C to 85°C
	Storage	$T_{stg}$	-30°C to 100°C
Soldering temperature		$T_{sol}$	260°C (see note 3)


- Note:
- Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
  - The pulse width is 10  $\mu\text{s}$  maximum with a frequency of 100 Hz.
  - Complete soldering within 10 seconds.

## Electrical and Optical Characteristics ( $T_a = 25^\circ\text{C}$ )


Item		Symbol	Value	Condition
Emitter	Forward voltage	$V_F$	1.2 V typ., 1.4 V max.	$I_F = 30$ mA
	Reverse current	$I_R$	0.01 $\mu\text{A}$ typ., 10 $\mu\text{A}$ max.	$V_R = 4$ V
	Peak emission wavelength	$\lambda_P$	940 nm typ.	$I_F = 20$ mA
Detector	Light current	$I_L$	0.5 mA min., 14 mA max.	$I_F = 20$ mA, $V_{CE} = 5$ V
	Dark current	$I_D$	2 nA typ., 200 nA max.	$V_{CE} = 20$ V, $0 \Omega$
	Leakage current	$I_{LEAK}$	---	---
	Collector-Emitter saturated voltage	$V_{CE}$ (sat)	0.1 V typ., 0.4 V max.	$I_F = 40$ mA, $I_L = 0.5$ mA
	Peak spectral sensitivity wavelength	$\lambda_P$	850 nm typ.	$V_{CE} = 10$ V
Rising time		$tr$	4 $\mu\text{s}$ typ.	$V_{CC} = 5$ V, $R_L = 100 \Omega$ , $I_L = 5$ mA
Falling time		$tf$	4 $\mu\text{s}$ typ.	$V_{CC} = 5$ V, $R_L = 100 \Omega$ , $I_L = 5$ mA

## ■ Engineering Data


**Forward Current vs. Collector Dissipation Temperature Rating**

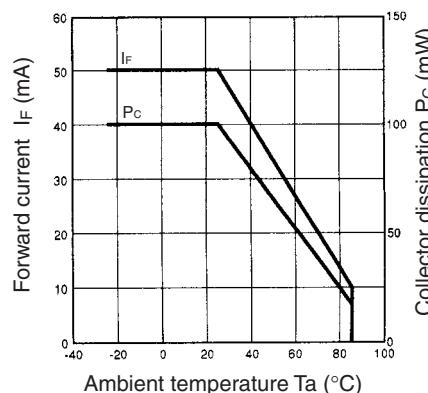


**Light Current vs. Collector-Emitter Voltage Characteristics (Typical)**

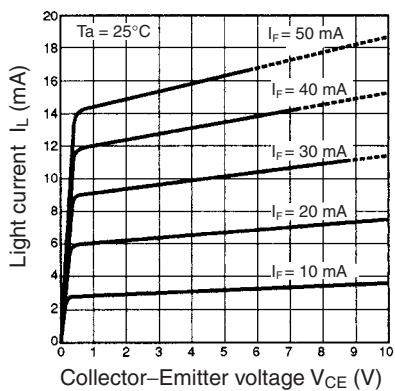


**Response Time vs. Load Resistance Characteristics (Typical)**

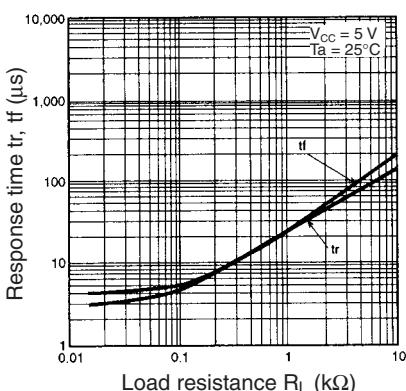


**Response Time Measurement Circuit**

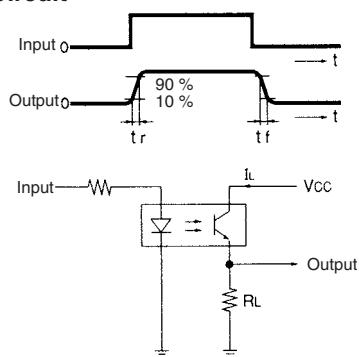


**Forward Current vs. Forward Voltage Characteristics (Typical)**

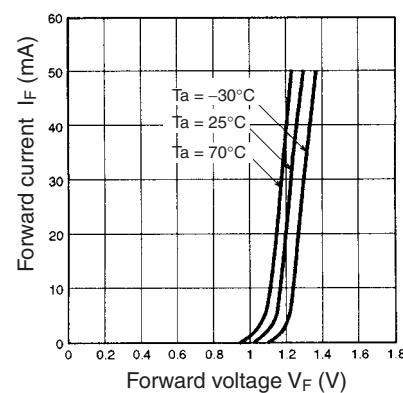


**Light Current vs. Forward Current Characteristics (Typical)**

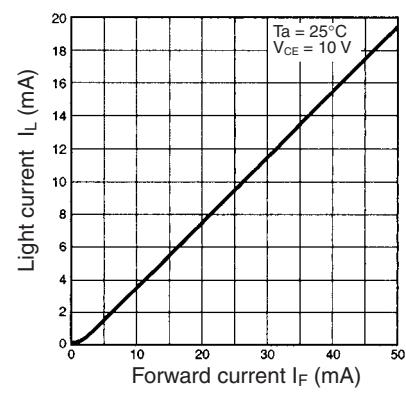

**Dark Current vs. Ambient Temperature Characteristics (Typical)**

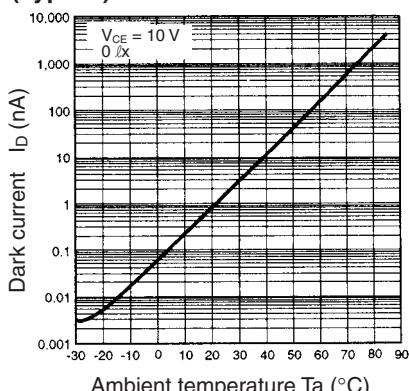

**Sensing Position Characteristics (Typical)**

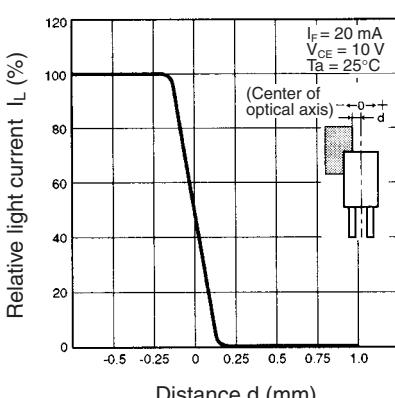

**Sensing Position Characteristics (Typical)**

