

# Type BLC-110 Fuse Block 10 Pole – Regular Auto Blade



www.optifuse.com

(619) 593-5050

## Specifications:

**Max Current Rating:** 25A per Circuit - 150A Max Input

**Max Voltage:** 32VDC

**Fuse Type:** Regular Auto Blade (APR series)

**Base:** Polycarbonate



**Terminals:** 10 ea Copper, Tin plated 0.250" Quick Connect Terminals,

1 ea #10-32 stud terminal with hex nut, flat washer and lockwasher supplied.

**Mounting:** 4 mounting holes for #10-32 screws (not supplied)

**Cover available:** BLC-110-C

## Mechanical Dimensions: Inches [mm]

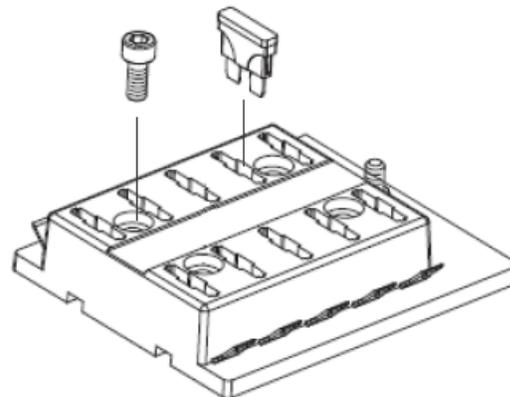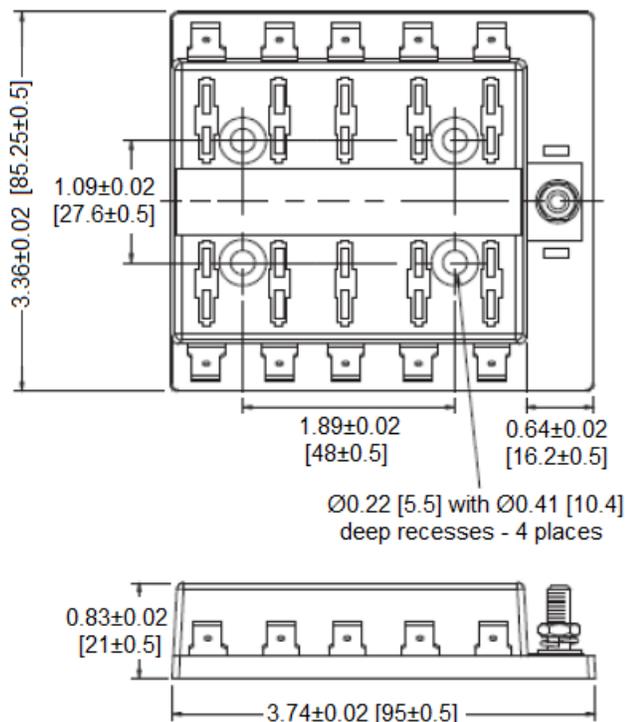

### Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev C 01/2012 - Page: 1/1  
Code B01-01H