



**! To Be Discontinued**  
Last time buy: September 30, 2017

### 1 Form A type Radio frequent switching

PhotoMOS®  
RF 1 Form A  
(AQV22○)

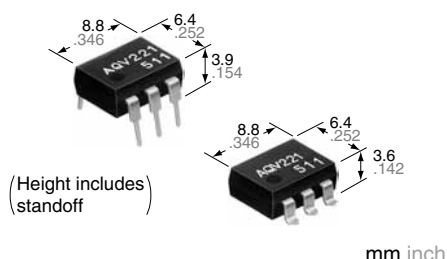

RoHS compliant

### FEATURES

#### 1. High frequency characteristics with low capacitance between output terminals

Low output capacitance: typ. 4.8 pF  
Isolation loss: 40 dB or more (at 1 MHz)  
(AQV225)

#### 2. High speed switching

Turn on time: typ. 0.1 ms  
Turn off time: typ. 0.03 ms

#### 3. Low-level off state leakage current of typ. 0.03 nA

#### 4. Controls low-level analog signals

PhotoMOS® features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

### TYPICAL APPLICATIONS

#### 1. Measuring instruments

Scanner, IC checker, Board tester, etc.

#### 2. Audio visual equipment

CD, VCR

#### 3. Security equipment

### TYPES

	Output rating*		Package	Part No.				Packing quantity	
	Load voltage	Load current		Through hole terminal	Surface-mount terminal				
							Tube packing style	Tape and reel packing style	
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side				
AC/DC dual use	40 V	80 mA	DIP6-pin	AQV221	AQV221A	AQV221AX	AQV221AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs
	80 V	50 mA		AQV225	AQV225A	AQV225AX	AQV225AZ		

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING


#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED forward current	I <sub>F</sub>		50 mA		
	LED reverse voltage	V <sub>R</sub>		5 V		
	Peak forward current	I <sub>FP</sub>		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW		
Load voltage (peak AC)		V <sub>L</sub>		40 V	80 V	
Output	Continuous load current	I <sub>L</sub>	A	0.08 A	0.05 A	A connection: Peak AC, DC B, C connection: DC
			B	0.09 A	0.06 A	
			C	0.12 A	0.075 A	
	Peak load current	I <sub>peak</sub>		0.18 A	0.15 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		230 mW		
	Total power dissipation			P <sub>T</sub>	280 mW	
I/O isolation voltage		V <sub>iso</sub>	1,500 V AC			
Temperature limits	Operating	T <sub>opr</sub>		−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures
	Storage	T <sub>stg</sub>		−40°C to +100°C −40°F to +212°F		

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED operate current	Typical	I <sub>Fon</sub>	—	0.9 mA		I <sub>L</sub> = Max.
		Maximum			3 mA		
	LED turn off current	Minimum	I <sub>Foff</sub>	—	0.4 mA		I <sub>L</sub> = Max.
		Typical			0.85 mA		
	LED dropout voltage	Typical	V <sub>F</sub>	—	1.25 V (1.14 V at I <sub>F</sub> = 5 mA)		I <sub>F</sub> = 50 mA
Maximum		1.5 V					
Output	On resistance	Typical	R <sub>on</sub>	A	22 Ω	36 Ω	I <sub>F</sub> = 5 mA
		Maximum			35 Ω	50 Ω	I <sub>L</sub> = Max. Within 1 s on time
		Typical	R <sub>on</sub>	B	13 Ω	21 Ω	I <sub>F</sub> = 5 mA
		Maximum			18 Ω	25 Ω	I <sub>L</sub> = Max. Within 1 s on time
		Typical	R <sub>on</sub>	C	6.5 Ω	10.5 Ω	I <sub>F</sub> = 5 mA
		Maximum			9 Ω	12.5 Ω	I <sub>L</sub> = Max. Within 1 s on time
	Output capacitance	Typical	C <sub>out</sub>	—	5.6 pF	4.8 pF	I <sub>F</sub> = 0 mA
		Maximum			8 pF		V <sub>B</sub> = 0 V f = 1 MHz
	Off state leakage current	Typical	I <sub>Leak</sub>	—	0.03 nA		I <sub>F</sub> = 0 mA
Maximum		10 nA (1 nA or less)*			V <sub>L</sub> = Max.		
Transfer characteristics	Turn on time**	Typical	T <sub>on</sub>	—	0.1 ms		I <sub>F</sub> = 5 mA
		Maximum			0.3 ms		I <sub>L</sub> = Max.
	Turn off time**	Typical	T <sub>off</sub>	—	0.03 ms		I <sub>F</sub> = 5 mA
		Maximum			0.1 ms		I <sub>L</sub> = Max.
	I/O capacitance	Typical	C <sub>iso</sub>	—	0.8 pF		f = 1 MHz
		Maximum			1.5 pF		V <sub>B</sub> = 0 V
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ		500 V DC

\*Available as custom orders (1 nA or less)  
\*\*Turn on/Turn off time

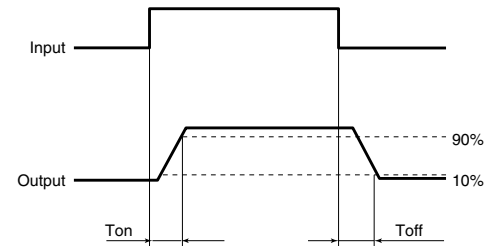

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5	mA


■ These products are not designed for automotive use.  
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A

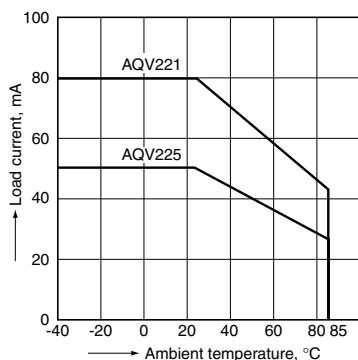


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

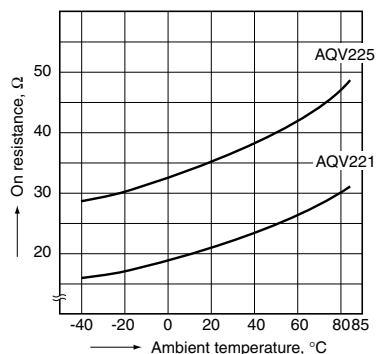


### 3. Turn on time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

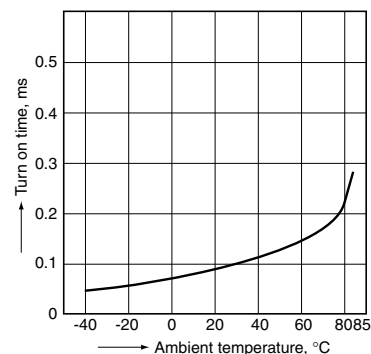


### 4. Turn off time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

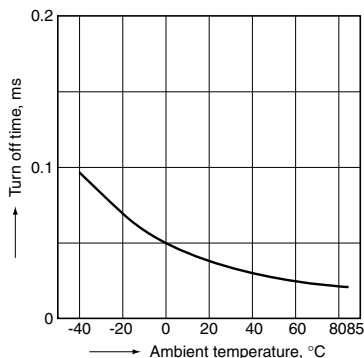


### 5. LED operate current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

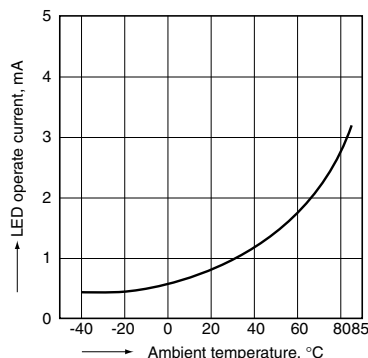


### 6. LED turn off current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

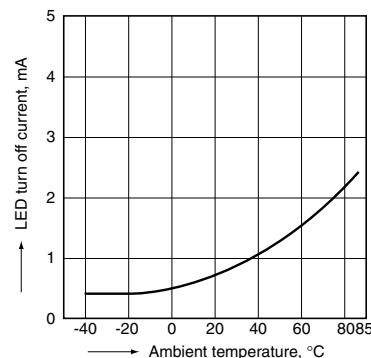


### 7. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
LED current: 5 to 50 mA

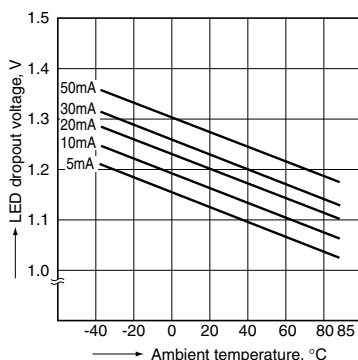


### 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$




### 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

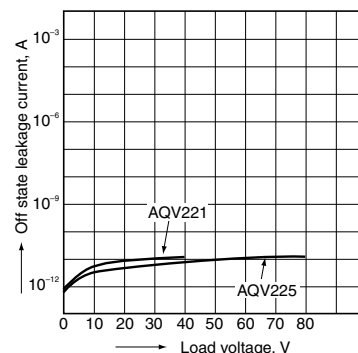


#### 10. Turn on time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

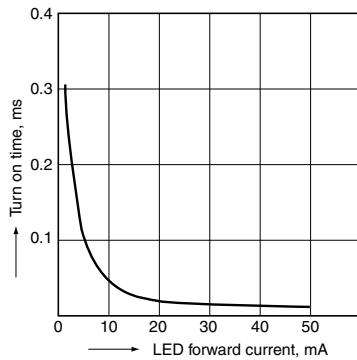


#### 11. Turn off time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

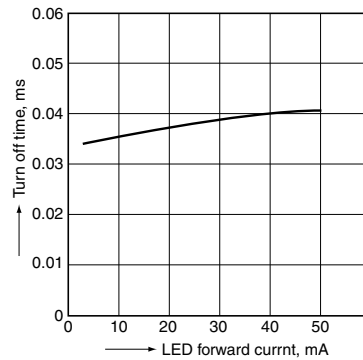


#### 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

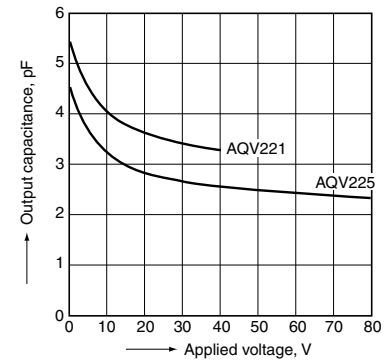


#### 13. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

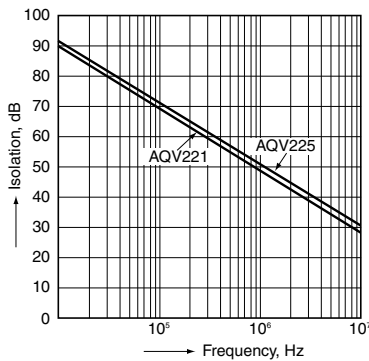

#### 14. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

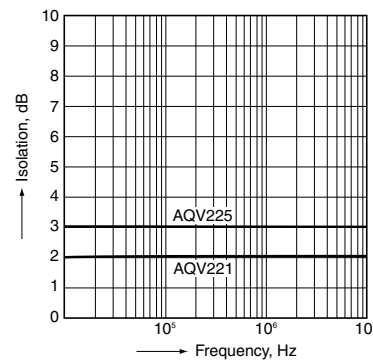

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2016

ASCTB152E 201609-T

Specifications are subject to change without notice.