



Miniature SOP8-pin type
Low on-resistance
200V load voltage

PhotoMOS®
RF SOP 2 Form A
Low on-resistance (AQW227NS)



mm inch



RoHS compliant

FEATURES

1. 2-channel (Form A) in SOP8-pin package miniature
(W) 4.4 × (L) 9.37 × (H) 2.1 mm (W) .173 × (L) .369 × (H) .083 inch —approx. 38% of the volume and 66% of the footprint size of DIP8-pin.

2. Low output capacitance

Low output capacitance
The capacitance between output terminals is small; Typ. 10pF.

High response speed

This enables a fast operation speed of
Typ. 0.25ms.

3. Low-level off state leakage current

4. Controls low-level analog signals

TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computer input machines
- Industrial robots

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC dual use	200V	40mA	SOP8-pin	AQW227NS	AQW227NSX	AQW227NSZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.

* Indicate the peak AC and DC values.

Note: The packing style indicator “X” or “Z” is not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW227NS	Remarks
Input	LED forward current	I_F	50 mA	
	LED reverse voltage	V_R	5 V	
	Peak forward current	I_{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW	
Output	Load voltage (peak AC)	V_L	200 V	
	Continuous load current	I_L	0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I_{peak}	0.15 A	100 ms (1 shot), V_L = DC
	Power dissipation	P_{out}	600 mW	
Total power dissipation		P_T	650 mW	
I/O isolation voltage		V_{iso}	1,500 Vrms	
Ambient temperature	Operating	T_{opr}	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T_{stg}	-40 to +100°C -40 to +212°F	


RF SOP 2 Form A Low on-resistance (AQW227NS)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW227NS	Condition
Input	LED operate current	Typical	I _{Fon}	0.7mA	I _L =Max.
		Maximum		3.0mA	
	LED turn off current	Minimum	I _{Foff}	0.4mA	I _L =Max.
		Typical		0.65mA	
	LED dropout voltage	Typical	V _F	1.25V (1.14V at I _F =5mA)	I _F =50mA
		Maximum		1.5V	
Output	On resistance	Typical	R _{on}	30Ω	I _F =5mA I _L =Max. Within 1 s
		Maximum		50Ω	
	Output capacitance	Typical	C _{out}	10pF	I _F =0mA V _B =0V f=1 MHz
		Maximum		15pF	
	Off state leakage current	Maximum	I _{Leak}	*10nA	I _F =0mA V _L =Max.
	Transfer characteristics	Turn on time**	Typical	T _{on}	0.25ms
Maximum			0.5ms		
Turn off time**		Typical	T _{off}	0.08ms	I _F =5mA I _L =Max.
		Maximum		0.2ms	
I/O capacitance		Typical	C _{iso}	0.8pF	f=1MHz V _B =0V
		Maximum		1.5pF	
Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ	500V DC	

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

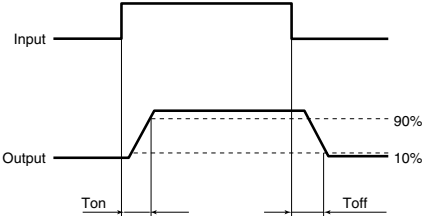

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item		Symbol	Number of used channels	Min.	Max.	Unit
AQW227NS	LED current	I _F		5	30	mA
	Load voltage (Peak AC)	V _L		—	160	V
	Continuous load current	I _L	1ch 2ch	—	0.05 0.04	A

■ These products are not designed for automotive use.
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

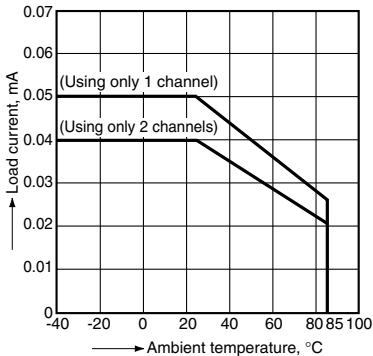


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

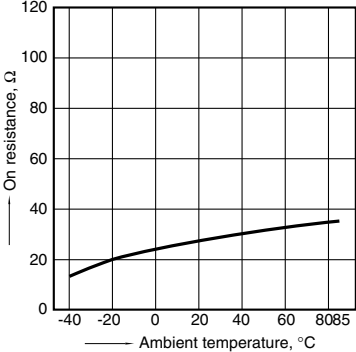


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

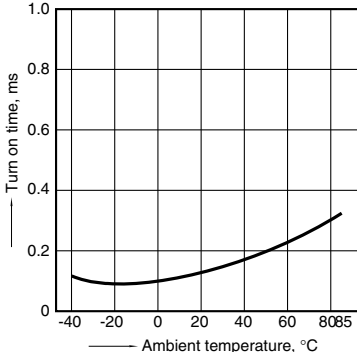


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

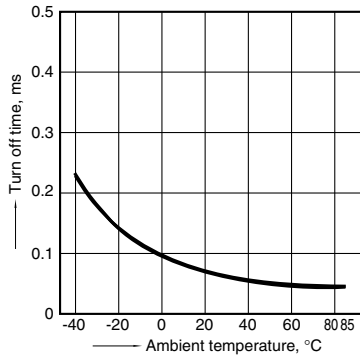


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

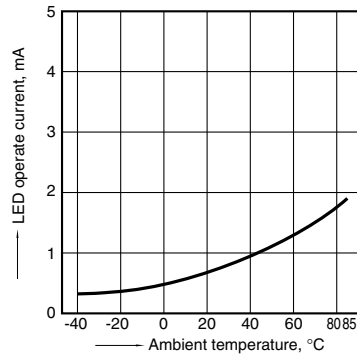


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

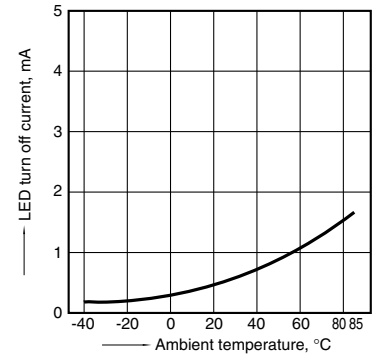


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

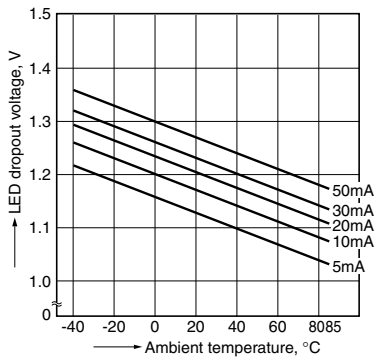


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

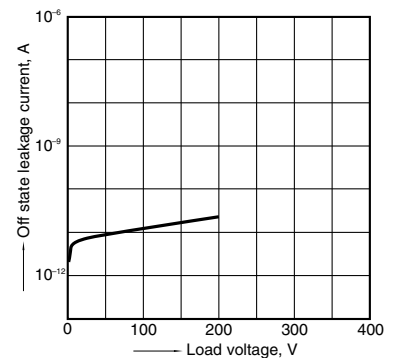


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

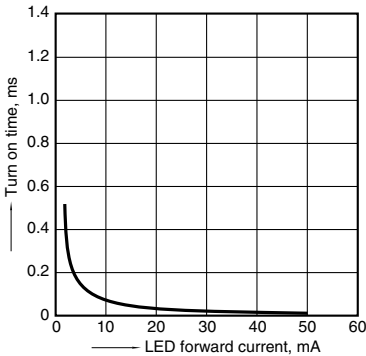


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

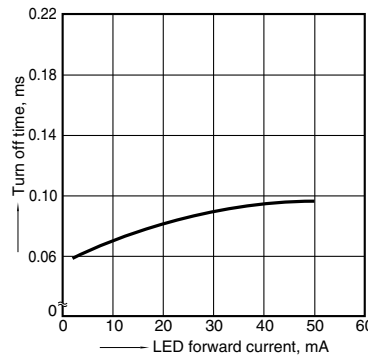


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

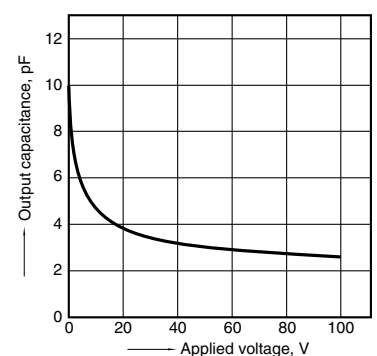


13. Isolation vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

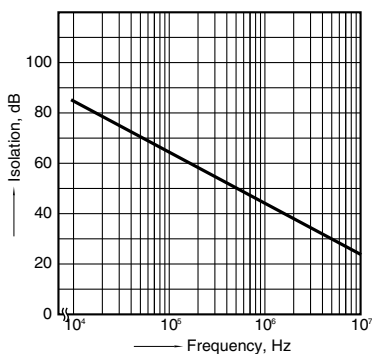

14. Insertion loss vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

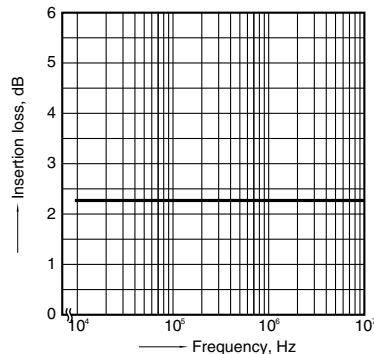

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

ASCTB157E 201703-T

Specifications are subject to change without notice.