

6.1 mm×4.0 mm Side-operational SMD
Light Touch Switches

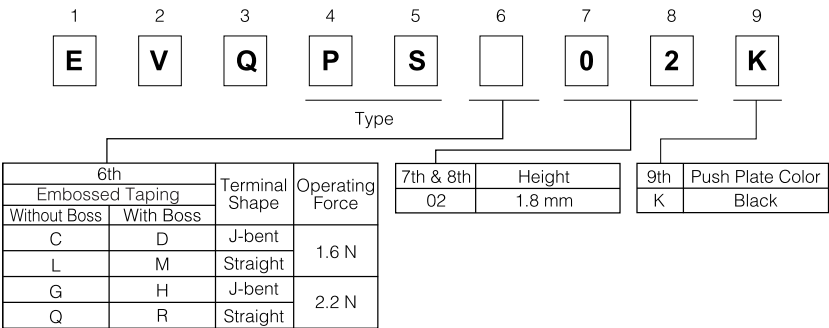
Type: **EVQPS**



- **Features**
 - External dimensions : 6.1 mm×4.0 mm, Height 1.8 mm
 - Terminal shapes : straight, J-bent

- **Recommended Applications**
 - Car navigation, Car audio

■ **Explanation of Part Numbers**







■ **Specifications**

Type		Snap action / Push-on type SPST	
Electrical	Rating	10 μA 2 Vdc to 50 mA 12 Vdc (Resistiv load)	
	Contact Resistance	500 mΩ max.	
	Insulation Resistance	100 MΩ min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	10 ms max. (ON, OFF)	
Mechanical	Operating Force	1.6 N ^{+0.7} _{-0.4} N	2.2 N ^{+0.8} _{-0.7} N
	Travel	0.3 mm ^{+0.1} _{-0.2} mm	
	Push Strength	30 N for 1 minute	
Endurance	Operating Life	100000 cycles min.	
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk)	
		-20 °C to +60 °C (Taping)	
Minimum Quantity/Packing Unit		4000 pcs. Embossed Taping (Reel Pack)	
Quantity/Carton		16000 pcs.	

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.












00 Oct. 2012

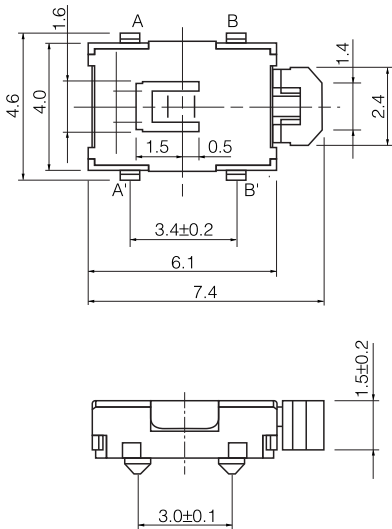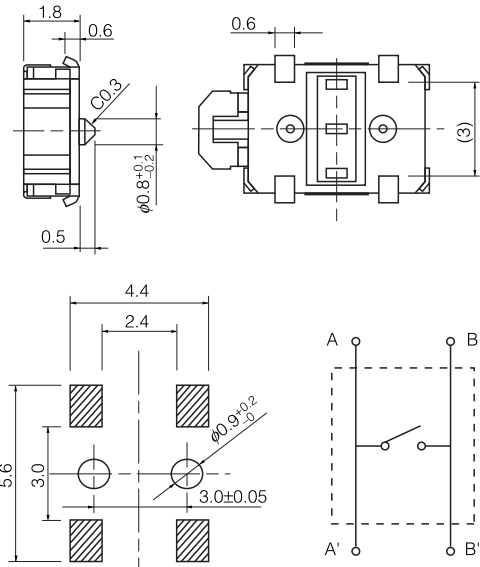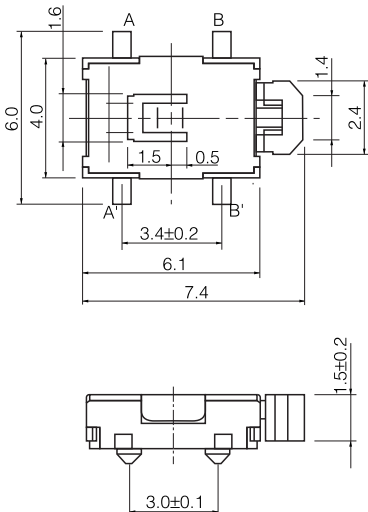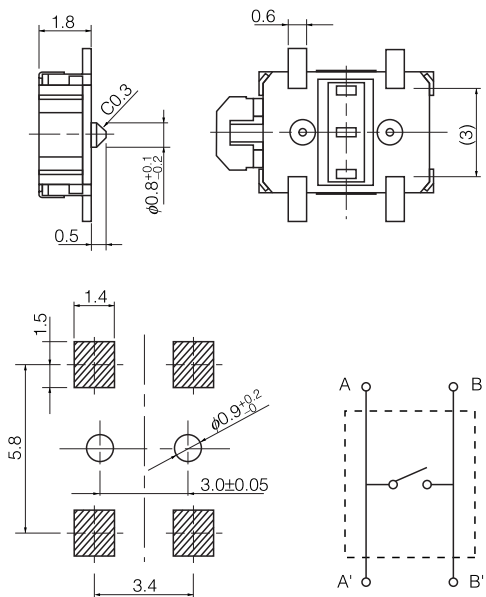■ Dimensions in mm (not to scale)

No. 1 EVQPSD EVQPSH J-bent terminals, with Boss 	  PWB land pattern for reference (Tolerance:±0.1) Circuit Diagram			
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQPSD02K	1.6 N	1.8 mm	Black	100000 cycles
EVQPSH02K	2.2 N	1.8 mm	Black	100000 cycles
No. 2 EVQPSM EVQPSR Straight terminals, with Boss 	  PWB land pattern for reference (Tolerance:±0.1) Circuit Diagram			
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQPSM02K	1.6 N	1.8 mm	Black	100000 cycles
EVQPSR02K	2.2 N	1.8 mm	Black	100000 cycles


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

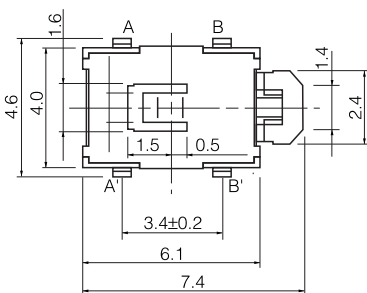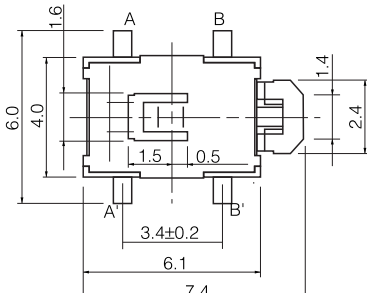■ Dimensions in mm (not to scale)


No. 3 EVQPSC EVQPSG J-bent terminals, without Boss 	 PWB land pattern for reference (Tolerance:±0.1) Circuit Diagram			
Part Numbers EVQPSC02K EVQPSG02K	Operating Force 1.6 N 2.2 N	Height 1.8 mm 1.8 mm	Push Plate Color Black Black	Operating Life 100000 cycles 100000 cycles
No. 4 EVQPSL EVQPSQ Straight terminals, without Boss 	 PWB land pattern for reference (Tolerance:±0.1) Circuit Diagram			
Part Numbers EVQPSL02K EVQPSQ02K	Operating Force 1.6 N 2.2 N	Height 1.8 mm 1.8 mm	Push Plate Color Black Black	Operating Life 100000 cycles 100000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

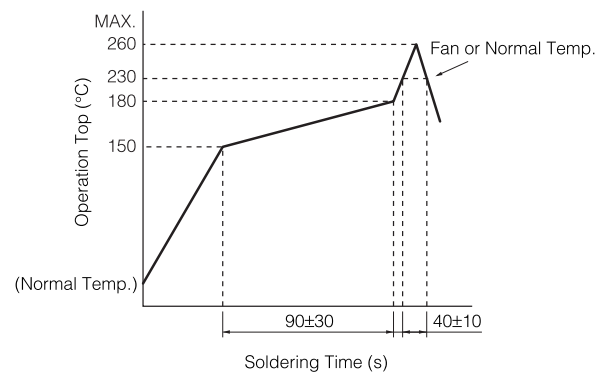■ Recommended Reflow Soldering Conditions




● Embossed Carrier Taping

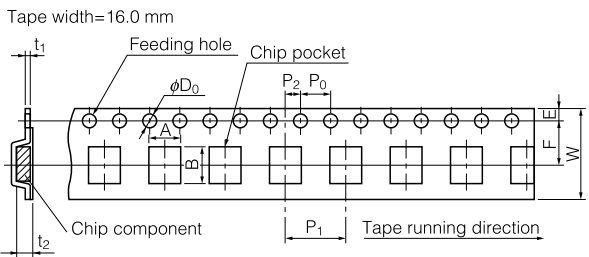

Unit: mm

Part No.	Height	A	B	W	F	E	P_1	P_2	P_0	D_0 Dia.	t_1	t_2
EVQPS	1.8	6.8 ± 0.2	8.0 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.10	8.0 ± 0.1	2.0 ± 0.1	4.0 ± 0.1	$1.5^{+0.1}_{-0}$	0.30 ± 0.05	2.7 ± 0.2

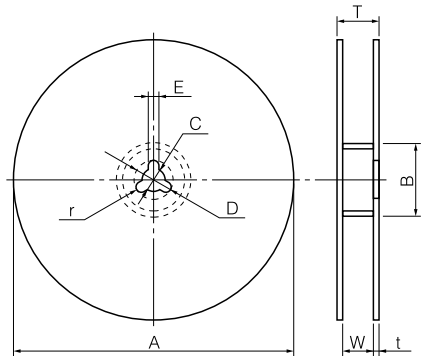● Standard Reel Dimensions in mm (not to scale)



Item	A	B	C	D	E
Rate (mm)	$\phi 370.0 \pm 2.0$	$\phi 50.0$ min.	$\phi 13.0 \pm 0.5$	$\phi 21.0 \pm 1.0$	2.0 ± 0.5

Item	W	T	t	r
Rate (mm)	18.0 ± 1.5	—	1.0 to 3.0	1.0 ± 0.5