

PART

NUMBER

TWO PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED. SEE TABLE FOR DIMENSIONS OF PARTS WITH ADDITIONAL PORTS.


CONDUCTOR

PORTS

5

DIM VVLVV

6.43

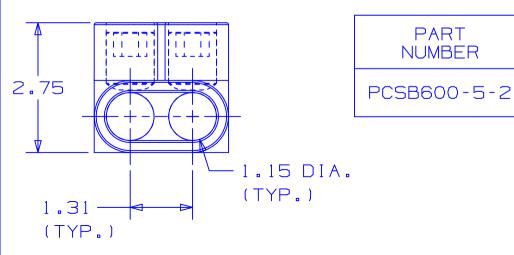

## NOTES:

- 1. UL 486B LISTED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- 2. WIRE RANGE: 600kcmil-4 AWG STR ONLY ONE CONDUCTOR PER PORT ALLOWED.
- 3. STRIP LENGTH: .56 +.06/-0
- 4. HEX KEY SIZE: 3/8". TIGHTENING TORQUE 375 IN/LB.
- 5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
- 6. TEMPERATURE RATING: 90° C.
- 7. CONNECTOR BLOCK BODY, AND CLAMPING SCREWS ARE MADE FROM ALUMINUM, PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
- 8. INSULATION MATERIAL IS CLEAR PVC.
- 9. CLAMPING SCREW ACCESS PORTS AND CONDUCTOR PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- 10. ALL DIMENSIONS SHOWN ARE NOMINAL.
- 11. PACKAGE QTY: -2 = 2 PCS.





C41366\_00

									]	
									CORP.	TINLEY PARK, ILLINOIS
								MULTI-TAP IN		
00	11/02	CJW		DRAWING RELEASED				PCSB 600 SERIES		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	РМ	DRAWN BY CJW CHK'D	SCALE N/A	DRAWING NO. C41366