


Product Description

The SDS compact subwoofer family offers low resonant frequency performance, ideally suited for compact sealed enclosures. This 5.25 inch 6 ohm member of the SDS family offer a coated paper cone with rubber surround, a high power voice coil suspended in a ferrite magnet motor, and a narrow-profile steel cabinet, shaped to fit into narrow cabinet.




Mechanical Drawing

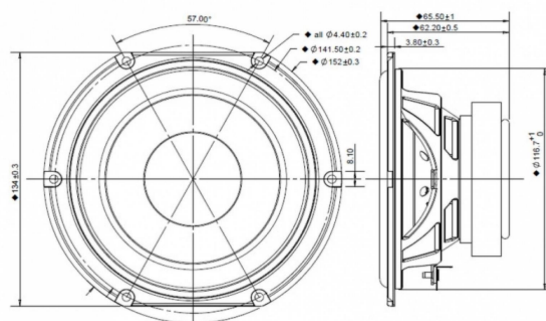

Specifications

DC Resistance	RevC	Ohms	6.06	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	6.54	7.5%	Moving Mass	Mms	g	9.3
Voice Coil Inductance	Le	mH	0.37		Suspension Compliance	Cms	um/N	833.2
Resonant Frequency	Fs	Hz	57.23	15%	Effective Cone diameter	D	cm	10.5
Mechanical Q Factor	Qms		3.6		Effective Piston Area	Sd	cm^2	86.6
Electrical Q Factor	Qes	0.7			Effective Volume	Vas	L	8.77
Total Q Factor	Qts		0.59		Motor Force Factor	BL	Tm	5.36
Ratio Fs/Qts	F	Fs/Qts	97.33		Motor Efficiency Factor	ß	(T*M^2)/Ohms	4.7
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	85.7	+/- 1.0db	Voice coil former Material	VCFm		ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	84.8	+/- 1.0db	Voice coil inner diameter	VCd	mm	25.73
Gap Height	Gh	mm	6		Rated Noise Power	P	W	60
Maximum Linear Excursion	Xmax	mm	3.5		Test Spectrum Bandwidth	50Hz - 5kHz		
Ferrofluid Type	FF				Driver Size	Inch	5.25 in	
Driver Mass	Kg	0.68						

Frequency and Impedance Response

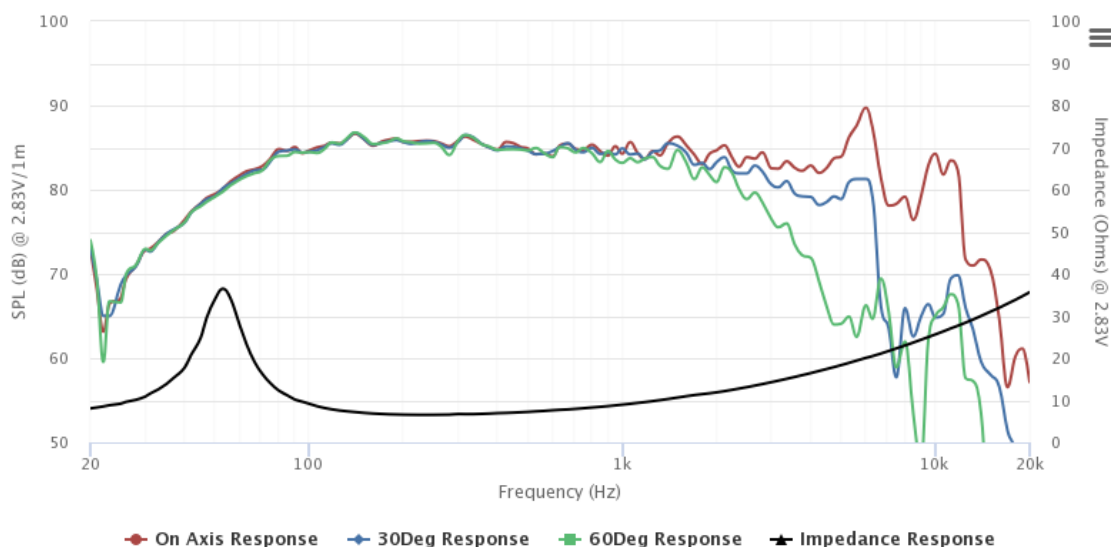

Highcharts.com