

Model No:: TC7FD04-04
Product Line: Tymphany


Rev: 1
Last Update: 2017-04-25 21:32:09

Product Description

This TC family full-range driver,with 2.5Inch 4Ohm paper cone and fabric surround, is designed to be a cost-effective high performance full range driver. The cone utilizes Tymphany-patented PentaCut NRSC cone technology to help dampen and control cone resonances, optimizing the listening experience. The motor contains a copper cap to lower inductance and distortion. The product was designed with column speaker and other high sensitivity full range applications in mind.




Mechanical Drawing

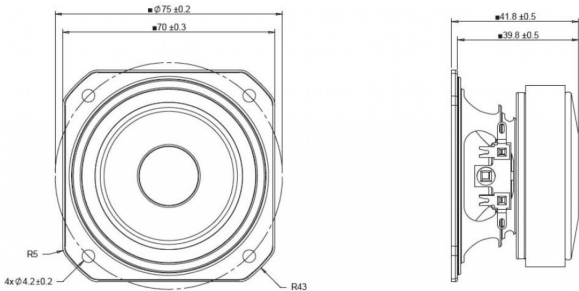

Specifications

| | | | | | | | |
|-------------------------------|-------------|--------|--------|-----------|----------------------------|--------------|--------------|
| DC Resistance | Revc | Ohms | 3.45 | 5.0% | Energy Bandwidth Product | EBP | (1/Qes)*fs |
| Minimum Impedance | Zmin | Ohms | 4.41 | 7.5% | Moving Mass | Mms | g |
| Voice Coil Inductance | Le | mH | 0.02 | | Suspension Compliance | Cms | um/N |
| Resonant Frequency | Fs | Hz | 201.81 | 15% | Effective Cone diameter | D | cm |
| Mechanical Q Factor | Qms | | 3.39 | | Effective Piston Area | Sd | cm^2 |
| Electrical Q Factor | Qes | 0.88 | | | Effective Volume | Vas | L |
| Total Q Factor | Qts | | 0.7 | | Motor Force Factor | BL | Tm |
| Ratio Fs/Qts | F | Fs/Qts | 288.3 | | Motor Efficiency Factor | β | (T*M^2)/Ohms |
| Half Space Sensitivity @2.83V | db@2.83V/1M | dB | 90.56 | +/- 1.0db | Voice coil former Material | VCfm | ASV |
| Half Space Sensitivity @1W/1M | db@1W/1M | dB | 88 | +/- 1.0db | Voice coil inner diameter | VCd | mm |
| Gap Height | Gh | mm | 3 | | Rated Noise Power | P | W |
| Maximum Linear Excursion | Xmax | mm | 1 | | Test Spectrum Bandwidth | 200Hz -10kHz | |
| Ferrofluid Type | FF | | | | Driver Size | Inch | 2.5 in |
| Driver Mass | Kg | 0.32 | | | | | |

Frequency and Impedance Response

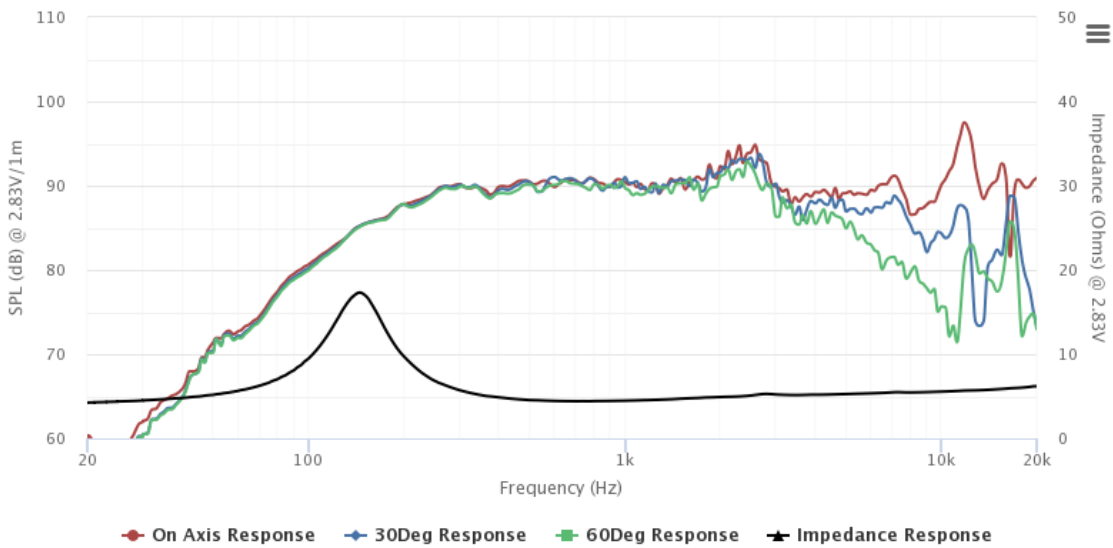

Highcharts.com