

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 8-position, PUR halogen-free, black-gray RAL 7021, Plug straight M8, on Socket angled M8, cable length: 0.3 m

### Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Our standard: robust halogen-free PUR cable
- ✓ Save space – with high-pos. connectors

RoHS

### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                 |
| GTIN         |  |
| GTIN         | 4046356681216                                                                        |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 0.3 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |          |
|-----------------------|----------|
| Rated current at 40°C | 1.5 A    |
| Rated voltage         | 30 V AC  |
|                       | 30 V DC  |
| Number of positions   | 8        |
| Insulation resistance | ≥ 100 MΩ |

# Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

## Technical data

### General

|                              |                              |
|------------------------------|------------------------------|
| Coding                       | A - standard                 |
| Standards/regulations        | M8 connector IEC 61076-2-104 |
| Status display               | No                           |
| Protective circuit/component | unwired                      |
| Degree of pollution          | 3                            |
| Insertion/withdrawal cycles  | ≥ 100                        |
| Torque                       | 0.2 Nm (M8 connectors)       |

### Material

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |

### Standards and Regulations

|                                        |                              |
|----------------------------------------|------------------------------|
| Standards/specifications               | M8 connector IEC 61076-2-104 |
| Flammability rating according to UL 94 | HB                           |

### Cable

|                                               |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| Cable abbreviation                            | Li9Y11Y                                            |
| UL AWM style                                  | 20549                                              |
| Conductor cross section                       | 8x 0.14 mm <sup>2</sup> (Signal line)              |
| AWG signal line                               | 26                                                 |
| Conductor structure signal line               | 18x 0.10 mm                                        |
| Core diameter including insulation            | 1 mm ±0.02 mm (Signal line)                        |
| Thickness, insulation                         | ≥ 0.21 mm (Signal line)                            |
|                                               | ≥ 0.38 mm (Outer cable sheath)                     |
| Wire colors                                   | white, brown, green, yellow, gray, pink, blue, red |
| Overall twist                                 | 8 wires around filler to the core                  |
| Length of twist, overall twist                | 58 mm                                              |
| External sheath, color                        | black-gray RAL 7021                                |
| External cable diameter D                     | 5.1 mm ±0.15 mm                                    |
| Smallest bending radius, fixed installation   | 25.5 mm                                            |
| Smallest bending radius, movable installation | 51 mm                                              |
| Number of bending cycles                      | 4000000                                            |
| Bending radius                                | 51 mm                                              |
| Traversing path                               | 10 m                                               |
| Traversing rate                               | 3 m/s                                              |
| Acceleration                                  | 10 m/s <sup>2</sup>                                |
| Outer sheath, material                        | PUR                                                |

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

### Technical data

#### Cable

|                                 |                                                            |
|---------------------------------|------------------------------------------------------------|
| Material, filler                | PE                                                         |
| Material conductor insulation   | PP                                                         |
| Conductor material              | Bare Cu litz wires                                         |
| Insulation resistance           | 1 GΩ*km (at 20 °C)                                         |
| Conductor resistance            | 139 Ω/km (at 20 °C)                                        |
| Nominal voltage, cable          | ≤ 300 V AC                                                 |
| Test voltage, cable             | ≥ 3000 V AC (Spark test)                                   |
| Flame resistance                | according to UL 758/1581 (horizontal)                      |
|                                 | in accordance with UL 758/1581 FT2                         |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                   |
|                                 | in accordance with DIN EN 50267-2-1                        |
| Resistance to oil               | According to DIN EN 60811-2-1, 168 h at 100°C              |
| Other resistance                | hydrolysis and microbe resistant                           |
|                                 | Resistant to salt water                                    |
|                                 | Low adhesion                                               |
|                                 | abrasion-resistant                                         |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)               |
|                                 | -25 °C ... 80 °C (cable, flexible installation)            |


#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201


Schematic diagram

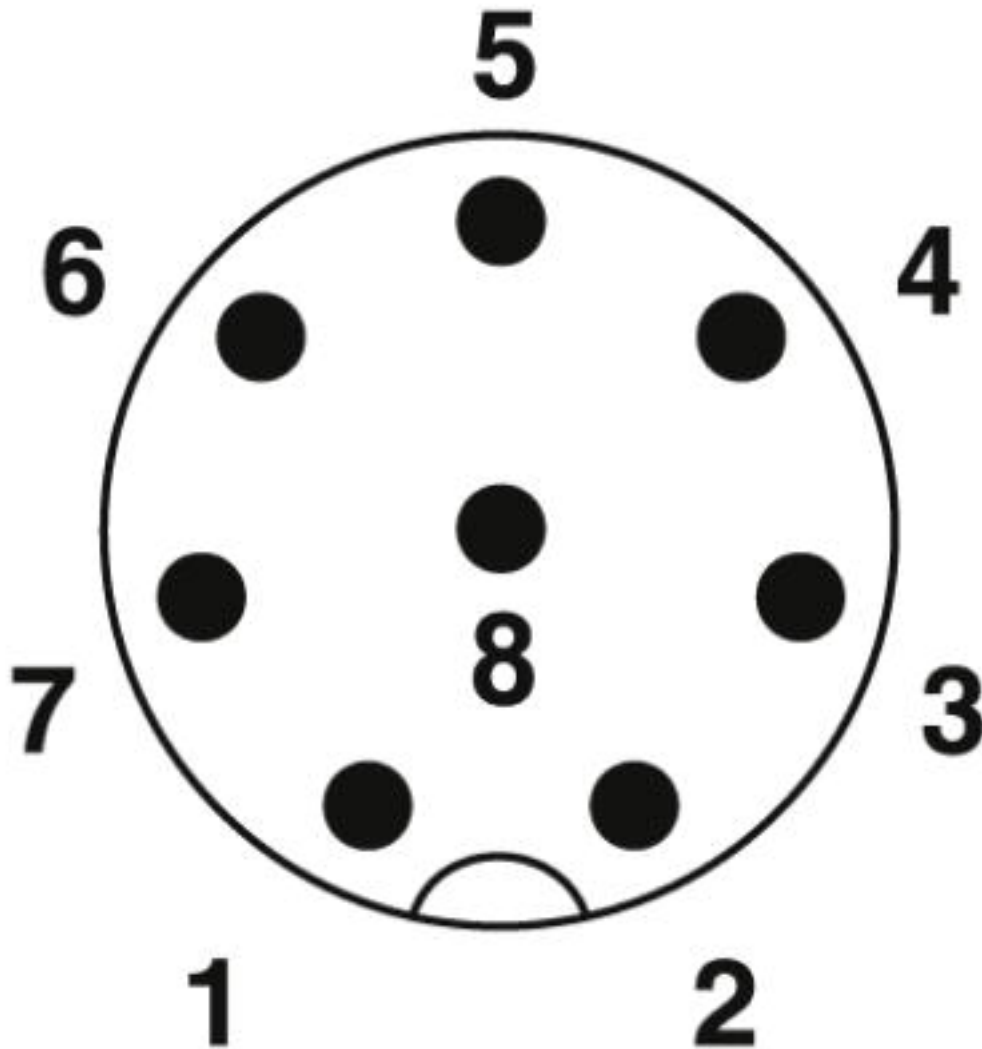

M8 plug pin assignment, 8-pos., view of pin side

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201


Schematic diagram

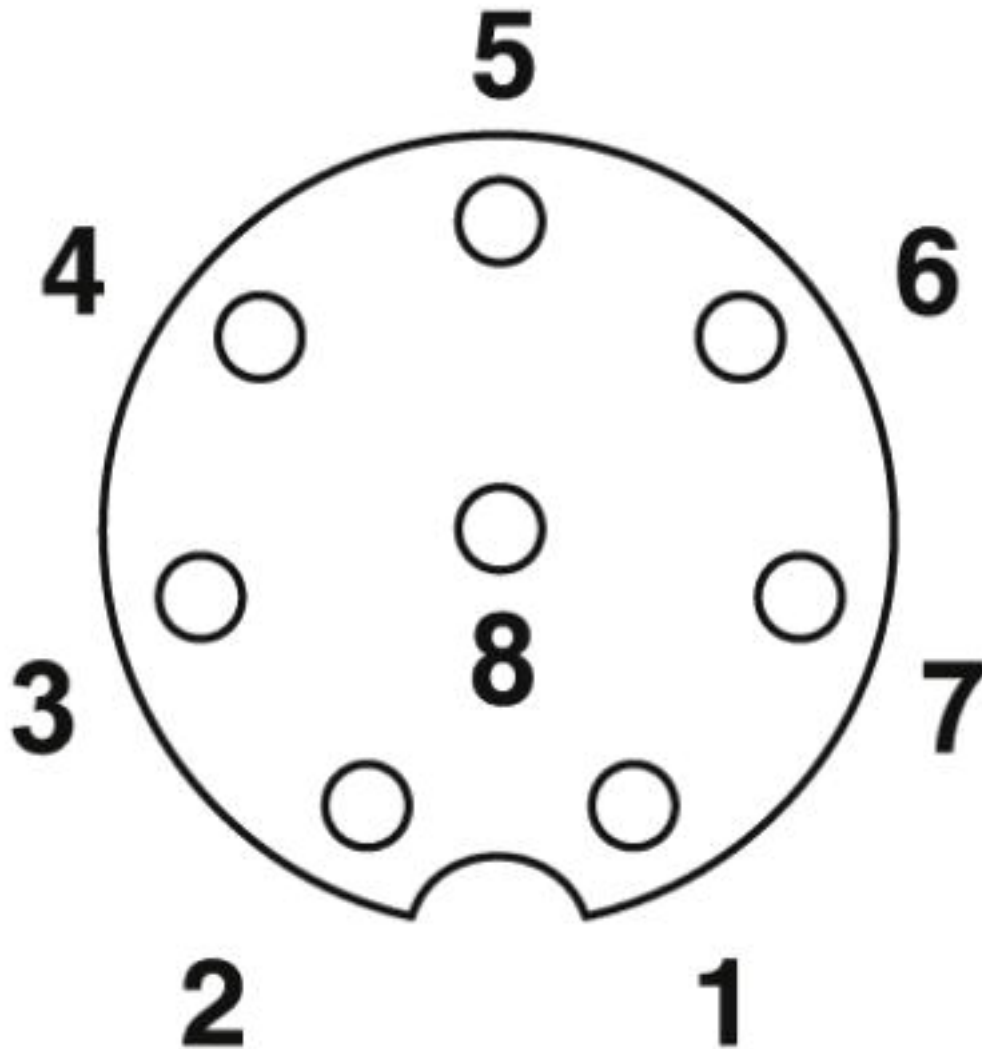

Connector pin assignment of M8 socket, 8-pos., view of socket side


## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

Dimensional drawing

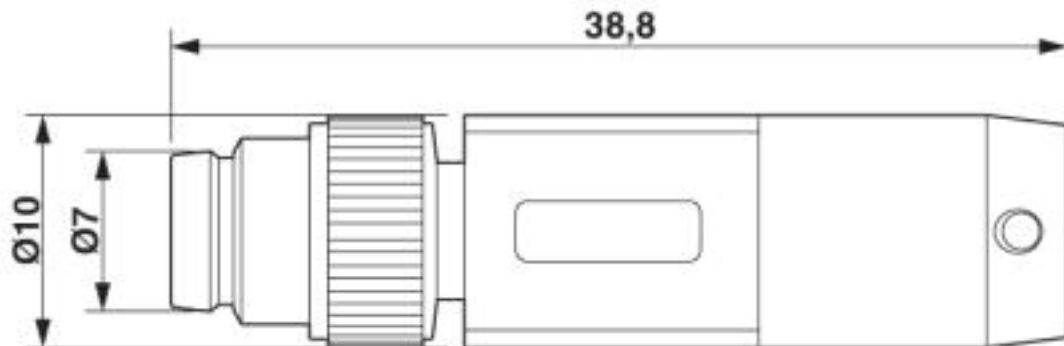

M8 x 1 male plug, straight version

Dimensional drawing

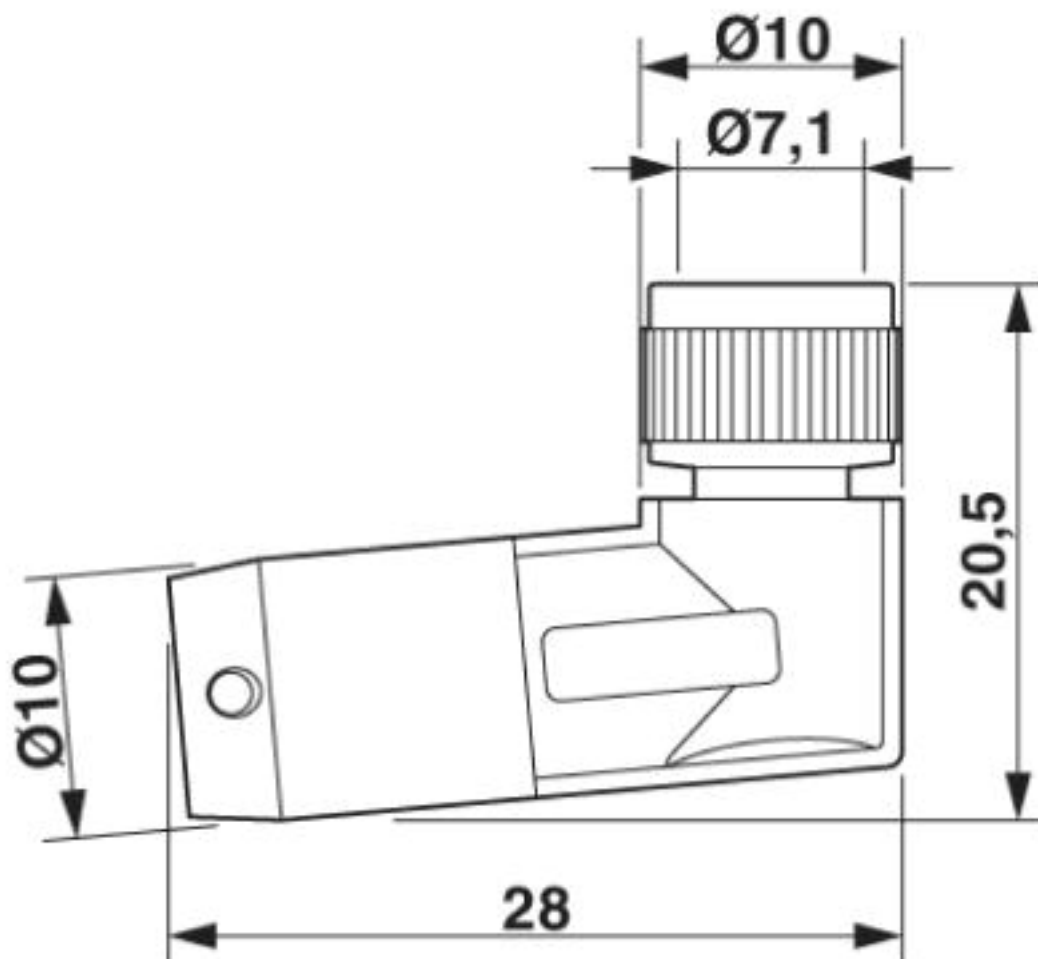

Socket M8 x 1, angled

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

Circuit diagram



Contact assignment of M8 plugs/sockets

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

Cable cross section



PUR halogen-free black [PUR]

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27060311 |
| eCl@ss 4.0    | 27060300 |
| eCl@ss 4.1    | 27060300 |
| eCl@ss 5.0    | 27061800 |
| eCl@ss 5.1    | 27061800 |
| eCl@ss 6.0    | 27279200 |
| eCl@ss 7.0    | 27279218 |
| eCl@ss 8.0    | 27279218 |
| eCl@ss 9.0    | 27060311 |

# Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |
| ETIM 7.0 | EC001855 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 19.0   | 31251501 |
| UNSPSC 20.0   | 31251501 |
| UNSPSC 21.0   | 31251501 |

## Approvals

### Approvals

#### Approvals

UL Listed / cUL Listed / cULus Listed

#### Ex Approvals

### Approval details

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Listed          |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN | 30 V                                                                                |                                                                                                                                                       |               |
| Nominal current IN | 1.5 A                                                                               |                                                                                                                                                       |               |

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Listed         |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN | 30 V                                                                                |                                                                                                                                                       |               |
| Nominal current IN | 1.5 A                                                                               |                                                                                                                                                       |               |

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

### Approvals

cULus Listed



### Accessories

#### Accessories

#### Conductor marking

Insert label - PABA WH/23 - 1013779



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

Insert label - PABA YE/23 - 1013782



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

#### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

#### Plug for cable screw gland

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860



M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets

#### Protective cap

## Sensor/actuator cable - SAC-8P-M 8MS/ 0,3-PUR/M 8FR - 1404201

### Accessories

Sealing cap - PROT-M 8 FS-PA-CHAIN - 1430857

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



---

### Screwdriver tools

Tool - SAC BIT M8-D10 - 1208461



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

---

### Torque tool

Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>