

## Housing - HC-STA-D07-SHCWS-1SGM20-PL-BK - 1419268

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting bases D7, with single locking latch, material: PA, cable outlets: 1, lateral, height: 28 mm, cable gland: with, support sleeve: no, 1x M20, Standard, enclosed bottom



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 055626 160191 |
| GTIN         | 4055626160191                                                                                           |

### Technical data

#### Dimensions

|                         |                |
|-------------------------|----------------|
| Height                  | 28 mm          |
| Width                   | 38 mm          |
| Length                  | 24.2 mm        |
| External cable diameter | 4 mm ... 10 mm |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection (IP)       | IP66              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

#### General

|                      |                                                                         |
|----------------------|-------------------------------------------------------------------------|
| Note                 | for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12 |
| Size                 | D7                                                                      |
| Housing type         | Box mounting bases                                                      |
| Color                | black                                                                   |
| Locking type         | with single locking latch                                               |
| No. of cable outlets | 1                                                                       |
| Cable outlet         | lateral                                                                 |
| Screw connection     | with                                                                    |

# Housing - HC-STA-D07-SHCWS-1SGM20-PL-BK - 1419268

## Technical data

### General


|                                        |                        |
|----------------------------------------|------------------------|
| Type of the screw connection           | 1x M20                 |
| Housing material                       | PA                     |
| Seal material                          | NBR                    |
| Material lock                          | PA                     |
| Flammability rating according to UL 94 | V0 (Polyamide housing) |

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Dimensional drawing

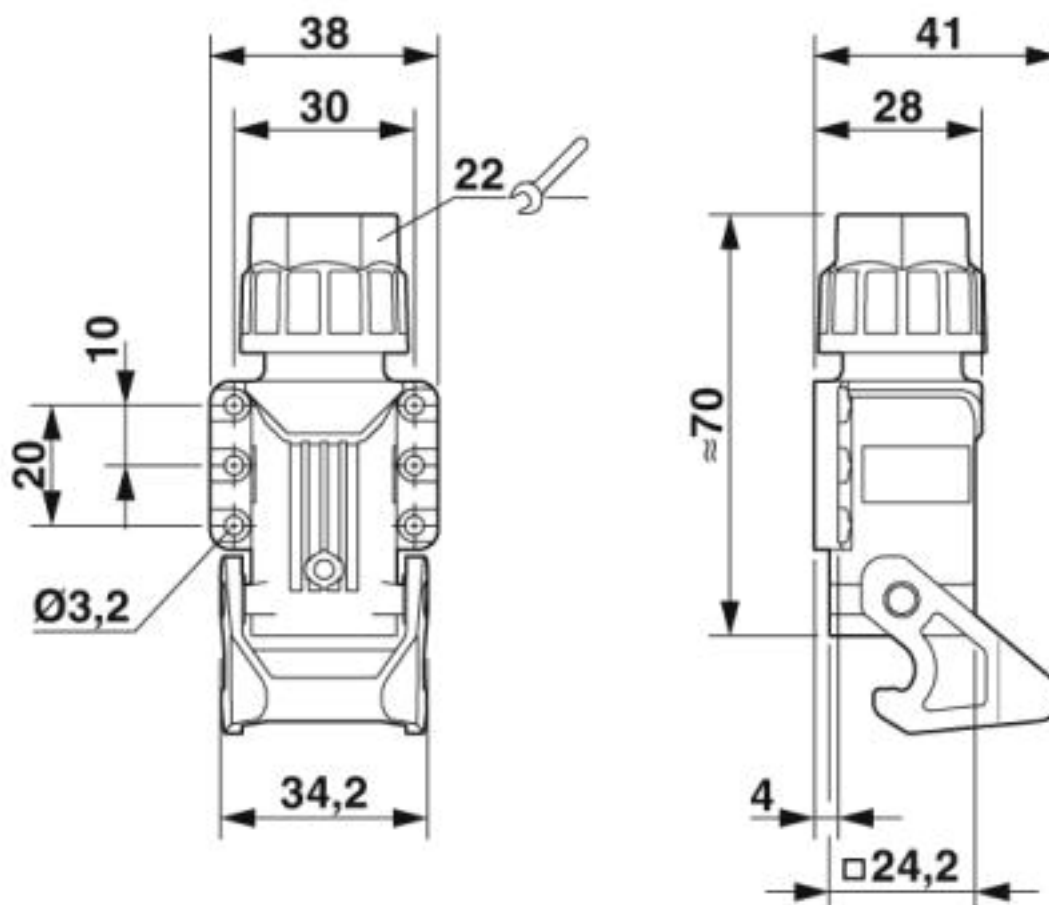

Dimensional drawing

## Housing - HC-STA-D07-SHCWS-1SGM20-PL-BK - 1419268

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440202 |
| eCl@ss 5.1    | 27261200 |
| eCl@ss 6.0    | 27261200 |
| eCl@ss 7.0    | 27440202 |
| eCl@ss 8.0    | 27440202 |
| eCl@ss 9.0    | 27440202 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC000437 |
| ETIM 6.0 | EC000437 |
| ETIM 7.0 | EC000437 |

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31261501 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |

### Approvals

#### Approvals

#### Approvals

#### EAC / DNV GL

#### Ex Approvals

#### Approval details

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

|        |                                                                                     |                                                                                   |            |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|
| DNV GL |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a> | TAE000037S |
|--------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|

### Accessories

#### Accessories

## Housing - HC-STA-D07-SHCWS-1SGM20-PL-BK - 1419268

### Accessories

#### Housing latches

Housing brackets - HC-D07-SL-PLBK - 1424440



Replacement latch for HC-D7 housing

---

#### Labeled device marker

Plastic label - US-EMLP (11X9) CUS - 0830073



Plastic label, can be ordered: By card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 11 x 9 mm, Number of individual labels: 135

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>