

## Housing - HC-B 10-TFL-N-O1M20G - 1460070

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing, for single locking latch, height: 56 mm, with gland, 1 x M20, straight cable outlet

RoHS

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 10 pc                                                                                                   |
| GTIN         | <br>4 046356 793322 |
| GTIN         | 4046356793322                                                                                           |

### Technical data

#### Dimensions

|        |       |
|--------|-------|
| Height | 56 mm |
| Width  | 43 mm |
| Length | 73 mm |

#### Ambient conditions

|                                      |                   |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65              |
| Ambient temperature (operation)      | -40 °C ... 125 °C |

#### General

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Note                         | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Size                         | B10                                              |
| Housing type                 | Sleeve housing                                   |
| Locking type                 | for single locking latch                         |
| No. of cable outlets         | 1                                                |
| Cable outlet                 | straight                                         |
| Screw connection             | none                                             |
| Type of the screw connection | 1x M20                                           |
| Housing material             | Aluminum die-cast                                |
| Housing surface material     | Powder-coated, gray                              |

# Housing - HC-B 10-TFL-N-O1M20G - 1460070

## Technical data

### General


|                       |                                     |
|-----------------------|-------------------------------------|
| Assembly instructions | For half and full screw connections |
|-----------------------|-------------------------------------|

### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Dimensional drawing

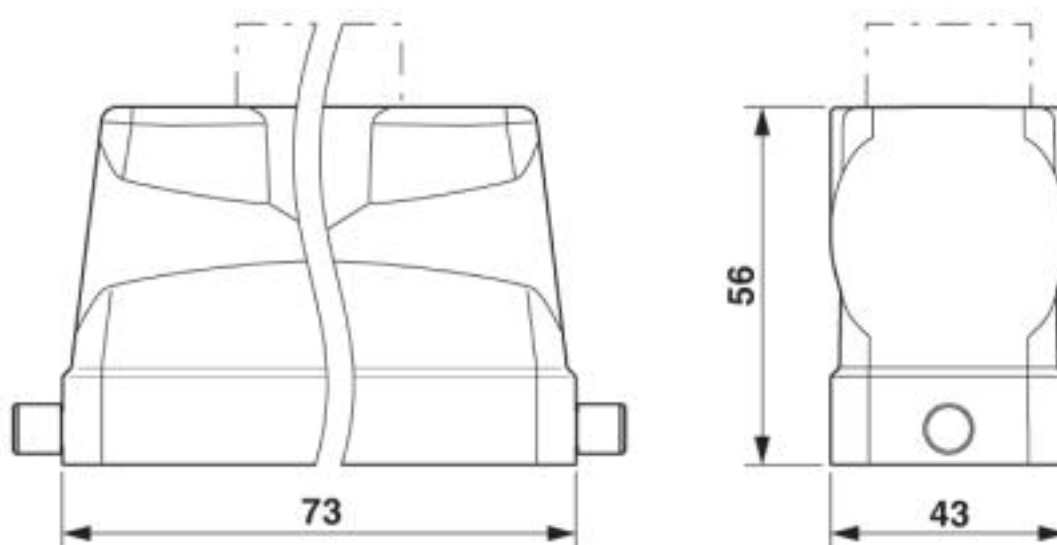

Dimensional drawing

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440202 |
| eCl@ss 4.0    | 27140800 |
| eCl@ss 4.1    | 27140800 |
| eCl@ss 5.0    | 27143400 |
| eCl@ss 5.1    | 27261200 |
| eCl@ss 6.0    | 27261200 |
| eCl@ss 7.0    | 27440202 |
| eCl@ss 8.0    | 27440202 |
| eCl@ss 9.0    | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |

## Housing - HC-B 10-TFL-N-O1M20G - 1460070

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC000437 |
| ETIM 6.0 | EC000437 |
| ETIM 7.0 | EC000437 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261501 |
| UNSPSC 18.0   | 31261501 |
| UNSPSC 19.0   | 31261501 |
| UNSPSC 20.0   | 31261501 |
| UNSPSC 21.0   | 31261501 |

### Approvals

#### Approvals

Approvals

EAC / EAC

Ex Approvals

#### Approval details

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

### Accessories

Accessories

Extension adapter

## Housing - HC-B 10-TFL-N-O1M20G - 1460070

### Accessories

Extension adapter - ENLAR-M-KV-M20/M25 - 1647666



Step-up adapter, M20 to M25, including O-ring

---

### Full screw connection

Cable gland - G-INS-M20-S68N-PNES-GY - 1411125



Cable gland, cable gland material: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-gray RAL 7001

---

Cable gland - G-INS-M20-S68N-PNES-BK - 1411133



Cable gland, cable gland material: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: jet black RAL 9005

---

Cable gland - G-INS-M20-S68N-NNES-S - 1411163



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

---

Cable gland - HC-M-KV-M20(11-16) - 1645998



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20

## Housing - HC-B 10-TFL-N-O1M20G - 1460070

### Accessories

Cable gland - G-INSEC-M20-S68N-NCRS-S - 1411189



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 9 mm ... 13 mm, shielding: yes, connecting thread: M20 x 1.5, color: silver, with O-ring

---

Cable gland - HC-M-KV-Z-M20 - 1646146



Metal screw connection with strain relief clamp, thread length: 6 mm, cable sealing area: 7.5 - 15 mm, clamping area: 11 - 17 mm, SW 24, screw connection: M20

---

Cable gland - HC-M-KV-T-M20 - 1646188



Metal screw connection with cable bend protection and strain relief, thread length: 6 mm, cable sealing area: 7.5 - 15 mm, clamping area: 10 - 16 mm, SW 24, screw connection: M20

---

### Plug for cable screw gland

Screw plug - HC-M-BS-M20 - 1645846



Screw plug, cable gland material: Nickel-plated brass, connecting thread: M20 x 1.5, color: silver

---

### Reducing adapter

Reducing adapter - REDUC-M-KV-M20/M16 - 1647611



Reducing adapter, material: Brass, nickel-plated, connecting thread: M20 x 1.5, color: silver, with O-ring

---

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>