

## Valve connectors - SACC-V-3CON-PG9/BI - 1527993

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Valve connectors, Universal, 3-position, Valve connector BI (11 mm), Screw connection, cable gland Pg9, external cable diameter 6 mm ... 8 mm

**RoHS**

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 981013
GTIN	4017918981013

### Technical data

#### Dimensions

External diameter	6 mm ... 8 mm
-------------------	---------------

#### Ambient conditions

Ambient temperature (operation)	-30 °C ... 100 °C (connector)
Degree of protection	IP65

#### General

Rated current at 40°C	10 A
Rated voltage	240 V
Number of positions	3
Insulation resistance	≥ 100 MΩ
Signal type/category	Universal
Status display	No
Protective circuit/component	unwired
Overvoltage category	II
Degree of pollution	3
Connection method	Screw connection
Conductor cross section	0.34 mm² ... 1.5 mm²
Conductor cross section AWG	22 ... 16

## Valve connectors - SACC-V-3CON-PG9/BI - 1527993

### Technical data

#### General

Insertion/withdrawal cycles	50 (Valve connector)
-----------------------------	----------------------

#### Material

Flammability rating according to UL 94	HB
Valve plug contact material	CuSn
Valve plug contact surface material	Ni
Valve plug contact insert material	PA6
Material housing valve plug	PA6
Sealing material	NBR

#### Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	HB

#### Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

Dimensional drawing

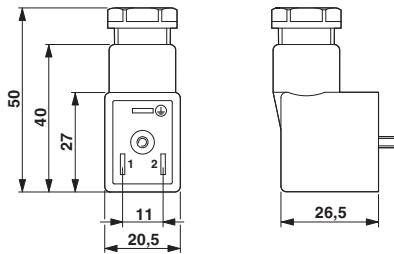

Circuit diagram

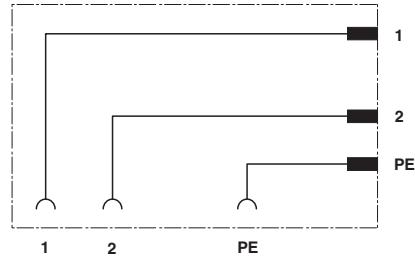

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

#### Approval details

## Valve connectors - SACC-V-3CON-PG9/BI - 1527993

### Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	File E 118976
Nominal voltage UN		250 V	
Nominal current IN		10 A	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	File E 118976
Nominal voltage UN		250 V	
Nominal current IN		10 A	

EAC		RU C- DE.AI30.B.01102
-----	------------------------------------------------------------------------------------	--------------------------

cULus Recognized	
------------------	-------------------------------------------------------------------------------------

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>