

SAC-4P-M12T/2XM12 CCL

Order No.: 1559783

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1559783>Bus system T connector, 4-pos., CC-Link, M12 socket on M12 socket
and M12 plug**CC-Link****Commercial data**

GTIN (EAN)	 4 046356 322164
sales group	D116
Pack	5 pcs.
Customs tariff	85444290
Catalog page information	Page 406 (PC-2011)

Product notesWEEE/RoHS-compliant since:
10/10/2007

[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.


Technical data**General data**

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	4
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-25 °C ... 90 °C
General characteristics	
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR
Status display	No


Diagrams/Drawings

Dimensioned drawing

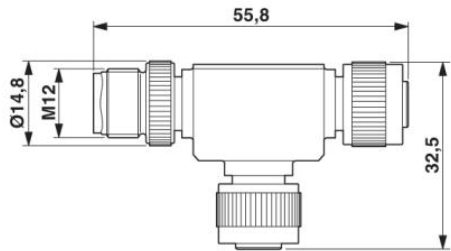


M12 T-distributor


Circuit diagram

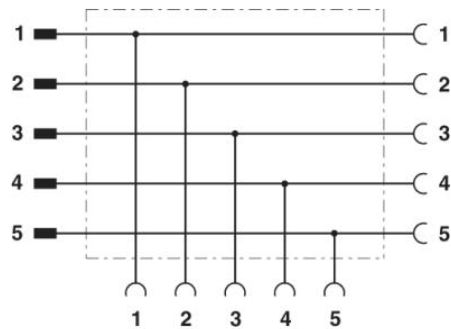

Schematic diagram

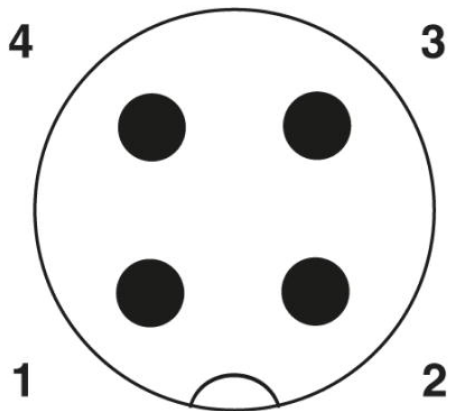

Pin assignment M12 plug, 4-pos., A-coded, view plug side

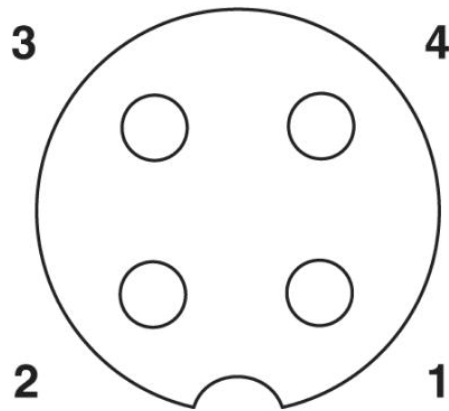

Pin assignment M12 socket, 4-pos., A-coded, view female side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2012 Phoenix Contact
Technical modifications reserved;