

## Sleeve housing for coupler connector - TU-00000009UDU - 1605888


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing for coupler connector, straight, Bayonet locking, M23, shielded: yes, cable diameter range: 2 mm ... 14.5 mm

RoHS

### Key Commercial Data

Packing unit	10 pc
GTIN	 4 046356 255486
GTIN	4046356255486

### Technical data

#### General

Note	Order information: Order contact inserts separately
Type of locking	Bayonet locking
Contact connection method	Crimp connection
Type of contacts	Socket
Conductor entry	2 mm ... 14.5 mm
Pg housing screw connection	none

#### Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

#### Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

#### Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------



# Sleeve housing for coupler connector - TU-00000009UDU - 1605888

## Technical data

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

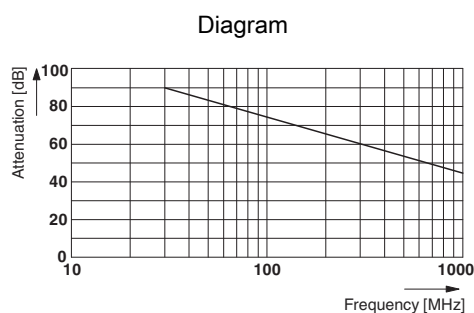

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC	<b>EAC</b>	B.01742
-----	------------	---------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>