


**VC-MP-T3-R**

Order No.: 1855555

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1855555>

Metal sleeve housing, powder-coating, locking screws with knurled head, type 3, cable screw connection Pg21

**Commercial data**

GTIN (EAN)	 4 017918 161538
sales group	D201
Pack	5 pcs.
Customs tariff	85389099
Catalog page information	Page 369 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
12/01/2005




<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General characteristics**

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Design	VC2
Degree of protection	IP54
Inflammability class acc. to UL 94	V0
Type of the screw connection	6 x 24 mm
Pg screw connection	None
Height	65 mm
Cable exit	Straight
Housing material	PA
Seal material	EPDM
Ambient temperature (operation)	-40 °C ... 80 °C

**Diagrams/Drawings**

## Dimensioned drawing

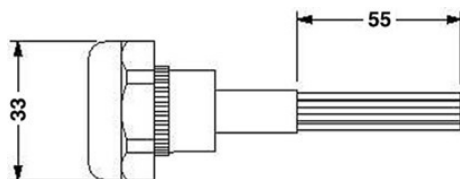

VC-MP-T3-R Order No.: 1855555

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1855555>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;