

**HC-B 6-TFL-70/O1STM25S-EMV**

Order No.: 1642292

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642292>

HEAVYCON sleeve housing B6, for single locking latch, height 70 mm,  
with thread M20, lateral cable outlet, EMC version

**Commercial data**

|                          |                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | <br>4 046356 028394 |
| sales group              | D002                                                                                                   |
| Pack                     | 10 pcs.                                                                                                |
| Customs tariff           | 85389099                                                                                               |
| Catalog page information | Page 586 (PC-2011)                                                                                     |

**Product notes**

WEEE/RoHS-compliant since:  
12/01/2005



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.


## Technical data

### General data


|                                 |                                          |
|---------------------------------|------------------------------------------|
| Note                            | For contact inserts HC-B6, BB10, DD24, M |
| Design                          | B6                                       |
| Height                          | 70 mm                                    |
| Width                           | 43 mm                                    |
| Length                          | 60 mm                                    |
| Housing type                    | EMC housings                             |
| Locking type                    | for single locking latch                 |
| No. of cable exits              | 1                                        |
| Cable exit                      | Lateral                                  |
| Pg screw connection             | None                                     |
| Type of the screw connection    | 1x M25                                   |
| Degree of protection            | IP65                                     |
| Ambient temperature (operation) | -40 °C ... 100 °C                        |
| Housing material                | Aluminum, die-cast                       |
| Housing surface material        | EMC coating, silver                      |

## Diagrams/Drawings

### Diagram

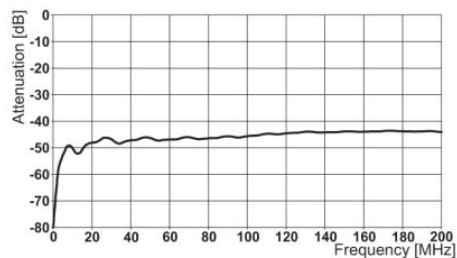

### Dimensioned drawing

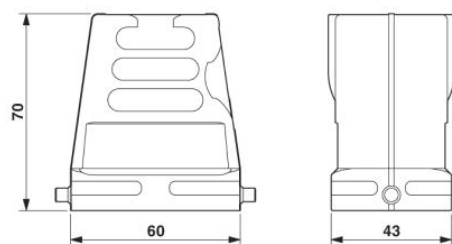

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;