

HC-WRV-M40


Order No.: 1644850

The illustration shows the version HC-WRV-PG 21

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644850>

Corrugated tube screw connection, for corrugated tubes, to lead individual conductors and wires with IP65 protection into the housings of the HEAVYCON industrial connectors, M40

Commercial data

GTIN (EAN)	
sales group	D096
Pack	10 pcs.
Customs tariff	39174000
Catalog page information	Page 629 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
08/19/2004



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data

General data

Cable gland material	PA
Inflammability class acc. to UL 94	HB
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 110 °C

Diagrams/Drawings

Dimensioned drawing

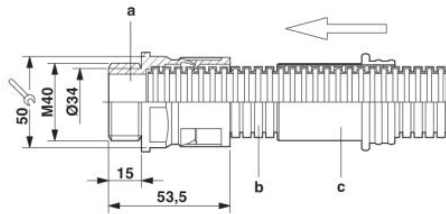

Assembly instructions for PG 16 corrugated pipe

a = Corrugated screw connection

b = Corrugated pipe

c = N/C contact

Assembly instructions:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The darker outer seal (not shown in the mounting diagram) is pulled inside out over the corrugated tube screw connection. The corrugated pipe is then inserted as far as possible into the corrugated tube screw connection until it audibly clicks into place. To open the screw connection, the yellow corrugated pipe N/C contact is firmly inserted between the locking clip and corrugated pipe, which is then removed.

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;