

VS-09-GC-ST/ST

Order No.: 1652651

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652651>

D-SUB contact insert, shell size 1, with nine signal contacts, contact type pin, gender changer, fixing with 4-40 UNC thread

Commercial data

GTIN (EAN)	4017918952792
Note	Made-to-order
sales group	D501
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.0091 KG
Catalog page information	Page 321 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	9
Insertion/withdrawal cycles	≥ 200
Type of connection	Gender changer
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Diagrams/Drawings

Dimensioned drawing

Gender changer

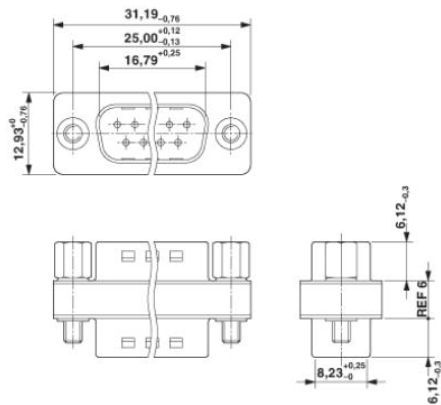

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;