



Extract from the online catalog

HC-D 25-TFL-72/O1PG16S

Order No.: 1672851

The illustration shows version HC-D 25-TFL-72/M 1 PG 16 S



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1672851>

Sleeve housing, for single locking latch, height 72 mm, without screw connection, 1x Pg16, lateral cable entry

Commercial data

EAN	4017918145385
Note	Made-to-order
sales group	D011
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.21374 KG

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

HC-D 25-TFL-72/O1PG16S Order No.: 1672851
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1672851>

Technical data

General data

Note	For contact inserts HC-D25, A16
Design	D25
Height	72 mm
Width	36 mm
Length	79.5 mm
Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Lateral
Type of the screw connection	1x Pg16
Pg screw connection	None
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

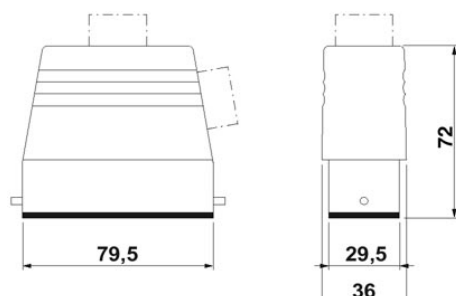

HC-D 25-TFL-72/O1PG16S Order No.: 1672851
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1672851>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com