

HC-B 16-TFQ-76/O1PG21G


Order No.: 1673931

The illustration shows a sleeve housing in the versions for double locking latch and single locking latch and with double locking latch



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1673931>

Sleeve housing, for double locking latch, height: 76 mm, with supports, 1 x Pg21, straight cable outlet

| Commercial data | |
|-----------------|--|
| GTIN (EAN) |  4 017918 152093 |
| Note | Made-to-order |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|--|
| Note | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design | B16 |
| Height | 76 mm |
| Width | 43 mm |
| Length | 94 mm |
| Housing type | Sleeve housings |
| Locking type | For double locking latch |

| | |
|---------------------------------|---------------------|
| Cable exit | Straight |
| Pg screw connection | None |
| Type of the screw connection | 1x Pg21 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

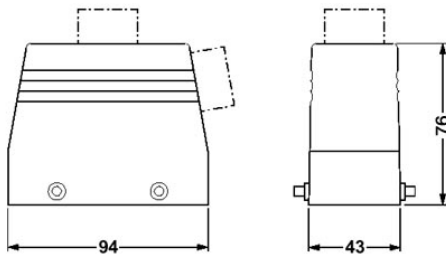

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;