




Extract from the online catalog

MKDS 5/ 2-9,5 BK

Order No.: 1714926

The illustration shows a combination as a 2-pos. version, in pitch 6.35, 7.62 and 9.5 mm in green

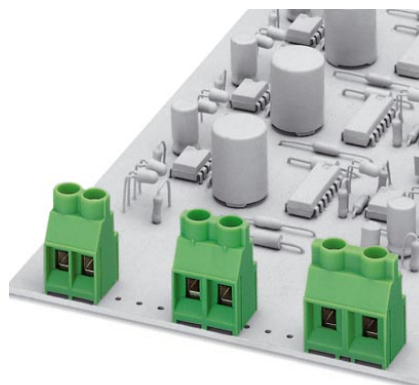

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1714926>

PC terminal block, Nominal current: 32 A, Nom. voltage: 690 V, Pitch: 9.52 mm, Number of positions: 2, Type of connection: Screw connection, Assembly: Soldering, Conductor/PCB connection direction: 0 °, Color: black, The article can be aligned to create different nos. of positions!

Commercial data

EAN	4017918229771
Note	Made-to-order
sales group	E510
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.00647 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals



Certification

CCA, CSA, CUL, SEV, UL

MKDS 5/ 2-9,5 BK Order No.: 1714926
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1714926>

CSA

Nominal voltage U_N	300 V
Nominal current I_N	30 A
AWG/kcmil	28-10

CUL

Nominal voltage U_N	600 V
Nominal current I_N	5 A
AWG/kcmil	30-10

UL

Nominal voltage U_N	600 V
Nominal current I_N	5 A
AWG/kcmil	30-10

MKDS 5/ 2-9,5 BK Order No.: 1714926
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1714926>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com