

FK-MPT 0,5/ 4-ICA-3,5

Order No.: 1930344

The figure shows a 9-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1930344>

Header, Nominal current: 3 A, Rated voltage (III/2): 250 V, Pitch: 3.5 mm, Color: black, Metal surface: Sn, Assembly: Soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.

Commercial data

GTIN (EAN)	4017918823160
Note	Made-to-order
sales group	E431
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.001092 KG
Catalog page information	Page 452 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	8.8 mm
Pitch	3.5 mm
Dimension a	10.5 mm

Number of positions	4
Pin dimensions	0,3 x 0,9 mm
Hole diameter	1 mm

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	3 A
Nominal voltage U_N	160 V
Maximum load current	3 A
Insulating material	PA
Inflammability class acc. to UL 94	V0
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	4 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	4 A

Certificates / Approvals



Certification

CCA, CUL, GOST, SEV, UL

CUL


Nominal voltage U_N	300 V
Nominal current I_N	4 A

UL


Nominal voltage U_N	300 V
Nominal current I_N	4 A

Diagrams/Drawings

Drilling plan/solder pad geometry

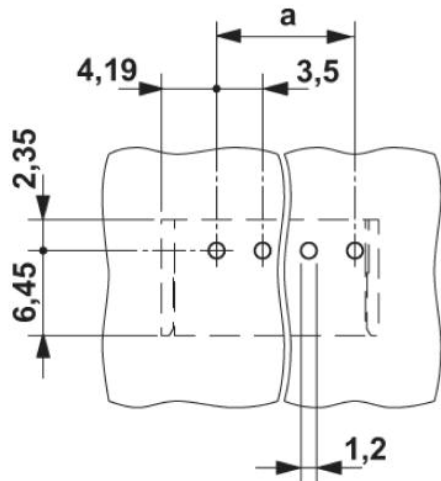

Dimensioned drawing

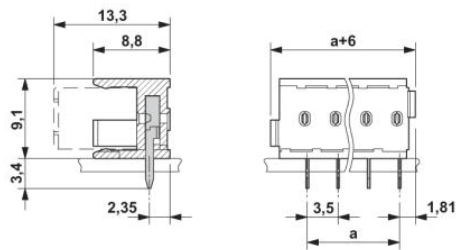

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;