


TRKSD 4-FS OG

Order No.: 2702322

The illustration shows versions TRKS 4-FS and TRKSD 4-FS in orange

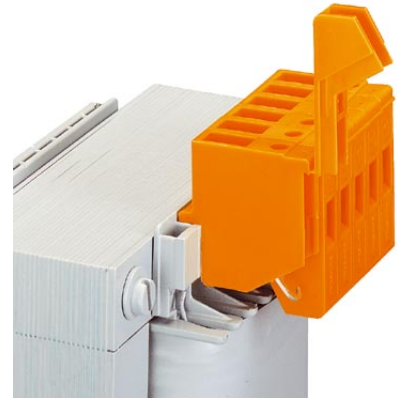

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702322>

Transformer terminal block, Connection method: Screw/Slip-on
connection, Length: 34.7 mm, Width: 15 mm, Height: 28.3 mm,
Color: orange, Mounting type: DIN rail, Coil snap-in device

Commercial data

GTIN (EAN)	 4 017918 060695
sales group	A401
Pack	50 pcs.
Customs tariff	85369010
Catalog page information	Page 317 (CL-2002)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General

Note	For transformers on ships, saltwater-proof DIN rails must be used according to the regulations of Germanic Lloyd. This requirement is fulfilled by all rail designs.
Number of connections	4

Color	orange
Insulating material	PA
Inflammability class acc. to UL 94	V2

Dimensions

Width	15 mm
Length	34.7 mm
Height	28.3 mm

Technical data

Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Connection in acc. with standard	IEC / EN
Nominal current I_N	25 A
Nominal voltage U_N	(voltage data only possible in conjunction with transformer)

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	6 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²

2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²
Connection method	Screw/Slip-on connection
Stripping length	8 mm
Internal cylindrical gage	A4
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm
Slip-on connection	6.3/2.8 x 0.8 mm

Certificates / Approvals



Certification

CSA, CUL, GOST, UL, VDE-PZI

Accessories


Item	Designation	Description
------	-------------	-------------

Assembly

3000308	ATP-TRKS	Partition plate, Width: 2.2 mm, Color: gray
---------	----------	---

Diagrams/Drawings

Dimensioned drawing

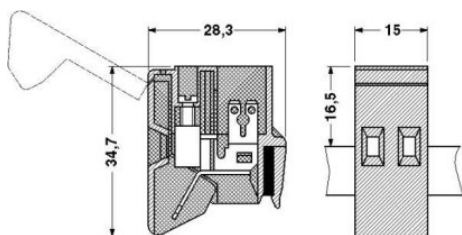

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;