

IB IL 120 PWR IN-PAC

Order No.: 2861454



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861454>

Inline power terminal block, complete with accessories (connector and labeling field), without fuse, 120 V AC



Commercial data

GTIN (EAN)	 4 017918 907402
Note	Made-to-order
sales group	K417
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 173 (AX-2011)

Product notes

WEEE/RoHS-compliant since:
07/19/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interfaces

Connection method	8-pos. Inline power connector
Interface	Supply voltage

Power supply

I/O voltage	120 V AC
-------------	----------

Peripherals voltage range	108 V AC ... 135 V AC (including all tolerances, including ripple)
Max. current consumption	8 A

General data

Type of protection	Surge protection
Weight	80 g
Width	36.6 mm
Height	119.8 mm
Depth	71.5 mm

Inline potential routing

Main circuit supply U_M	120 V AC (nominal value)
Power supply at U_M	8 A (nominal value)

Certificates / Approvals



Certification CUL, GOST, UL

Accessories

Item	Designation	Description
------	-------------	-------------


Marking

0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm

Plug/Adapter

2740180	IB IL AC-PWR-IN-PLSET	Connector set, for Inline input terminal blocks with AC voltage
---------	-----------------------	---

Connection diagram

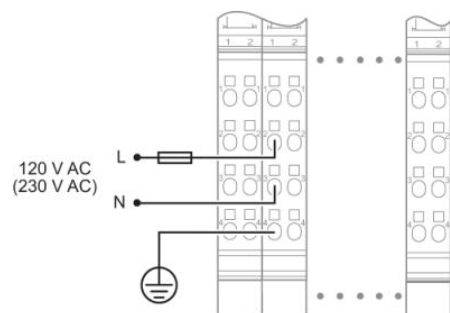

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;