

## Surge protection device - TTC-6-2-24DC-PT - 2906806

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection for resistance-dependent measuring signals.

### Your advantages

- ✓ Space-saving installation due to the narrow overall width of 6.2 mm
- ✓ Quick and tool-free installation of surge protective devices, thanks to Push-in connection technology



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 055626 135700 |
| GTIN         | 4055626135700                                                                                           |

### Technical data

#### Dimensions

|        |                                 |
|--------|---------------------------------|
| Height | 105.8 mm                        |
| Width  | 6.2 mm +0.1 mm                  |
| Depth  | 69.5 mm (incl. DIN rail 7.5 mm) |

#### Ambient conditions

|                                         |                                        |
|-----------------------------------------|----------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 85 °C                       |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                       |
| Permissible humidity (operation)        | 5 % ... 95 %                           |
| Altitude                                | ≤ 4000 m (amsl (above mean sea level)) |
| Degree of protection                    | IP20                                   |

#### General

|                                        |     |
|----------------------------------------|-----|
| Housing material                       | PBT |
| Flammability rating according to UL 94 | V-0 |

# Surge protection device - TTC-6-2-24DC-PT - 2906806

## Technical data

### General

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Color               | traffic grey A RAL 7042                                                            |
| Mounting type       | DIN rail: TH 35 - 7.5 mm                                                           |
| Type                | DIN rail module, one-piece                                                         |
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |

### Protective circuit

|                                                                 |                                             |
|-----------------------------------------------------------------|---------------------------------------------|
| IEC test classification                                         | C1                                          |
|                                                                 | C2                                          |
|                                                                 | C3                                          |
|                                                                 | D1                                          |
| Nominal voltage $U_N$                                           | 24 V DC                                     |
| Maximum continuous voltage $U_C$                                | 30 V DC                                     |
|                                                                 | 21 V AC                                     |
| Rated current                                                   | 450 mA (80 °C)                              |
| Operating effective current $I_C$ at $U_C$                      | $\leq 5 \mu A$                              |
| Residual current $I_{PE}$                                       | $\leq 1 \mu A$                              |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-line)      | 0.5 kA                                      |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (line-earth)     | 5 kA                                        |
| Pulse discharge current $I_{imp}$ (10/350) $\mu s$ (line-earth) | 0.5 kA                                      |
| Total discharge current $I_{total}$ (8/20) $\mu s$              | 10 kA                                       |
| Voltage protection level $U_p$ (line-line)                      | $\leq 60 V$ (C1 - 1 kV/500 A)               |
|                                                                 | $\leq 45 V$ (C3 - 25 A)                     |
|                                                                 | $\leq 50 V$ (C3 - 100 A)                    |
| Voltage protection level $U_p$ (line-earth)                     | $\leq 650 V$ (C1 - 1 kV/500 A)              |
|                                                                 | $\leq 1.1 kV$ (C2 - 10 kV / 5 kA)           |
|                                                                 | $\leq 600 V$ (C3 - 25 A)                    |
|                                                                 | $\leq 700 V$ (C3 - 100 A)                   |
| Voltage protection level $U_p$ static (line-earth)              | $\leq 1.1 kV$ (C2 - 10 kV / 5 kA)           |
| Response time $t_A$ (line-line)                                 | $\leq 1 ns$                                 |
| Response time $t_A$ (line-earth)                                | $\leq 100 ns$                               |
| Input attenuation aE, sym.                                      | typ. 0.3 dB ( $\leq 300 kHz / 150 \Omega$ ) |
| Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system          | typ. 965 kHz                                |
| Capacity (line-earth)                                           | typ. 2.2 nF                                 |
| Resistance per path                                             | $\leq 100 m\Omega$                          |
| Max. required back-up fuse                                      | 500 mA (FF)                                 |
| Impulse durability (line-line)                                  | C1 - 1 kV / 500 A                           |
|                                                                 | C3 - 100 A                                  |
| Impulse durability (line-earth)                                 | C1 - 1 kV / 500 A                           |
|                                                                 | C2 - 10 kV / 5 kA                           |
|                                                                 | C3 - 100 A                                  |

## Surge protection device - TTC-6-2-24DC-PT - 2906806

### Technical data

#### Protective circuit

|                               |            |
|-------------------------------|------------|
|                               | D1 - 500 A |
| Pulse reset time (line-earth) | $\leq 1$ s |

#### Additional technical data

|                                                                        |            |
|------------------------------------------------------------------------|------------|
| Max. total discharge current $I_{\text{total max}} (8/20) \mu\text{s}$ | 20 kA (1x) |
|------------------------------------------------------------------------|------------|

#### Connection data

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Push-in connection                          |
| Stripping length                 | 8 mm                                        |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section AWG      | 24 ... 12                                   |

#### Standards and Regulations


|                          |                                                                    |
|--------------------------|--------------------------------------------------------------------|
| Standards/specifications | IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |
|                          | EN 61643-21 2001 + A1:2009 + A2:2013                               |

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


### Drawings

Diagram

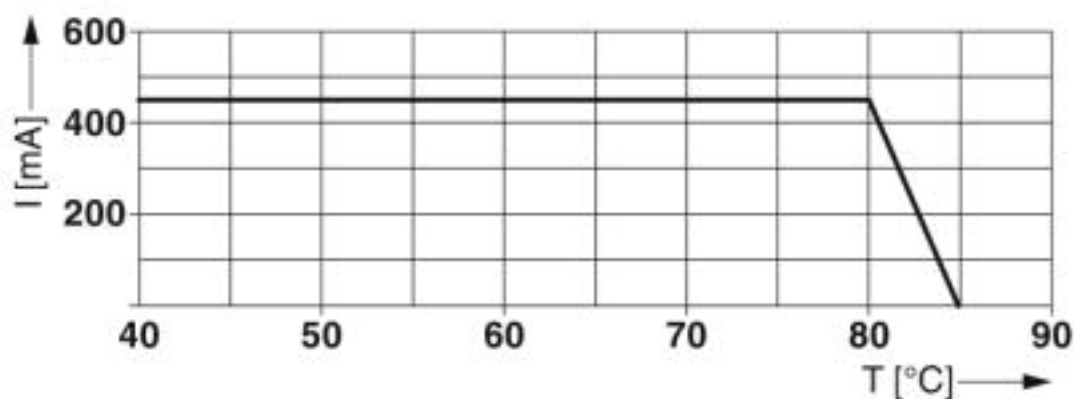


## Surge protection device - TTC-6-2-24DC-PT - 2906806


Dimensional drawing

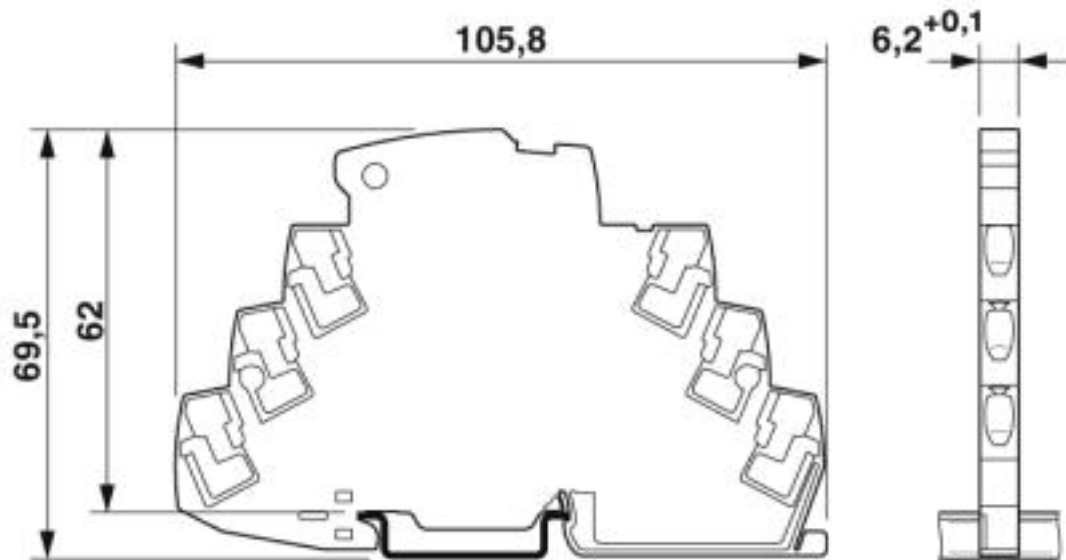

Pictogram

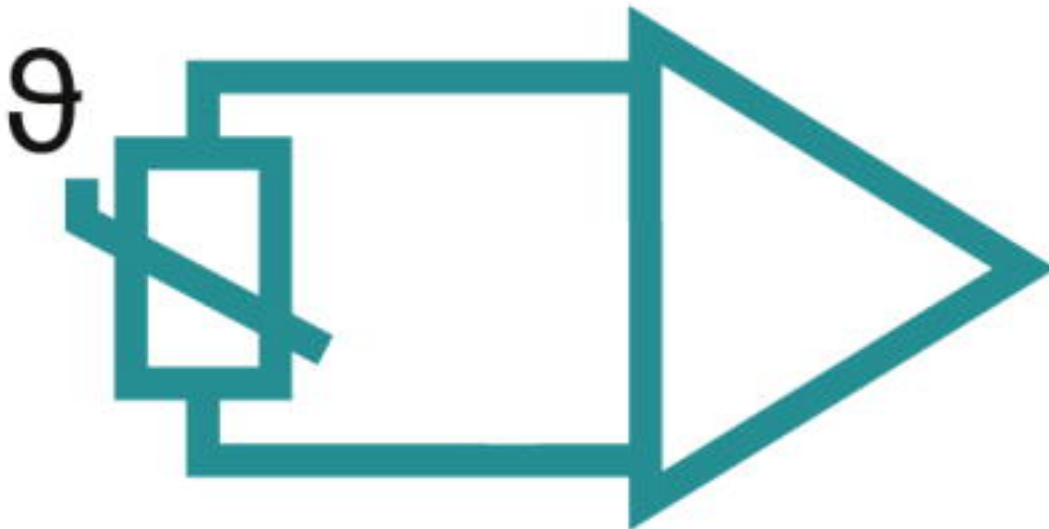

## Surge protection device - TTC-6-2-24DC-PT - 2906806

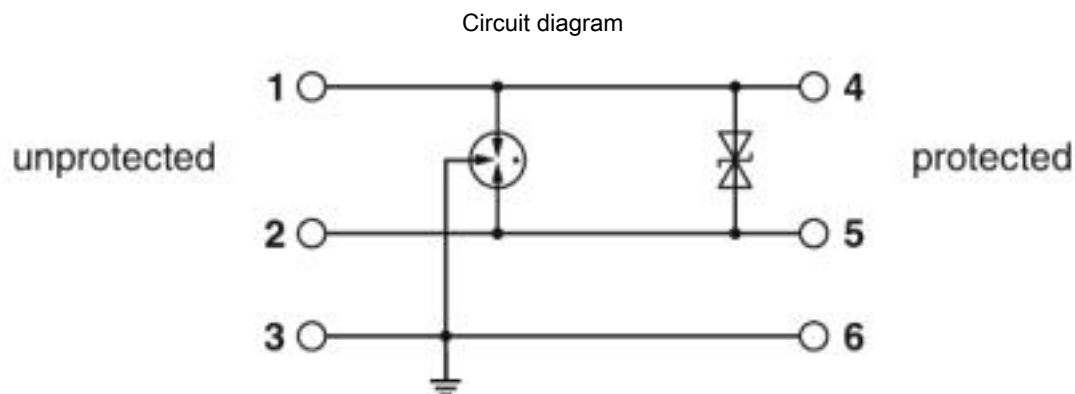

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27130807 |
| eCl@ss 4.0    | 27140201 |
| eCl@ss 4.1    | 27130801 |
| eCl@ss 5.0    | 27130801 |
| eCl@ss 5.1    | 27130801 |
| eCl@ss 6.0    | 27130800 |
| eCl@ss 7.0    | 27130807 |
| eCl@ss 8.0    | 27130807 |
| eCl@ss 9.0    | 27130807 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |
| ETIM 6.0 | EC000943 |
| ETIM 7.0 | EC000943 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |
| UNSPSC 18.0   | 39121620 |
| UNSPSC 19.0   | 39121620 |
| UNSPSC 20.0   | 39121620 |
| UNSPSC 21.0   | 39121620 |

## Surge protection device - TTC-6-2-24DC-PT - 2906806

### Approvals

#### Approvals

---

#### Approvals

DNV GL / CSA / UL Listed / CSAus / cCSAus

---

#### Ex Approvals

---

#### Approval details

|           |                                                                                     |                                                                                                                                                       |               |
|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| DNV GL    |    | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a>                                                                     | TAE000027G    |
| CSA       |   | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>               | 70136717      |
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 138168 |
| CSAus     |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>               | 70136717      |
| cCSAus    |  |                                                                                                                                                       |               |

### Accessories

#### Accessories

##### End block

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

## Surge protection device - TTC-6-2-24DC-PT - 2906806

### Accessories

#### Labeled terminal marker

Zack Marker strip, flat - ZBF 6 CUS - 0825027



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 6,QR:FORTL.ZAHLEN - 0808765



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

#### Marker pen

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

#### Terminal marking

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

#### Additional products

## Surge protection device - TTC-6-2-24DC-PT - 2906806

### Accessories

#### Shield connection - SSA 3-6 - 2839295



Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

---

#### Shield connection - SSA 5-10 - 2839512



Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>