

## Test terminal strip - RSCWE 6-3/7 - 3969923

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Test terminal strip, nom. voltage: 400 V AC/DC, connection method: Ring cable lug, number of connections: 14, number of positions: 7, width: 89.7 mm, height: 70.1 mm, color: gray, mounting type: Wall mounting


### Your advantages

- ✓ Cost-effective, thanks to the tailored, modular design and use of standardized CLIPLINE complete accessories
- ✓ Space saving, thanks to compact, modular test terminal strips
- ✓ The integrated, robust switch contact is designed for the most stringent demands, and the use of high-quality materials ensures the transmission of signal currents, even after multiple actuations
- ✓ Maximum safety with leading and automatic transformer short circuit



COMPLETE RoHS

### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 pc  |
| GTIN         | <br>4 055626 272634 |
| GTIN         | 4055626272634   |

### Technical data

#### General

|  |                   |
|--|-------------------|
| Number of positions                    | 7                 |
| Number of levels                       | 1                 |
| Number of connections                  | 14                |
| Potentials                             | 7                 |
| Nominal cross section                  | 6 mm <sup>2</sup> |
| Color                                  | gray              |
| Insulating material                    | PA                |
| Flammability rating according to UL 94 | V0                |
| Rated surge voltage                    | 4 kV              |
| Test surge voltage                     | 5 kV              |
| Overvoltage category                   | III               |
| Insulating material group              | I                 |

# Test terminal strip - RSCWE 6-3/7 - 3969923

## Technical data

### General

|   |  |
|---|--|
| Maximum power dissipation for nominal condition   | 1.31 W   |
| Maximum load current  | 30 A (with 10 mm <sup>2</sup> conductor cross section)                 |
| Nominal voltage U <sub>N</sub>  | 400 V AC/DC  |
| Open side panel   | No   |
| Terminal block mounting   | 0.8 Nm ... 1 Nm  |
| Ambient temperature (operation)   | -60 °C ... 85 °C   |
| Ambient temperature (storage/transport)   | -25 °C ... 55 °C (For a short time, not exceeding 24 h, -60 to +70 °C) |
| Permissible humidity (storage/transport)  | 30 % ... 70 %  |
| Ambient temperature (assembly)  | -5 °C ... 70 °C  |
| Ambient temperature (actuation)   | -5 °C ... 70 °C  |
| Shock protection test specification   | DIN EN 50274 (VDE 0660-514):2002-11                                    |
| Back of the hand protection   | guaranteed   |
| Result of surge voltage test  | Test passed  |
| Surge voltage test setpoint   | 4.8 kV   |
| Result of power-frequency withstand voltage test  | Test passed  |
| Power frequency withstand voltage setpoint  | 1.89 kV  |
| Result of the test for mechanical stability of terminal points (5 x conductor connection) | Test passed  |
| Result of tight fit on support  | Test passed  |
| Setpoint  | 5 N  |
| Result of voltage-drop test   | Test passed  |
| Requirements, voltage drop  | ≤ 4.8 mV   |
| Result of temperature-rise test   | Test passed  |
| Short circuit stability result  | Test passed  |
| Conductor cross section short circuit testing   | 4 mm <sup>2</sup>  |
| Short-time current  | 300 A  |
| Conductor cross section short circuit testing   | 4 mm <sup>2</sup>  |
| Short-time current  | 500 A  |
| Conductor cross section short circuit testing   | 4 mm <sup>2</sup>  |
| Short-time current  | 150 A  |
| Conductor cross section short circuit testing   | 4 mm <sup>2</sup>  |
| Short-time current  | 1250 A   |
| Result of thermal test  | Test passed  |
| Proof of thermal characteristics (needle flame) effective duration                        | 30 s   |
| Oscillation, broadband noise test result  | Test passed  |
| Test specification, oscillation, broadband noise  | DIN EN 50155 (VDE 0115-200):2008-03                                    |
| Test spectrum   | Service life test category 2, bogie-mounted                            |
| Test frequency  | f <sub>1</sub> = 5 Hz to f <sub>2</sub> = 250 Hz                       |
| ASD level   | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz                              |
| Acceleration  | 3.12 g   |
| Test duration per axis  | 5 h  |

# Test terminal strip - RSCWE 6-3/7 - 3969923

## Technical data

### General

|   |                                     |
|---|-------------------------------------|
| Test directions   | X-, Y- and Z-axis                   |
| Shock test result   | Test passed                         |
| Test specification, shock test  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Shock form  | Half-sine                           |
| Acceleration  | 30g                                 |
| Shock duration  | 18 ms                               |
| Number of shocks per direction  | 3                                   |
| Test directions   | X-, Y- and Z-axis (pos. and neg.)   |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C                              |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C                              |
| Static insulating material application in cold                          | -60 °C                              |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed                              |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed                              |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed                              |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 27,5 MJ/kg                          |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3                         |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3                         |

### Dimensions

|                 |               |
|-----------------|---------------|
| Width           | 89.7 mm       |
| Length          | 81 mm         |
| Height          | 70.1 mm       |
| Plate thickness | 1 mm ... 4 mm |
| Pitch           | 8.2 mm        |

### Connection data

|  |                     |
|--|---------------------|
| Connection                                       | 1 level             |
| Connection method                                | Ring cable lug      |
| Screw thread                                     | No 8 UNC            |
| Stripping length                                 | 12 mm               |
| Tightening torque, min                           | 1.5 Nm              |
| Tightening torque max                            | 1.8 Nm              |
| Connection in acc. with standard                 | IEC 60947-7-1       |
| Conductor cross section flexible min.            | 0.5 mm <sup>2</sup> |
| Conductor cross section flexible max.            | 10 mm <sup>2</sup>  |
| Min. AWG conductor cross section, flexible       | 24                  |
| Max. AWG conductor cross section, flexible       | 8                   |
| 2 conductors with same cross section, solid min. | 0.5 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max. | 6 mm <sup>2</sup>   |

# Test terminal strip - RSCWE 6-3/7 - 3969923

## Technical data

### Connection data

|   |                     |
|---|---------------------|
| 2 conductors with same cross section, stranded min. | 0.5 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded max. | 6 mm <sup>2</sup>   |
| Cable lug connection according to standard          | DIN 46234:1980-03   |
| Min. cross section for cable lug connection         | 0.5 mm <sup>2</sup> |
| Max. cross section for cable lug connection         | 10 mm <sup>2</sup>  |
| Hole diameter, min.                                 | 4.3 mm              |
| Cable lug width, max.                               | 8 mm                |
| Bolt diameter                                       | 4.1 mm              |
| Cable lug connection according to standard          | DIN 46237:1970-07   |
| Min. cross section for cable lug connection         | 0.5 mm <sup>2</sup> |
| Max. cross section for cable lug connection         | 10 mm <sup>2</sup>  |
| Hole diameter, min.                                 | 4.3 mm              |
| Cable lug width, max.                               | 8 mm                |
| Bolt diameter                                       | 4.1 mm              |
| Internal cylindrical gage                           | A5                  |

### Mounting

|   |               |
|---|---------------|
| Mounting type                                 | Wall mounting |
| Plate thickness                               | 1 mm ... 4 mm |
| Min. tightening torque of the mounting screw: | 0.8 Nm        |
| Max. tightening torque of the mounting screw: | 1 Nm          |

### Standards and Regulations

|  |               |
|--|---------------|
| Connection in acc. with standard       | IEC 60947-7-1 |
| Flammability rating according to UL 94 | V0            |


### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings


## Test terminal strip - RSCWE 6-3/7 - 3969923

Circuit diagram

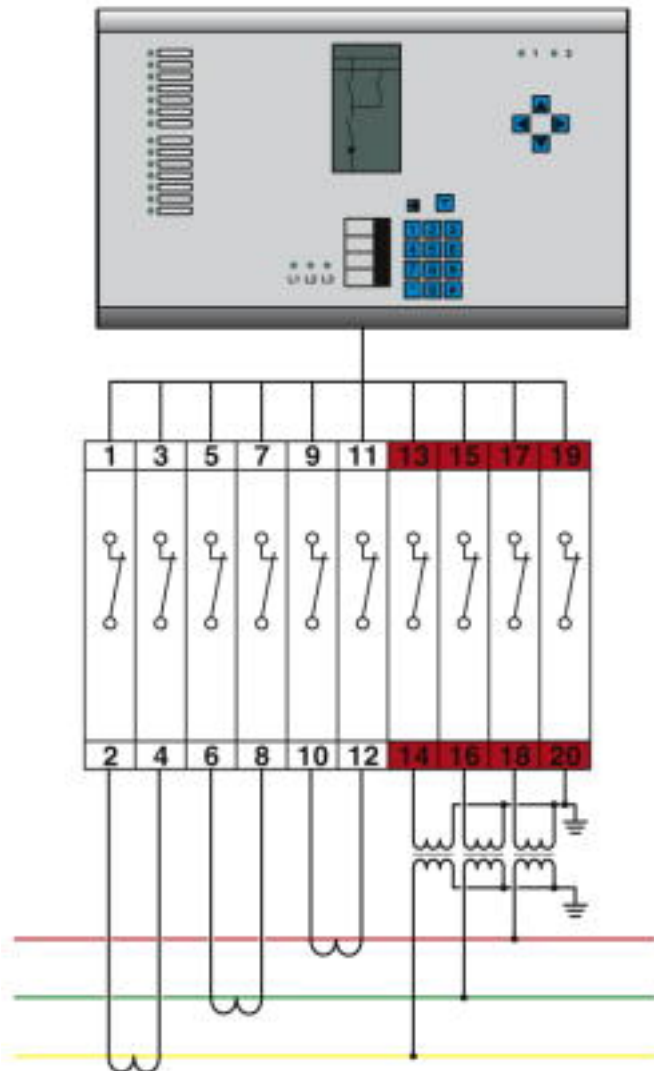


## Test terminal strip - RSCWE 6-3/7 - 3969923

Dimensional drawing

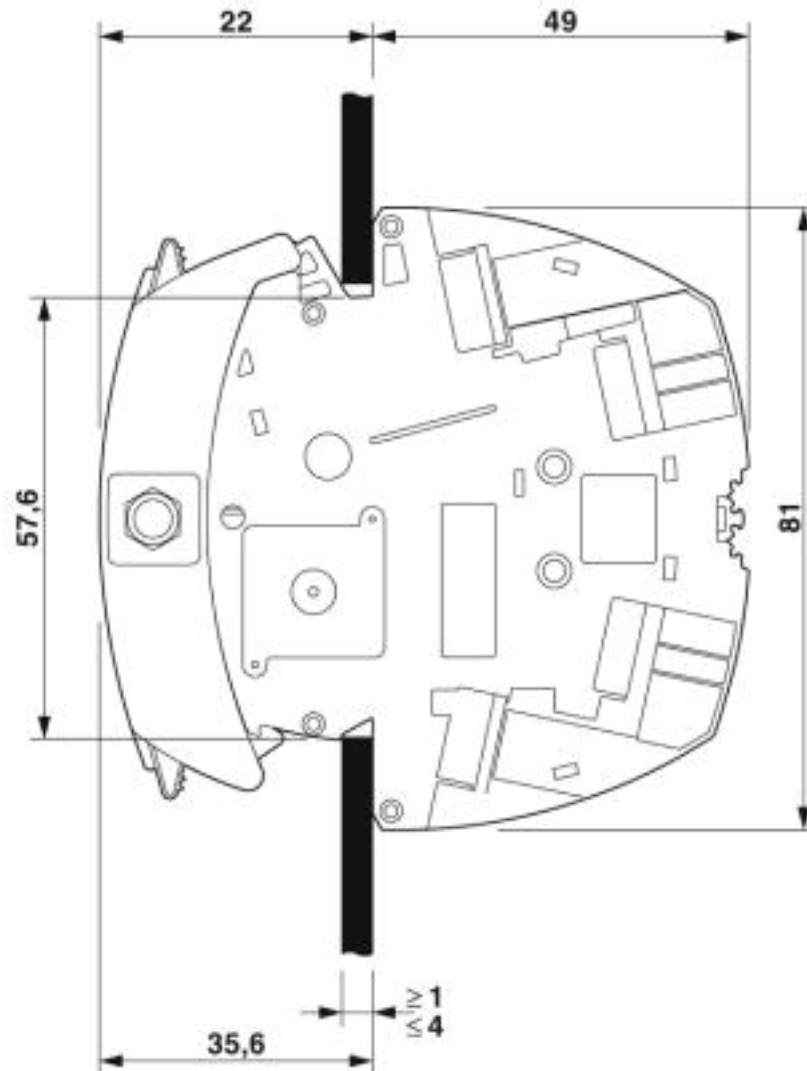

## Test terminal strip - RSCWE 6-3/7 - 3969923

Dimensional drawing

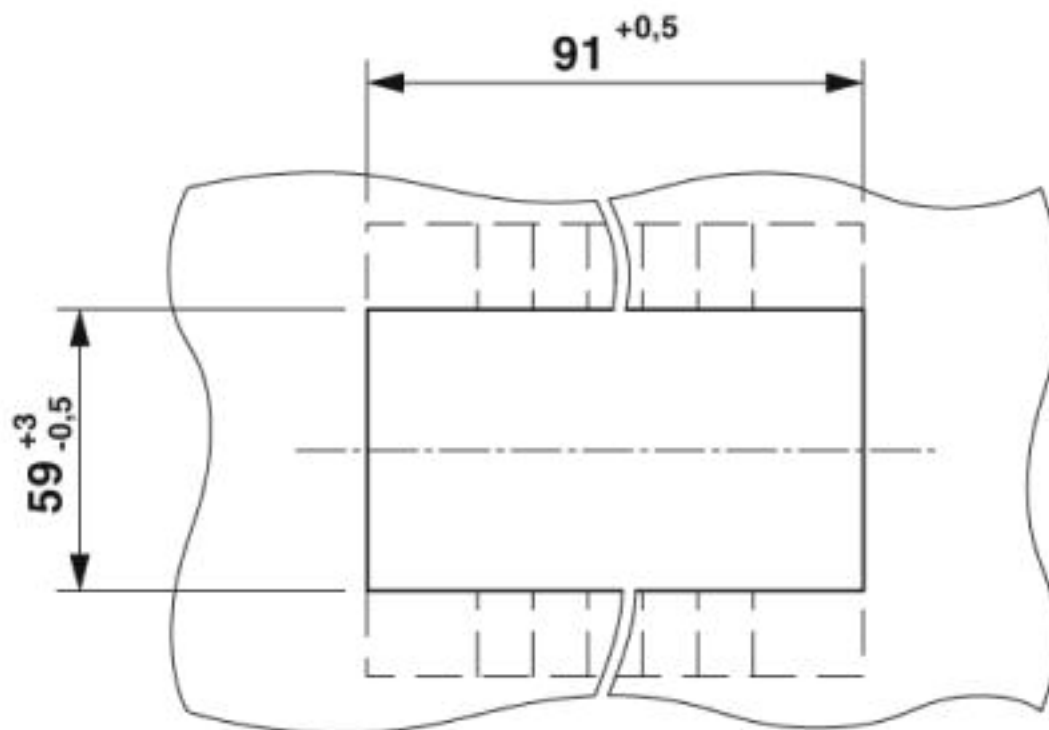

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27141126 |
| eCl@ss 4.0    | 27141100 |
| eCl@ss 4.1    | 27141100 |
| eCl@ss 5.0    | 27141100 |
| eCl@ss 5.1    | 27141100 |
| eCl@ss 6.0    | 27141100 |
| eCl@ss 7.0    | 27141126 |
| eCl@ss 8.0    | 27141126 |
| eCl@ss 9.0    | 27141126 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC000902 |
| ETIM 6.0 | EC000902 |
| ETIM 7.0 | EC000902 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Classifications

#### UNSPSC

|              |          |
|--------------|----------|
| UNSPSC 11    | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2  | 39121410 |
| UNSPSC 18.0  | 39121410 |
| UNSPSC 19.0  | 39121410 |
| UNSPSC 20.0  | 39121410 |
| UNSPSC 21.0  | 39121410 |

### Approvals


#### Approvals


#### Approvals


CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

#### Approval details

|                    |   |   |       |
|--------------------|---|---|-------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                    | B   | C   |       |
| Nominal voltage UN | 600 V   | 600 V   |       |
| Nominal current IN | 31 A  | 31 A  |       |
| mm²/AWG/kcmil      | 20-8  | 20-8  |       |

|                    |   |   |              |
|--------------------|---|---|--------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                    | B   | C   |              |
| Nominal voltage UN | 600 V   | 600 V   |              |
| Nominal current IN | 31 A  | 31 A  |              |
| mm²/AWG/kcmil      | 20-8  | 20-8  |              |

|                    |   |   |              |
|--------------------|---|---|--------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                    | B   | C   |              |
| Nominal voltage UN | 600 V   | 600 V   |              |




## Test terminal strip - RSCWE 6-3/7 - 3969923

### Approvals

|                                | B    | C    |
|--------------------------------|------|------|
| Nominal current I <sub>N</sub> | 31 A | 31 A |
| mm <sup>2</sup> /AWG/kcmil     | 20-8 | 20-8 |

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.BL08.B.00682 |
|-----|---|--------------------------|

|                  |   |
|------------------|---|
| cULus Recognized |  |
|------------------|---|

### Accessories

#### Accessories

##### Blind plug

Dummy plug - FBP-2/7 - 3069878



Dummy plug, color: gray

#### Connector

Ring cable lug - C-RCI 2,5/M3,5 - 3240022



Ring cable lug, blue, 1.5 ... 2.5 mm<sup>2</sup>, M3.5

Ring cable lug - C-RCI 1,5/M3,5 - 3240017



Ring cable lug, red, 0.5 ... 1.5 mm<sup>2</sup>, M3.5

#### Cover profile

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Cover profile - FBP-3/7 TR - 3069945



Cover profile, can optionally be sealed, length: 89.3 mm, width: 74.1 mm, height: 32 mm, color: transparent

---

Cover profile - AP RSC-T - 3059139



Cover profile, for covering terminal strips, directly snapped onto RBO... and RSC... test disconnect terminal blocks.  
Length supplied: 1 m

---

### Cover profile carrier

Cover profile carrier - APH-RSCWE 6-3 CARRIER - 3069058



Cover profile carrier, for accommodating the cover profile, length: 81 mm, width: 8.15 mm, height: 73.1 mm, number of positions: 1, color: gray

---

Cover profile carrier - APH-RSCWE 6-3 CARRIER ? - 3069059



Cover profile carrier, for accommodating the cover profile, length: 81 mm, width: 8.15 mm, height: 73.1 mm, number of positions: 1, color: gray

---

### End cover

Spacer plate - DP-RSCWE 6-3 - 3069314



Spacer plate, length: 80.9 mm, width: 8.2 mm, height: 70.8 mm, number of positions: 1, color: gray

---

### Jumper

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Plug-in bridge - FBS 2-8 - 3030284



Plug-in bridge, pitch: 8.2 mm, width: 14.7 mm, number of positions: 2, color: red

---

Plug-in bridge - FBS 3-8 - 3030297



Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: red

---

Plug-in bridge - FBS 4-8 - 3030307



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, color: red

---

Plug-in bridge - FBS 5-8 - 3030310



Plug-in bridge, pitch: 8.2 mm, width: 39.3 mm, number of positions: 5, color: red

---

Plug-in bridge - FBS 6-8 - 3032470



Plug-in bridge, pitch: 8.2 mm, width: 47.5 mm, number of positions: 6, color: red

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Plug-in bridge - FBS 1/3-8 - 3032363



Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, pin assignment: 1,3, color: red

---

Plug-in bridge - FBS 1/4-8 - 3032376



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, pin assignment: 1, 4, color: red

---

Plug-in bridge - FBS 1/3/5-8 - 3032389



Plug-in bridge, pitch: 8.2 mm, width: 39.3 mm, number of positions: 5, pin assignment: 1,3,5, color: red

---

Plug-in bridge - FBS 2-8 CT - 3033830



Plug-in bridge, pitch: 8.2 mm, width: 14.7 mm, number of positions: 2, color: orange

---

Plug-in bridge - FBS 3-8 CT - 3033831



Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: orange

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Plug-in bridge - FBS 4-8 CT - 3033832



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, color: orange

---

Plug-in bridge - FBS 2-8 BU - 3032567



Plug-in bridge, pitch: 8.2 mm, width: 14.7 mm, number of positions: 2, color: blue

---

Plug-in bridge - FBS 3-8 BU - 3032570



Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: blue

---

Plug-in bridge - FBS 4-8 BU - 3032583



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, color: blue

---

Plug-in bridge - FBS 5-8 BU - 3032596



Plug-in bridge, pitch: 8.2 mm, width: 39.3 mm, number of positions: 5, color: blue

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Plug-in bridge - FBS 6-8 BU - 3032677



Plug-in bridge, pitch: 8.2 mm, width: 47.5 mm, number of positions: 6, color: blue

---

Plug-in bridge - FBS 10-8 BU - 3032606



Plug-in bridge, pitch: 8.2 mm, width: 80.3 mm, number of positions: 10, color: blue

---

### Labeled terminal marker

Zack marker strip - ZB 8 CUS - 0825011



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

Marker for terminal blocks - UC-TM 8 CUS - 0824597



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

Marker for terminal blocks - UCT-TM 8 CUS - 0829616



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

#### Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

#### Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

#### Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

### Plug

#### Interruption plug - FIP-3/1 SERVICE - 3069921

Interruption plug, number of positions: 1, width: 13.6 mm, color: green



#### Interruption plug - FIP-3/2 SERVICE - 3069920

Interruption plug, number of positions: 2, width: 16.3 mm, color: red



## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Interruption plug - FIP-3/3 SERVICE - 3069312

Interruption plug, number of positions: 3, width: 24.5 mm, color: red



Interruption plug - FIP-3/4 SERVICE - 3069313

Interruption plug, number of positions: 4, width: 32.6 mm, color: red



### Screwdriver tools

Screwdriver - SF-SL 0,8X4,0-100 - 1212551



Screwdriver, bladed (lasered), size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Screwdriver - SF-SL 0,8X4,0-100 S-VDE - 1212588



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

### Terminal marking

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10



## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

#### Marker for terminal blocks - UC-TM 8 - 0818072



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

#### Marker for terminal blocks - UCT-TM 8 - 0828740



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

#### Marker for terminal blocks - TMT (EX9,5)R - 0828295



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: snap into universal marker groove, snap into tall marker groove, for terminal block width: 50000 mm, lettering field size: 9.5 x 50000 mm, Number of individual labels: 1

#### Marker for terminal blocks - US-TM 100 - 0829255



Marker for terminal blocks, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into universal marker groove, lettering field size: 104 x 9.8 mm, Number of individual labels: 13

### Test plug terminal block

#### Test plug - FTPR-3/7S - 3069967



Test plug, With twist grip, nom. voltage: 400 V AC/DC, nominal current: 20 A, number of positions: 7, width: 87.9 mm, color: gray

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Test plug - FTP-3/7S - 3069960



Test plug, nom. voltage: 400 V AC/DC, nominal current: 20 A, number of positions: 7, width: 89.7 mm, color: gray

---

Test plug - FTP-2/1 SERVICE - 3069469



Test plug, number of positions: 1, width: 9 mm, color: red

---

Test plug - FTPC-3/7S - 3069937



Test plug, nom. voltage: 400 V AC/DC, nominal current: 20 A, number of positions: 7, width: 88.6 mm, color: gray

---

Test socket

Test adapter - PAI-4-N GY - 3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

---

Test adapter - PAI-4-FIX BU - 3032729



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: blue

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Test adapter - PAI-4-FIX OG - 3034455



4 mm test adapter, for terminal blocks with 8.2 mm pitch

---

Test adapter - PAI-4-FIX YE - 3032745



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: yellow

---

Test adapter - PAI-4-FIX RD - 3032732



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: red

---

Test adapter - PAI-4-FIX GN - 3032758



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: green

---

Test adapter - PAI-4-FIX BK - 3032774



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: black

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Test adapter - PAI-4-FIX GY - 3032790



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: gray

---

Test adapter - PAI-4-FIX VT - 3032761



Test adapter, for 4 mm test plug and terminal blocks with 4.2 mm ... 8.2 mm pitch, color: violet

---

Test adapter - PAI-4-FIX BN - 3032787



Test adapter, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: brown

---

Test adapter - PAI-4-FIX WH - 3032797



4 mm test adapter, for terminal blocks with 8.2 mm pitch

---

Test adapter - PAIS-4-FIX GY - 3032791



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: gray

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Test adapter - PAIS-4-FIX BK - 3032792



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: black

---

Test adapter - PAIS-4-FIX RD - 3032793



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: red

---

Test adapter - PAIS-4-FIX BU - 3032798



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: blue

---

Test adapter - PAIS-4-FIX YE - 3032799



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: yellow

---

Test adapter - PAIS-4-FIX GN - 3032801



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: green

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Test adapter - PAIS-4-FIX VT - 3032802



Test adapter, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: violet

---

Female test connector - PSBJ-URTK 6 FARBLOS - 3026450



Female test connector, color: transparent

---

Female test connector - PSBJ-URTK 6 RD - 3026719



Female test connector, color: red

---

Female test connector - PSBJ-URTK 6 BU - 3026434



Female test connector, color: blue

---

Female test connector - PSBJ-URTK 6 YE - 3026405



Female test connector, color: yellow

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Female test connector - PSBJ-URTK 6 GN - 3026418



Female test connector, color: green

---

Female test connector - PSBJ-URTK 6 VT - 3026421



Female test connector, color: violet

---

Female test connector - PSBJ-URTK 6 GY - 3026612



Female test connector, color: gray

---

Female test connector - PSBJ-URTK 6 BK - 3026447



Female test connector, color: black

---

Female test connector - PSBJ-URTK 6 BN - 3026971



Female test connector, color: brown

---

## Test terminal strip - RSCWE 6-3/7 - 3969923

### Accessories

Female test connector - PSBJ-URTK 6 WH - 3026448



Female test connector, color: white

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>