




BAG, DISSIPATIVE PINK POLY

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 5

Transparent light pink, low density polyethylene. Bags have low charging (antistatic) properties. Dissipative so that electrostatic charges are removed to ground when bag is grounded.

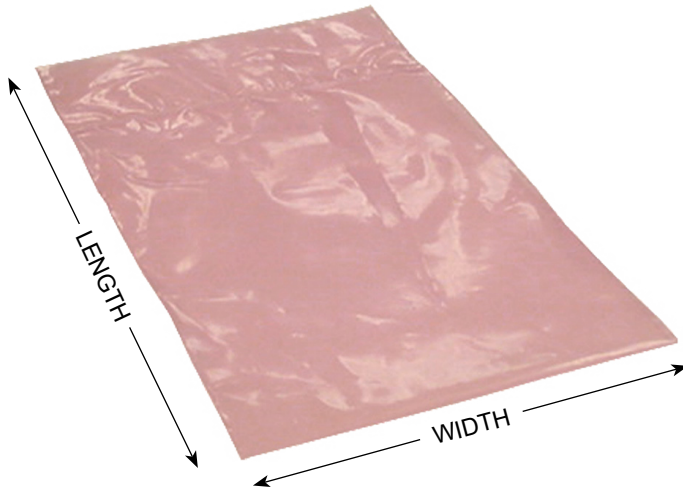

Specifications:

Electrical Properties

Electrical Properties	Typical Value
Static Decay:	< 1.0 sec.
Surface Resistance:	1×10^4 to $< 1 \times 10^{11}$ ohms
Polycarbonate Haze:	NE
Corrosivity Observations:	NE

Test Procedures/Method

ASTM 101 Method 4046
ANSI/ESD STM11.11
72 hr contact
MIL-STD-3010, M3005

Physical Properties

Material Thickness:	4.0mils (0.004", 0.1016mm), +/- 10%	
Melt Index:	0.050 gm/ 10 min	ASTM D-1283
Density:	0.923 gm/cc	ASTM D-1505
Dart Impact:	230 gms	ASTM D-1709
Coefficient of Friction:	MD 24,000 psi	ASTM D-1894 (unmodified film)
1% Secant Modulus (Stiffness):	MD 25,000 psi	ASTM D-882

Per ANSI/ESD S541 section 6.1 Inside an ESD Protected Area "Packaging used within an EPA (that satisfies the minimum requirements of ANSI/ESD S20.20) shall be:

- Low charge generation.
- Dissipative or conductive materials for intimate contact."

RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2013-12-16 are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Protektive Pak [Limited Warranty at ProtektivePak.com](#).



Made in the United States of America

Specifications are subject to change without notice.

TRANSPARENT STATIC DISSIPATIVE (PINK POLY)

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
[ProtektivePak.com](#)

DRAWING
NUMBER
49100

DATE
June
2017

Item No.	Size (in.) W x L	Item No.	Size (in.) W x L
49100	2 x 3	49109	8 x 10
49101	3 x 4	49110	8 x 12
49102	3 x 5	49111	10 x 12
49103	4 x 6	49112	10 x 14
49104	5 x 7	49113	10 x 20
49105	5 x 8	49114	12 x 16
49106	6 x 8	49116	15 x 18
49107	6 x 9	49119	18 x 24
49108	6 x 10		

Packaged 100 per package

Dimensional tolerances unless otherwise specified:
L: +/- 0.250" / W: +/- 0.250"

PROTEKTIVE PAK