

Typ EI60/25,5 25 VA

Range available ex stock*


EN 61558

Potted under vacuum

Two-chamber bobbin

Temperature class $t_a 40^\circ\text{C/E}$

- * Other primary and secondary voltages on request
- * Other temperature classes on request
- * CCA-Certificate available
- * Weight 0.67 kg
- * Packaging unit: 18 pieces
- * Frequency 50/60Hz
- * Class 2 available on request
- * Dual Primary Voltages available

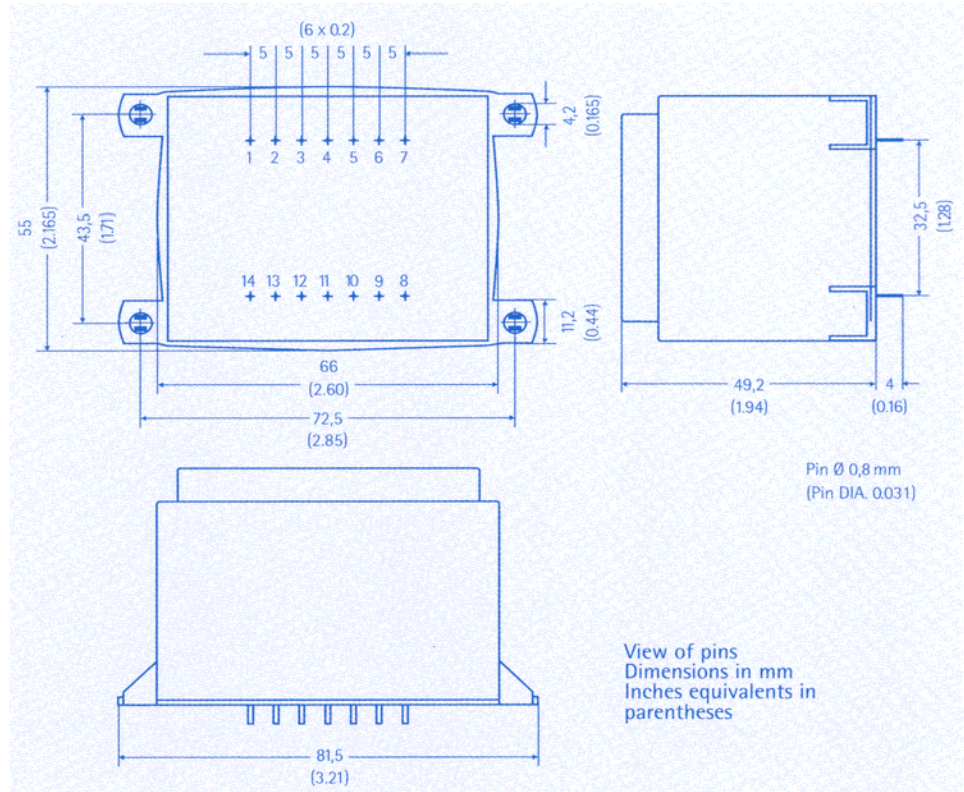

Primary	Pin	Secondary	No-Load Voltage	Pin	Types Ref. No.	Approvals
115V	1 - 6	6V 4160 mA	6.90 V	9 - 13	BV 060-0220.0	3 · 10
115V	1 - 6	9V 2780 mA	10.30 V	9 - 13	BV 060-0221.0	3 · 10
115V	1 - 6	12V 2080 mA	13.60 V	9 - 13	BV 060-0222.0	3 · 10
115V	1 - 6	15V 1670 mA	17.00 V	9 - 13	BV 060-0223.0	3 · 10
115V	1 - 6	18V 1390 mA	20.50 V	9 - 13	BV 060-0224.0	3 · 10
115V	1 - 6	24V 1040 mA	27.00 V	9 - 13	BV 060-0225.0	3 · 10
115V	1 - 6	2 x 6V 2080 mA	2 x 6.90 V	8-9 / 13-14	BV 060-0226.0	3 · 10
115V	1 - 6	2 x 9V 1390 mA	2 x 10.50 V	8-9 / 13-14	BV 060-0227.0	3 · 10
115V	1 - 6	2 x 12V 1040 mA	2 x 13.60 V	8-9 / 13-14	BV 060-0228.0	3 · 10
115V	1 - 6	2 x 15V 833 mA	2 x 17.30 V	8-9 / 13-14	BV 060-0229.0	3 · 10
115V	1 - 6	2 x 18V 694 mA	2 x 20.50 V	8-9 / 13-14	BV 060-0230.0	3 · 10
115V	1 - 6	2 x 24V 520 mA	2 x 27.20 V	8-9 / 13-14	BV 060-0231.0	3 · 10

Specifications subject to change without notice.

Approval
symbol



TRANS **era** – there is competence behind it
Electronics Inc.

Transera Electronics Inc., 7 Colby Court, Waterloo, Ontario N2V 1Y9, Canada, Phone +519-885-5040, Fax +519-885-55 52
www.trans-era.com, sales@trans-era.com