


Technical Data Sheet

Rosenberger

RPC-2.92

Calibration Kit
Jack

02K30R-MSOTS3

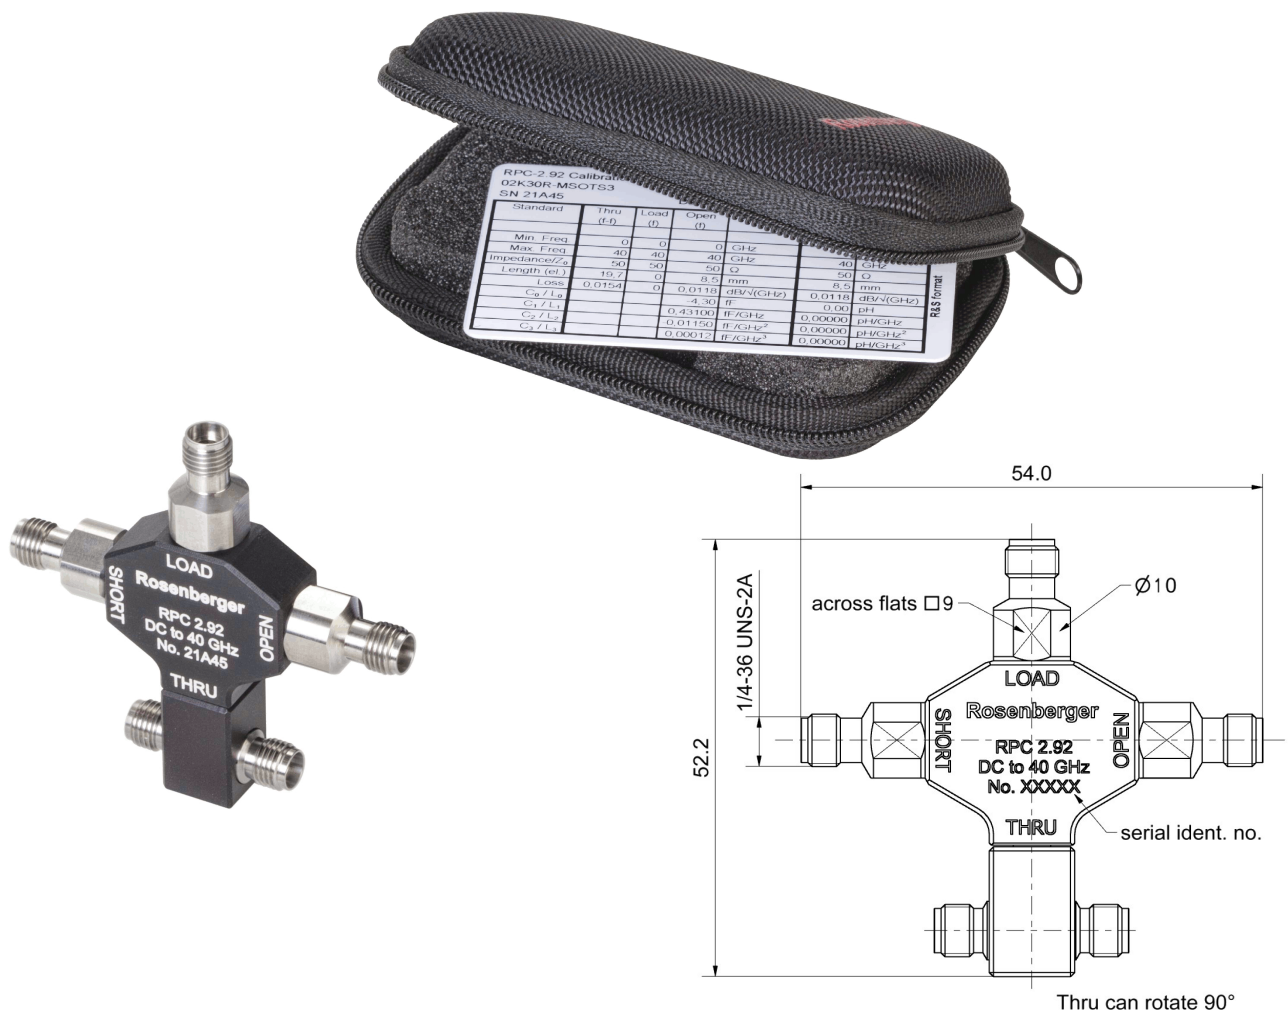

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-35
RPC-3.50 and SMA

Contents and Documentation

This kit is delivered with

- **Standard Definitions Card**
Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- **Test Results Documentation**
- **Hard Shell Case**
- **Protection Caps**

Material and plating

Connector parts

Center conductor
Outer conductor
Body
Dielectric
Substrate

Material

CuBe
Stainless steel
Aluminum
PS
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Passivated
black anodized

Technical Data Sheet		Rosenberger
RPC-2.92	Calibration Kit Jack	02K30R-MSOTS3
Electrical data Frequency range DC to 40.0 GHz Thru Return loss ≥ 32 dB, DC to 4 GHz ≥ 30 dB, 4 GHz to 26.5 GHz ≥ 28 dB, 26.5 GHz to 40 GHz Open Error from nominal phase¹ $\leq 1.5^\circ$, DC to 4 GHz $\leq 4.0^\circ$, 4 GHz to 26.5 GHz $\leq 5.0^\circ$, 26.5 GHz to 40.0 GHz Short Error from nominal phase² $\leq 1.5^\circ$, DC to 4 GHz $\leq 4.0^\circ$, 4 GHz to 26.5 GHz $\leq 5.0^\circ$, 26.5 GHz to 40.0 GHz Load Return loss ≥ 40.0 dB, DC to 4 GHz ≥ 28.0 dB, 4 GHz to 26.5 GHz ≥ 25.0 dB, 26.5 GHz to 40.0 GHz DC Resistance 50 $\Omega \pm 0.5 \Omega$ Power handling ≤ 0.5 W ¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances ² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance Mechanical data Mating cycles ≥ 500 Maximum torque 1.70 Nm Recommended torque 0.90 Nm Gauge 0.00 mm to 0.08 mm General standard definitions For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating. Thru Offset Z_0 / Impedance / Z_0 50 Ω Offset Delay 65.712 ps Length (electrical) / Offset Length 19.70 mm Offset Loss 2.70 GΩ/s Loss 0.0154 dB/$\sqrt{\text{GHz}}$ Line Loss @ 1GHz 0.0008 dB/mm Open Offset Z_0 / Impedance / Z_0 50 Ω Offset Delay 28.353 ps Length (electrical) / Offset Length 8.50 mm Offset Loss 2.40 GΩ/s Loss 0.0118 dB/$\sqrt{\text{GHz}}$ Fringing Capacitances $C_0 = -4.30000 \times 10^{-15}$ F / -4.30000 fF $C_1 = 431.000 \times 10^{-27}$ F/Hz / 0.43100 fF /GHz $C_2 = -11.5000 \times 10^{-36}$ F/Hz² / -0.01150 fF /GHz² $C_3 = 0.12000 \times 10^{-45}$ F/Hz³ / 0.00012 fF /GHz³		
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 2 / 3

Technical Data Sheet				Rosenberger			
RPC-2.92		Calibration Kit Jack		02K30R-MSOTS3			
Short Offset Z_o / Impedance / Z_o50 Ω Offset Delay28.353 ps Length (electrical) / Offset Length8.50 mm Offset Loss2.40 GΩ/s Loss0.0118 dB/√GHz Short InductanceL₀ = 0.0000 x 10⁻¹² H / 0.0000 pH L₁ = 0.0000 x 10⁻²⁴ H/Hz / 0.0000 pH/GHz L₂ = 0.0000 x 10⁻³³ H/Hz² / 0.0000 pH/GHz² L₃ = 0.0000 x 10⁻⁴² H/Hz³ / 0.0000 pH/GHz³ Load Offset Z_o / Impedance / Z_o50 Ω Offset Delay0.0000 ps Length (electrical) / Offset Length0.000 mm Offset Loss0.00 GΩ/s Loss0.0000 dB/√GHz Environmental data Operating temperature range³+ 20 °C to +26 °C Rated temperature range of use⁴0 °C to +50 °C Storage temperature range- 40 °C to +85 °C RoHScompliant ³ Temperature range over which these specifications are valid. ⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage Declaration of documentation Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards. Model based standard definitions of the calibration standards are reported in Agilent / Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Inspection interval Recommendation12 months Packing Standard1 pce in bag Weight36.9 g/pce While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Marcel Panicke	05.11.15	Markus Müller	17.04.20	i00	19-2083	Marion Striegler	17.04.20
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 3 / 3