



DO NOT SCALE FROM THIS PRINT



BSS-XXX-01-X-D-XX

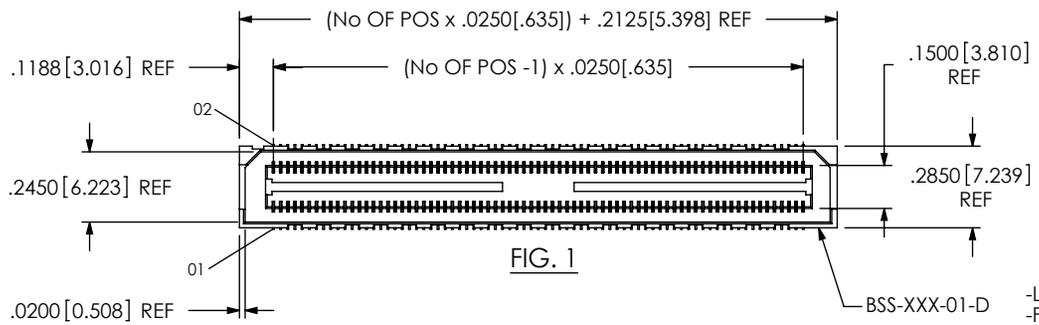


- No OF POSITIONS**
 -.025, -.050, -.075, *-100, *-125, *-150 (PER ROW)
- LEAD STYLE**
 -01
- OPTION**
 -A: ALIGNMENT PINS (USE BSS-XXX-01-D-A)
 -LC: LOCKING CLIPS (USE LC-08-TM-01)
 -TR: TAPE & REEL (100 POS MAX)
- ROW SPECIFICATION**
 -D: DOUBLE (USE BSS-XXX-01-D)
- PLATING SPECIFICATION**
 -L: LIGHT SELECTIVE GOLD W/ MATTE TIN TAILS (USE C-126-21-L) (SEE NOTE 9 & 11)
 -F: FLASH SELECTIVE GOLD W/ MATTE TIN TAILS (USE C-126-21-F) (SEE NOTE 7,9 & 11)
 -H: HEAVY GOLD (USE C-126-21-H) (SEE NOTE 11)
 -C: ELECTRO-POLISHED SELECTIVE (USE C-126-21-C. SEE NOTE 11)

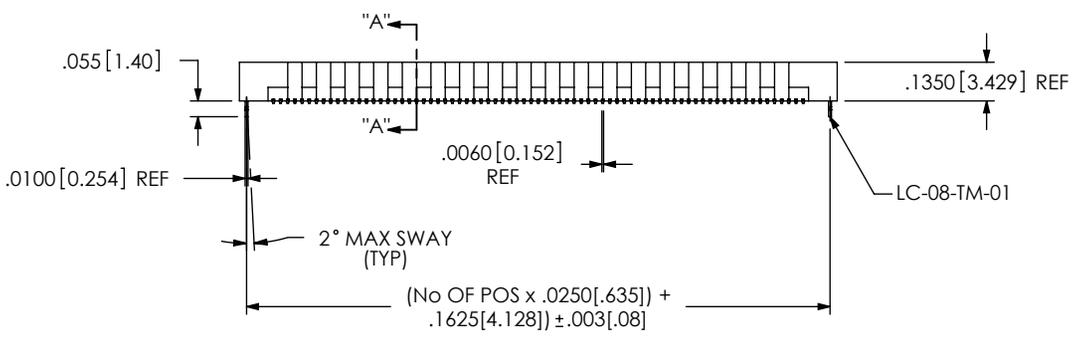

-LC: LOCKING CLIP OPTION SHOWN

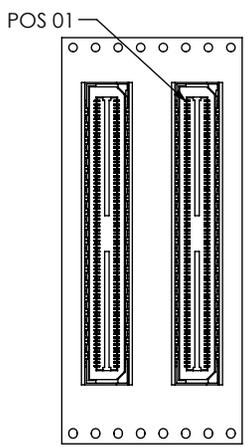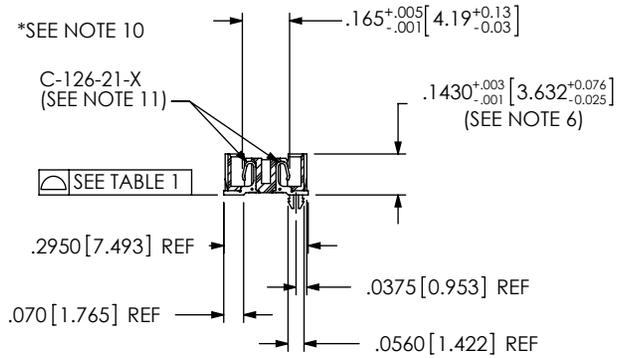

USER DIRECTION OF UN-REELING POCKET NOT DETAILED

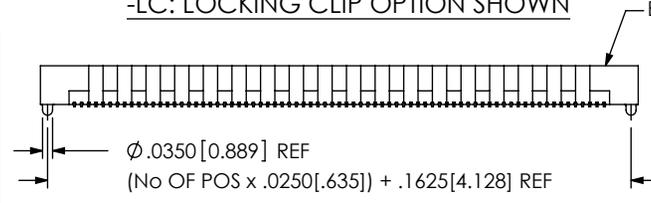

-A: ALIGNMENT PIN OPTION SHOWN


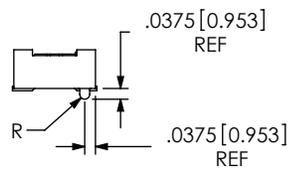



TABLE 1

| No OF POS | COPLANARITY |
|----------------|-------------|
| -025 THRU -075 | .0040[.102] |
| -100 THRU -150 | .0060[.152] |

- NOTES:**
1. REPRESENTS A CRITICAL DIMENSION.
 2. NOTE DELETED.
 3. BURR ALLOWANCE: .0015 [.038] MAX.
 4. MINIMUM PUSHOUT FORCE: .5 LB.
 5. NOTE DELETED.
 6. MAX VARIANCE OF .002[.51].
 7. -L PLATING CAN BE SUBSTITUTED FOR-F PLATING.
 8. RIBBED SIDEWALLS AT SAMTEC DISCRETION.
 9. MAY SUBSTITUTE C-126-01-X FOR C-126-21-X.
 10. FOR NEW APPLICATIONS REQUIRING THESE POSITIONS, PLEASE CONTACT SAMTEC INTERCONNECT PROCESSING GROUP.
 11. -100, -125 AND -150 POSITION PARTS USE C-269-11-X. DO NOT SUB C-126-XX-X.

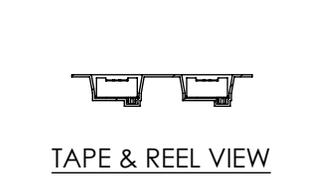

TAPE & REEL VIEW

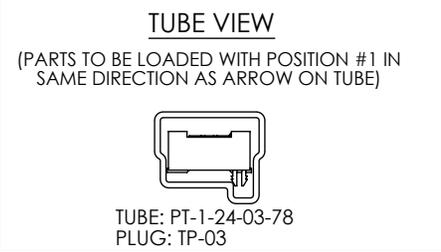

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
 DECIMALS ANGLES
 .XX: ±.01[.3]
 .XXX: ±.005[.13]
 .XXXX: ±.0020[.051]

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 1:0.6644
 INSULATOR: LCP. COLOR: BLACK. FLAMMABILITY RATING: UL94V0
 CONTACT: PHOS BRONZE

DESCRIPTION:
 .635mm DOUBLE ROW SOCKET ASSEMBLY

DWG. NO. **BSS-XXX-01-X-D-XX**

BY: DEAN P 06/23/1999 SHEET 1 OF 1