

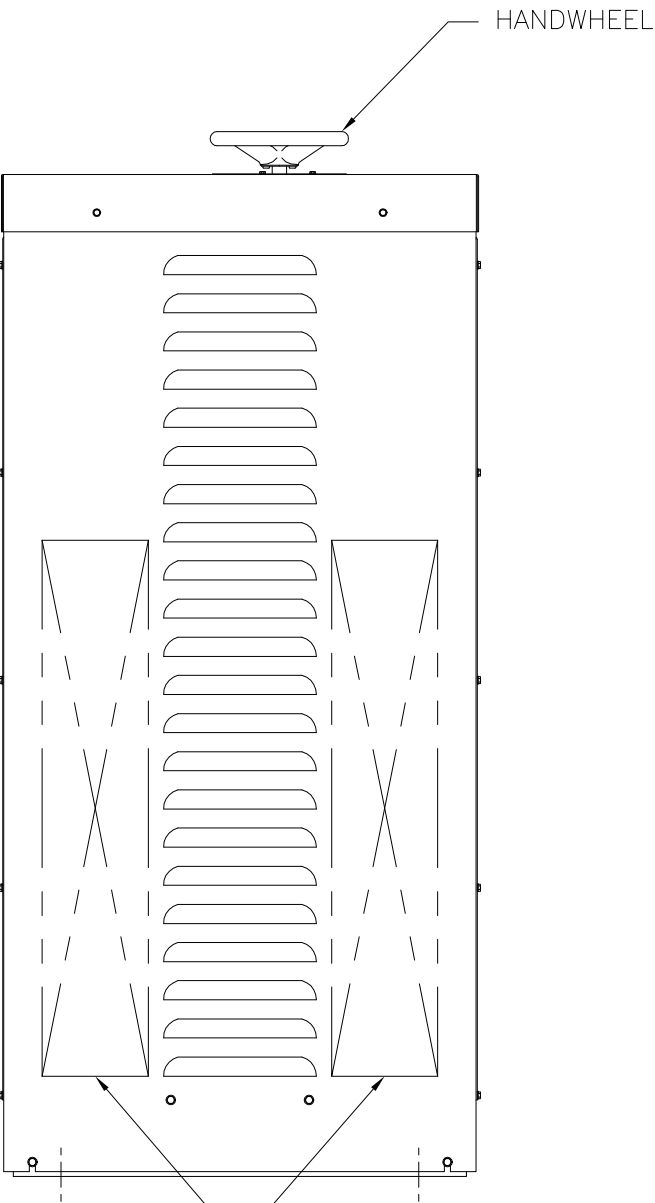
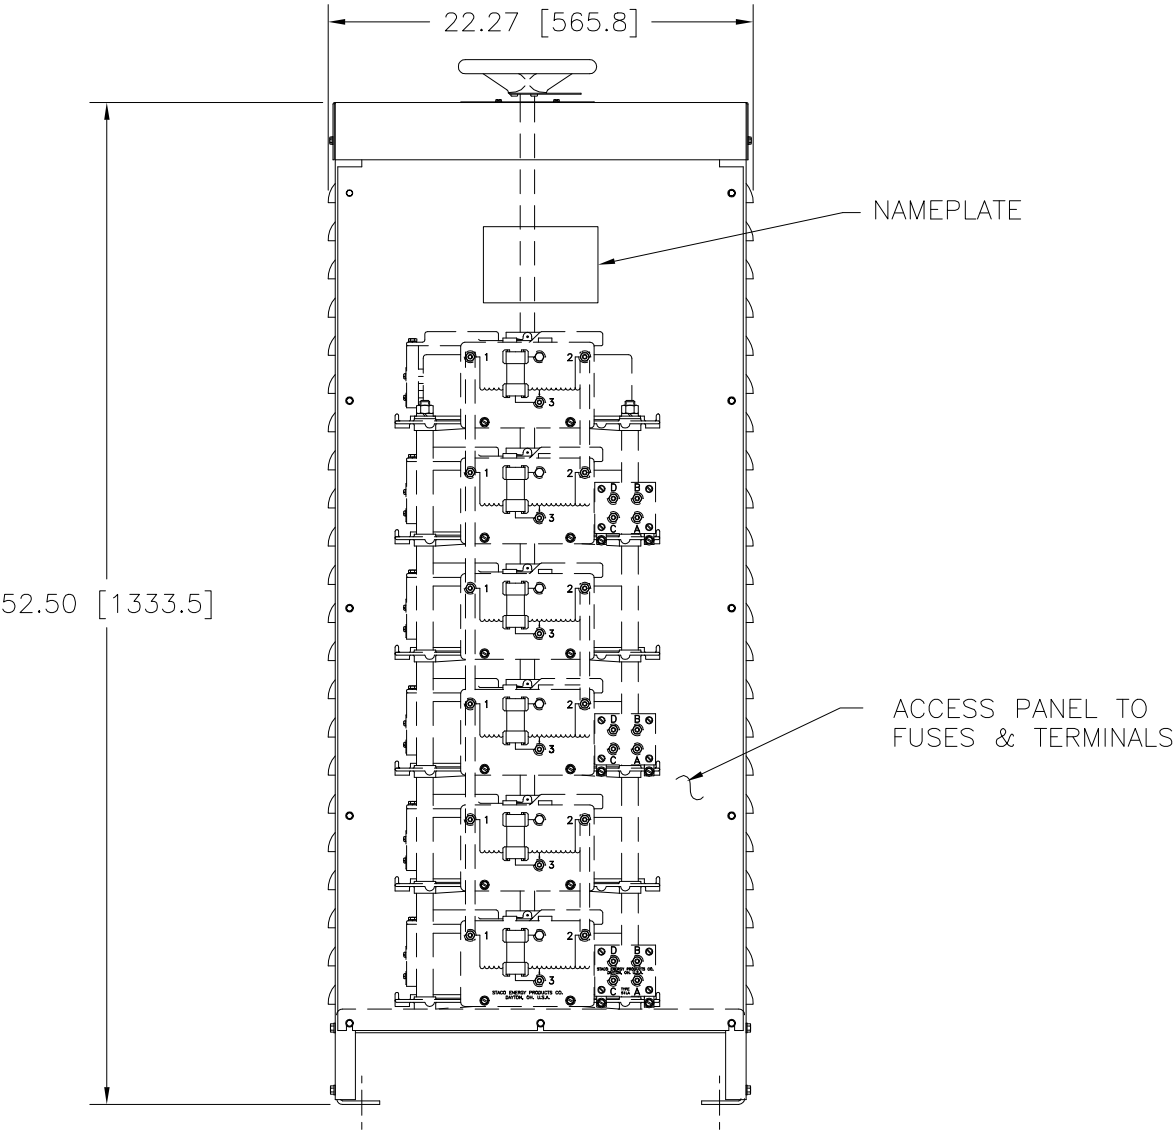


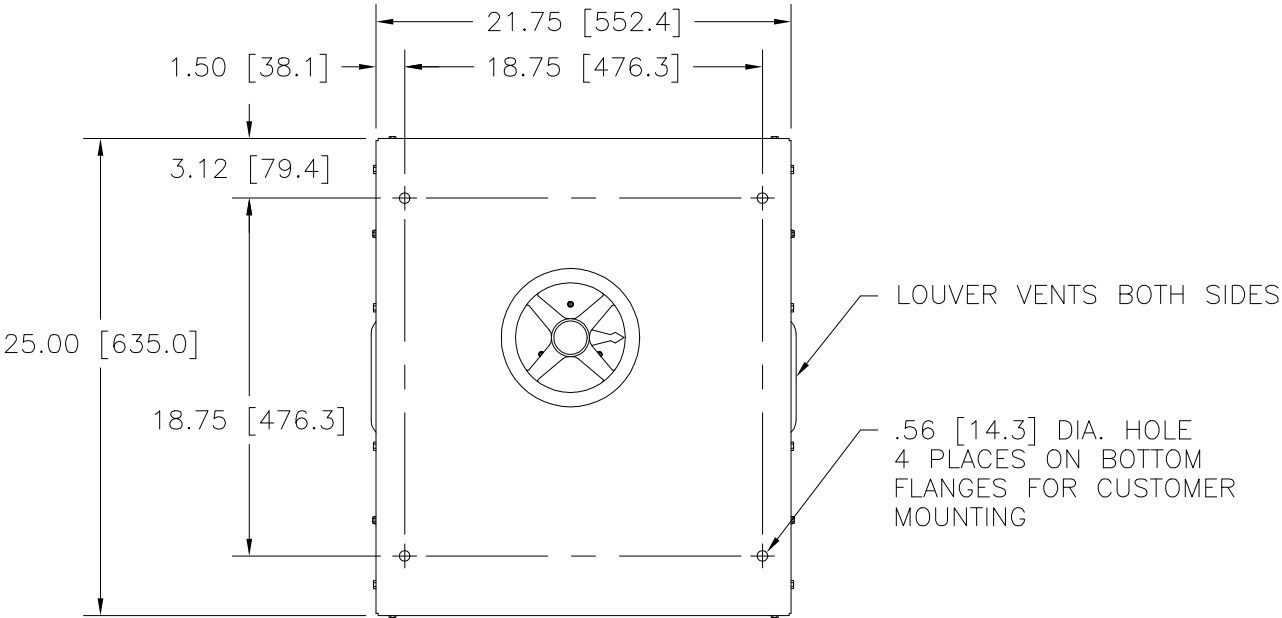

RECOMMENDED AREAS FOR CONDUIT ENTRY.

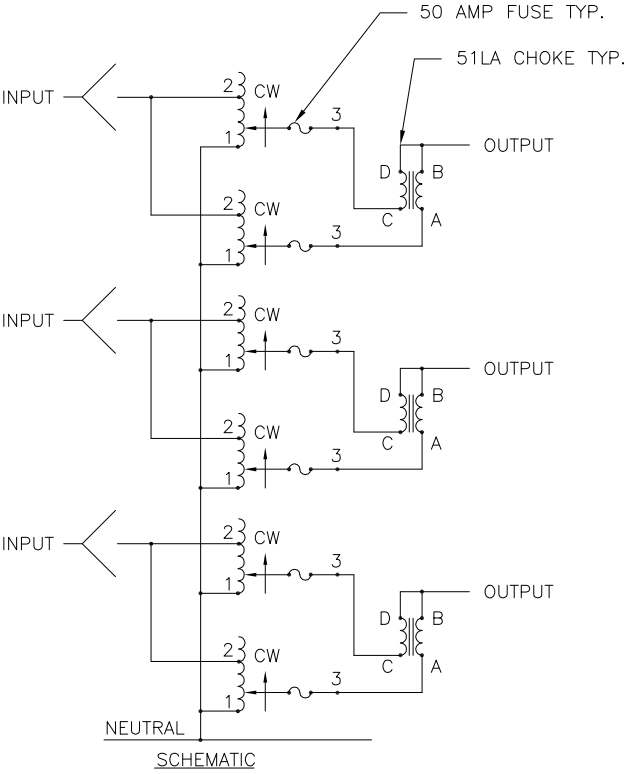

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
				MAX. AMPS	MAX. KVA			
THREE PHASE WYE	240	60	0-280	100	48.5	CW	2-2-2	B-B-B

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±				UNITS IN [mm]		SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 5011E-6Y		 A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.		
DECIMALS	HOLES	ANGLES	DRAFT							
.XX	.125	1°	1-1/2°							
MATERIAL :				ALL DIMENSIONS APPLY AFTER PLATING						
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.										
DRAWN BY TIM RAU		DATE 8/7/97	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL					DATE
CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO. 83008	DWG. SIZE	DWG. NO.					
ENGINEER	DATE	SCALE .2=1	SHEET 1 of 1	D	031-6782					