



DIMENSIONS (mm)

X=Contact with high voltage cable

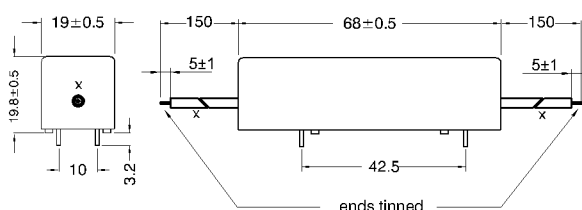


LAYOUT

pitch 2.5 mm/Top view



MARKING



PINS

 Pins: Ø0.8 mm
 L_{pin} = 3.2±0.3 mm
 Material: Cu-alloy tinned


CABLE

 AWG20
 Silicone high-voltage wire
 UL-Style 3239
 p/n 4001101015

MARKING

 MEDER-Label
 Type/Layout
 Production code,
 EN60062/Factory code

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		540	600	660	Ohm
Coil voltage			24		VDC
Rated power			960		mW
Thermal resistance	max. Relay temperature = operating temperature + self heating		24		K/W
Pull-In voltage				18	VDC
Drop-Out voltage		2			VDC

Contact data 69	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			50	W
Switching voltage	DC or Peak AC			10,000	V
Switching current	DC or Peak AC			3	A
Carry current	DC or Peak AC			5	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			TOhm
Breakdown voltage	according to IEC 255-5	15			kV DC
Operate time incl. bounce	measured with 40% overdrive			3	ms
Release time	measured with no coil excitation			1,5	ms
Capacitance	@ 10 kHz across open switch		0,8		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Number of contacts			1		
Contact - form			A - NO		
Dielectric Strength Coil/Contact	according to IEC 255-5	15			kV DC
Insulation resistance Coil/Contact	RH <45%, 200 VDC test voltage	10			TOhm
Case colour					
Housing material			UL94-HB File-No. E45329 (M); Lexan 141R / GE		
Sealing compound			UL94-V2 File-No E72640 (M) PU E8702 FW-Z/Herberts		
Mounting or coil material			UL94-V-0 File No. QMFZ-2. E42337; CELANEX PBT		
Connection pins			Copper alloy tin plated		
Magnetic Shield			no		
Reach / RoHS conformity			yes		



Products for tomorrow...

Europe: +49 / 7731 8399 0

| Email: info@meder.com

USA: +1 / 508 295 0771

| Email: salesusa@meder.com

Asia: +852 / 2955 1682

| Email: salesasia@meder.com

Item No.:

8424169158

Item:

HM24-1A69-150-UL

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-35		105	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C
Washability		fully sealed			

General data	Conditions	Min	Typ	Max	Unit
Total weight			50		g
Packaging		palette per 10 piece			

Modifications in the sense of technical progress are reserved

Designed at: 15.04.04 Designed by: EBUNKE

Approval at: 27.01.09 Approval by: KOLBRICH

Last Change at: 23.07.10 Last Change by: WKOVACS

Approval at: 23.07.10 Approval by: KOLBRICH

Version: 04