


80 A 800 V high temperature thyristor (SCR) in D³PAK package

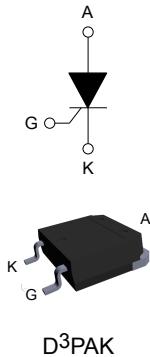

Features

- High junction temperature: $T_j = 150 \text{ }^\circ\text{C}$
- Blocking voltage: $V_{DRM} = V_{RRM} = 800 \text{ V}$
- Nominal current: $I_{T(RMS)} = 80 \text{ A}$
- Gate triggering current: $I_{GT} \text{ max.} = 50 \text{ mA}$
- High noise immunity: $dV/dt > 1 \text{ kV}/\mu\text{s}$
- Surface mounted device D³PAK for compact designs
- Increase of thermal margin due to extended T_j up to 150 °C
- Low I_D and I_R in blocking state
- Ecopack2 (includes halogen free & RoHS compliance)

Applications

- AC-DC rectifier controlled bridge
- Motorbike voltage regulator
- Variable speed motor drive
- Battery charging system
- AC solid state relay
- By-pass switch of UPS
- Industrial welding systems
- Motor soft starter

Product status link	
TM8050H-8D3	
Product summary	
$I_{T(RMS)}$	80 A
V_{DRM}/V_{RRM}	800 V
I_{GT}	50 mA
T_j	150 °C

Description

Available in power surface mount package (D³PAK), the TM8050H-8D3 device is an 800V SCR thyristor suitable for applications where high power switching ($I_{T(RMS)} = 80 \text{ A}$) and low power dissipation ($V_{TM} = 1.55 \text{ V}$ at 160 A) are key features. These features make it ideal for motorbike voltage regulator, by-pass AC switch, controlled rectifier bridge, solid state relay, battery charger, welding equipment and motor driver applications.

1 Characteristics

Table 1. Absolute maximum ratings (limiting values), $T_j = 25^\circ\text{C}$ unless otherwise stated

Symbol	Parameter			Value	Unit
$I_{T(\text{RMS})}$	RMS on-state current (180 ° conduction angle)			80	A
$I_{T(\text{AV})}$	Average on-state current (180 ° conduction angle)			50	A
I_{TSM}	Non repetitive surge peak on-state current, $V_R = 0 \text{ V}$		$t_p = 8.3 \text{ ms}$	731	A
			$t_p = 10 \text{ ms}$		
I^2t	I^2t value for fusing		$T_j = 25^\circ\text{C}$	2245	A^2s
V_{RRM}/V_{DRM}	Maximum repetitive symmetric blocking voltage			800	V
dl/dt	Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $tr \leq 100 \text{ ns}$	$F = 50 \text{ Hz}$	$T_j = 25^\circ\text{C}$	200	$\text{A}/\mu\text{s}$
I_{GM}	Peak gate current	$t_p = 20 \mu\text{s}$	$T_j = 150^\circ\text{C}$	8	A
$P_{G(\text{AV})}$	Average gate power dissipation		$T_j = 150^\circ\text{C}$	1	W
V_{RGM}	Maximum peak reverse gate voltage			5	V
T_{stg}	Storage junction temperature range			-40 to +150	$^\circ\text{C}$
T_j	Operating junction temperature range			-40 to +150	$^\circ\text{C}$
T_L	Maximum lead temperature soldering during 10 s			245	$^\circ\text{C}$

Table 2. Electrical characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Test conditions			Value	Unit		
I_{GT}	$V_D = 12 \text{ V}$, $R_L = 33 \Omega$			Min.	2.5		
				Max.	50		
V_{GT}	$V_D = 12 \text{ V}$, $R_L = 33 \Omega$			Max.	1.5		
V_{GD}	$V_D = V_{DRM}$, $R_L = 3.3 \text{ k}\Omega$	$T_j = 125^\circ\text{C}$		Min.	0.2		
$I_H^{(1)}$	$I_T = 500 \text{ mA}$, gate open			Max.	100		
I_L	$I_G = 1.2 \times I_{GT}$			Max.	125		
t_{gt}	$I_T = 80 \text{ A}$, $V_D = V_{DRM}$, $I_G = 200 \text{ mA}$, $dl_G/dt = 0.2 \text{ A}/\mu\text{s}$			Typ.	3		
dV/dt	$V_D = 67\% V_{DRM}$, gate open	$T_j = 150^\circ\text{C}$		Min.	1000		
t_q	$I_T = 33 \text{ A}$, $dl_T/dt = 10 \text{ A}/\mu\text{s}$, $VR = 75 \text{ V}$, $V_D = 400 \text{ V}$, $dV_D/dt = 20 \text{ V}/\mu\text{s}$, $t_p = 100 \mu\text{s}$		$T_j = 150^\circ\text{C}$	Max.	150		
				Max.	μs		

1. For both polarities of A_2 referenced to A_1

Table 3. Static characteristics

Symbol	Test conditions		Value	Unit
$V_{TM}^{(1)}$	$I_{TM} = 160 \text{ A}$, $t_p = 380 \mu\text{s}$	$T_j = 25^\circ\text{C}$	Max.	1.55
$V_{t0}^{(1)}$	On state threshold voltage	$T_j = 150^\circ\text{C}$	Max.	0.85
$R_D^{(1)}$	On state dynamic resistance	$T_j = 150^\circ\text{C}$	Max.	5.5
I_{DRM}, I_{RRM}	$V_D = V_{DRM} = V_R = V_{RRM} = 800 \text{ V}$	$T_j = 25^\circ\text{C}$	Max.	20
		$T_j = 150^\circ\text{C}$	Max.	2.5

1. For both polarities of A2 referenced to A1

Table 4. Thermal parameters

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case (DC, max.)	0.25	°C/W
$R_{th(j-a)}$	Junction to ambient (DC, typ., $S_{CU} = 2.1 \text{ cm}^2$)	40	°C/W

1.1 Characteristics curves

Figure 1. Maximum average power dissipation versus average on-state current

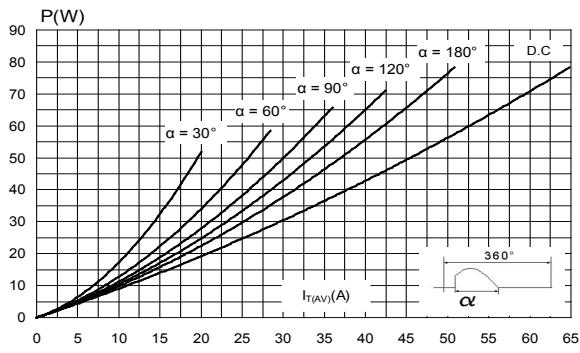


Figure 2. Average and DC on-state current versus case temperature

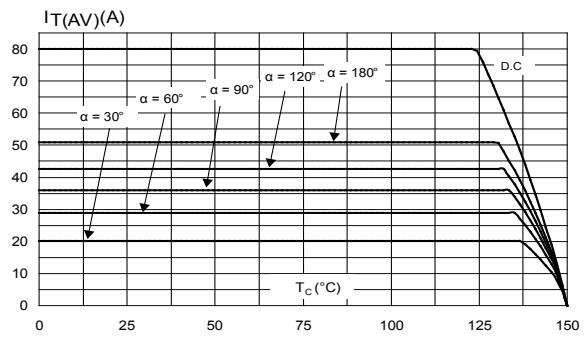


Figure 3. On-state characteristics (maximum values)

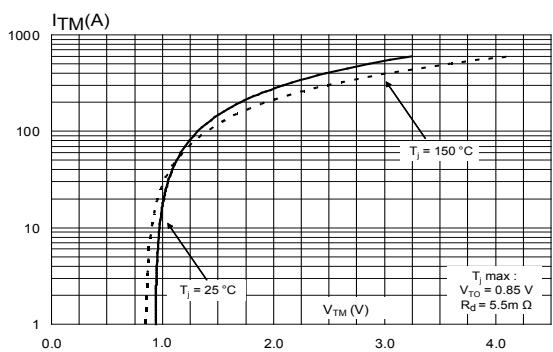


Figure 4. Average and DC on-state current versus ambient temperature

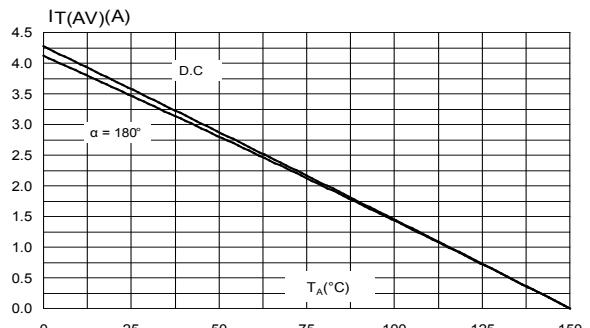


Figure 5. Relative variation of thermal impedance versus pulse duration

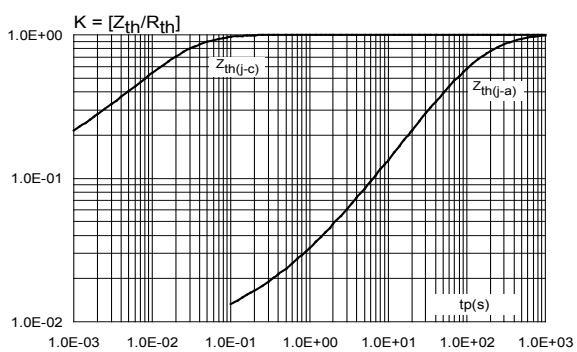


Figure 6. Thermal resistance junction to ambient versus copper surface under tab (D³PAK printed circuit board FR4, copper thickness: 35 µm)

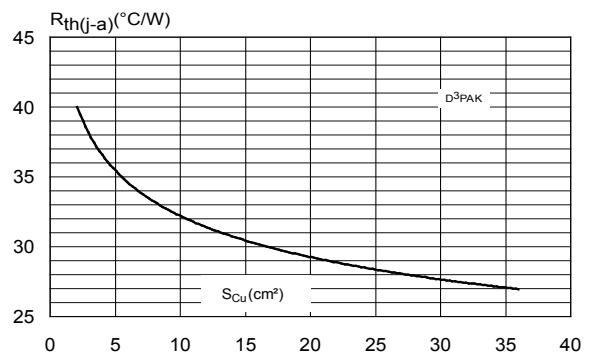
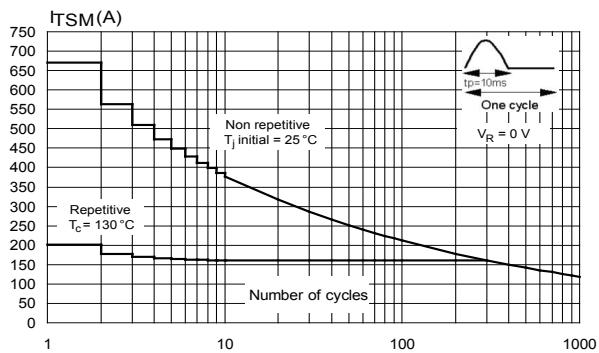
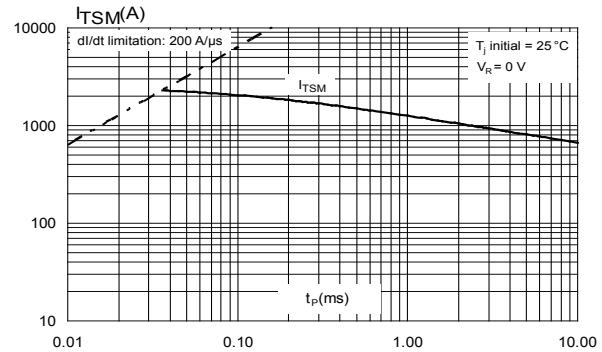
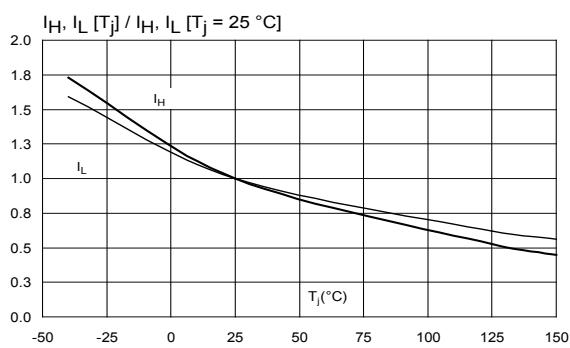
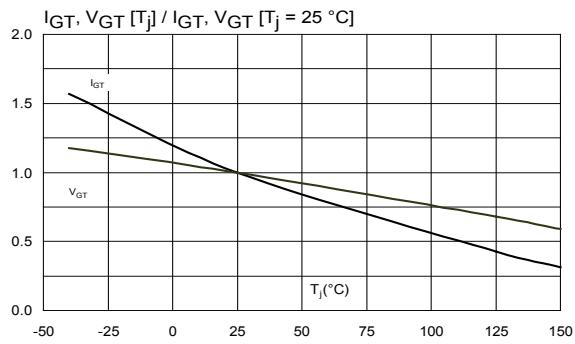
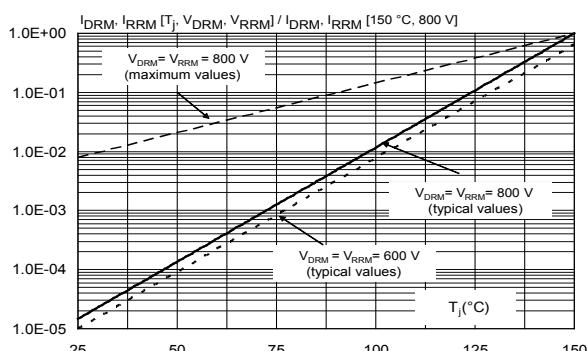
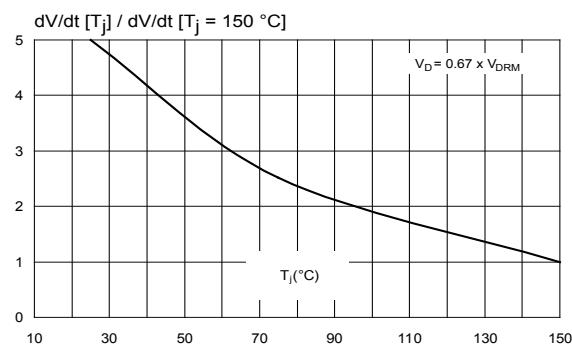


Figure 7. Surge peak on-state current versus number of cycles**Figure 8. Non repetitive surge peak on-state current for a half cycle sine pulse versus pulse width ($t_p < 10$ ms)****Figure 9. Relative variation of holding current and latching current versus junction temperature (typical values)****Figure 10. Relative variation of gate trigger current and gate voltage versus junction temperature****Figure 11. Relative variation of leakage current versus junction temperature for different values of blocking voltage****Figure 12. Relative variation of static dV/dt immunity versus junction temperature (typical values)**

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 D³PAK package information

- Epoxy meets UL 94,V0
- Lead-free package leads, halogen-free molding resin
- Pre-conditioning moisture sensitivity MSL 1

Figure 13. D³PAK package dimension definitions

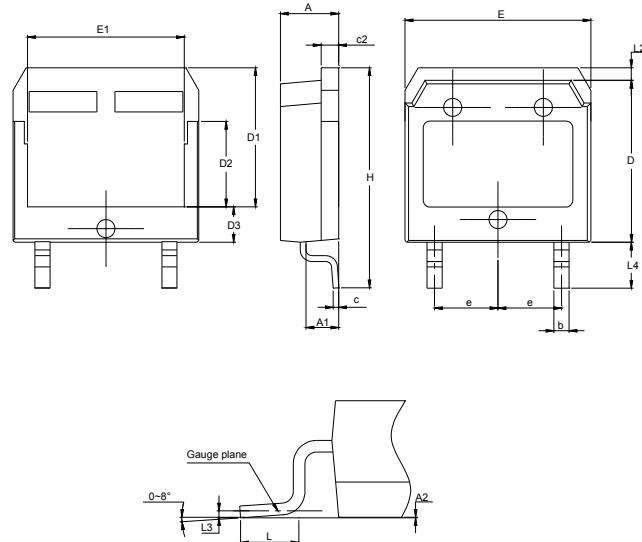
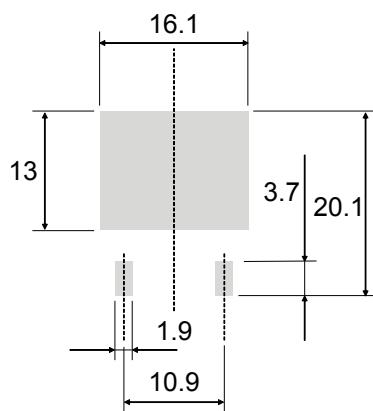


Table 5. D³PAK package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (dimension in inches are given for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.90		5.10	0.1929		0.2008
A1	2.70		2.90	0.1063		0.1142
A2	0.02		0.25	0.0008		0.0098
b	1.15		1.45	0.0453		0.0571
c	0.40		0.65	0.0157		0.0256
c2	1.45		1.61	0.0571		0.0634
D	13.80		14.00	0.5433		0.5512
D1	11.80		12.10	0.4646		0.4764
D2	7.50		7.80	0.2953		0.3071
D3	2.90		3.20	0.1142		0.1260
E	15.85		16.05	0.6240		0.6319
E1	13.30		13.60	0.5236		0.5354
e		5.45			0.2146	
H	18.70		19.10	0.7362		0.7520
L	1.70		2.00	0.0669		0.0789
L2	1.00		1.15	0.0394		0.0453
L3		0.25			0.0098	
L4	3.80		4.10	0.1496		0.1614

Figure 14. Minimum footprint (dimensions in mm)

3 Ordering information

Figure 15. Ordering information scheme

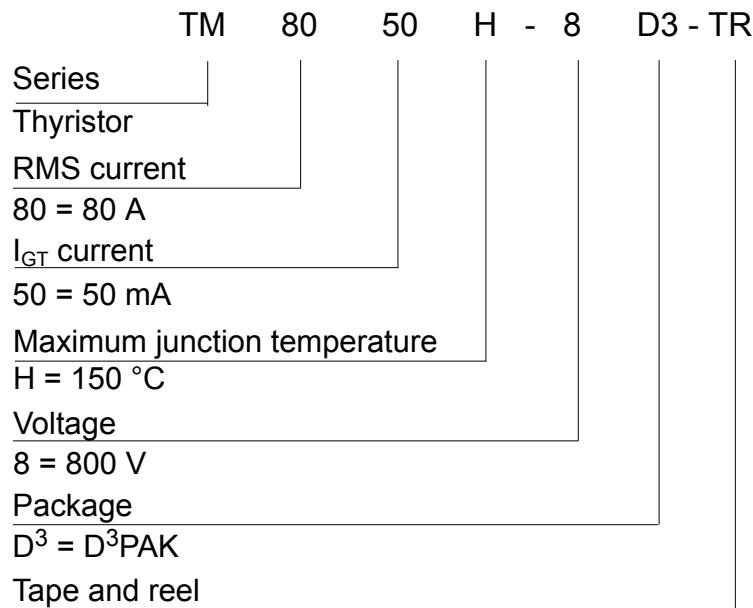


Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
TM8050H-8D3-TR	TM8050H8	D ³ PAK	4.2 g	400	Tape and reel

Revision history

Table 7. Document revision history

Date	Revision	Changes
11-Feb-2016	1	Initial release.
01-Apr-2016	2	Updated Table 3: "Electrical characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)".
02-May-2016	3	Updated Thermal parameters.
30-Jul-2019	4	Updated Table 1 , Figure 8 and Figure 9 . Minor text change.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved