

- ✧ High surge current capability
- ✧ Low power loss
- ✧ For use in low voltage, high frequency inverter, Free wheeling, and polarity protection application



Mechanical Data

- ✧ Case : ITO-220AC
- ✧ Epoxy :UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed:
260°C/10 seconds. 16", (4.06mm) from case.
- ✧ Weight: 1.70 grams

Ordering Information

Part No.	Package	Packing	Packing code	Packing code (Green)
UGF8J	ITO-220AC	50 / TUBE	C0	C0G

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	UGF8J
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600
Maximum RMS Voltage	V_{RMS}	420
Maximum DC blocking voltage	V_{DC}	600
Maximum Average Forward Rectified Current	$I_{F(AV)}$	8
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	65
Maximum Instantaneous Forward Voltage (Note 1) @ 8 A / $T_A=25^{\circ}C$ @ 8 A / $T_A=125^{\circ}C$	V_F	2.9 2.0
Maximum DC Reverse Current at $T_A=25^{\circ}C$ Rated DC Blocking Voltage $T_A=125^{\circ}C$	I_R	30 200
Max Reverse Recovery Time(Note 2)	T_{rr}	25
Typical Thermal Resistance	$R_{\theta JC}$	5.5
Operating Temperature Range	T_J	-55 to + 150
Storage Temperature Range	T_{STG}	-55 to + 150

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Reverse Recovery Time Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

Version:

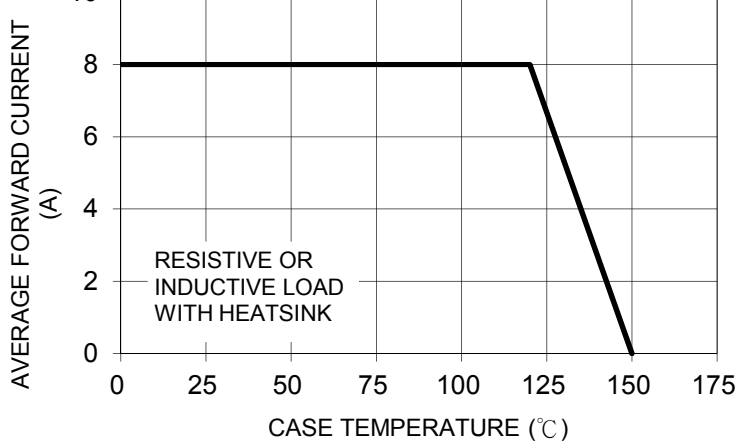


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

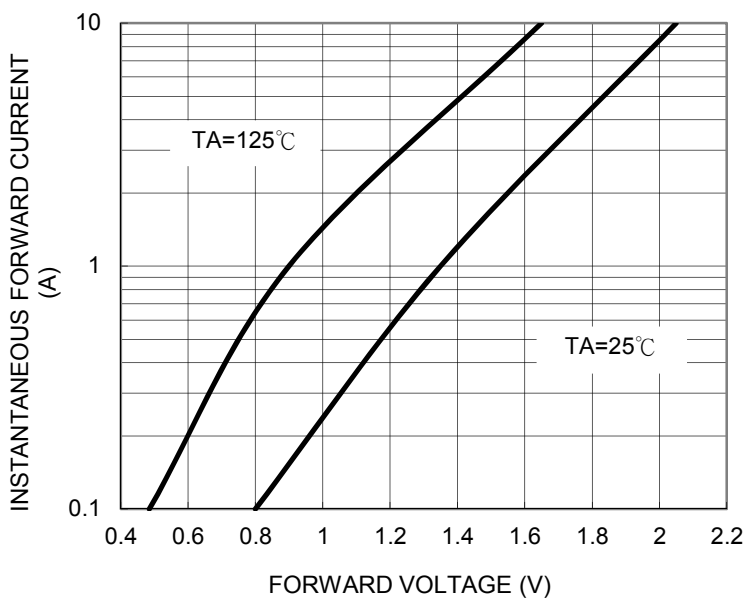
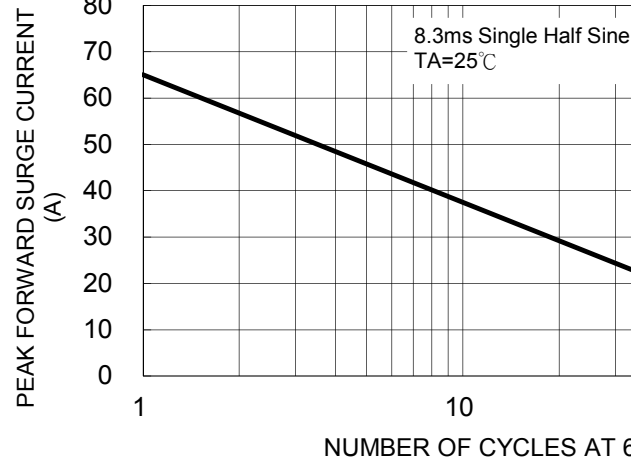


FIG. 5 TYPICAL JUNCTION CAPACITANCE



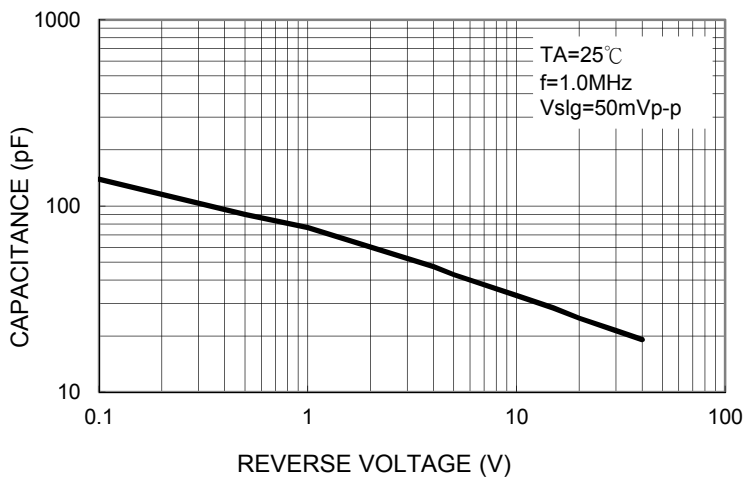


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

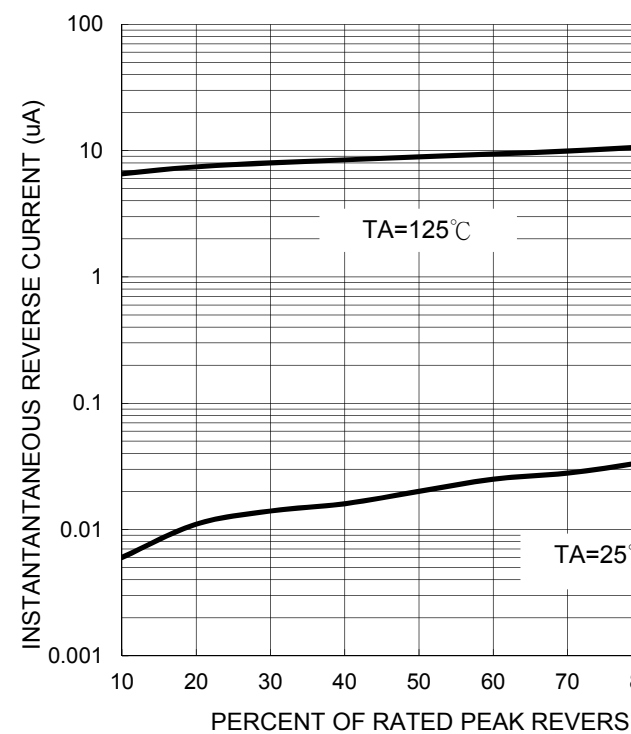

Dimensions

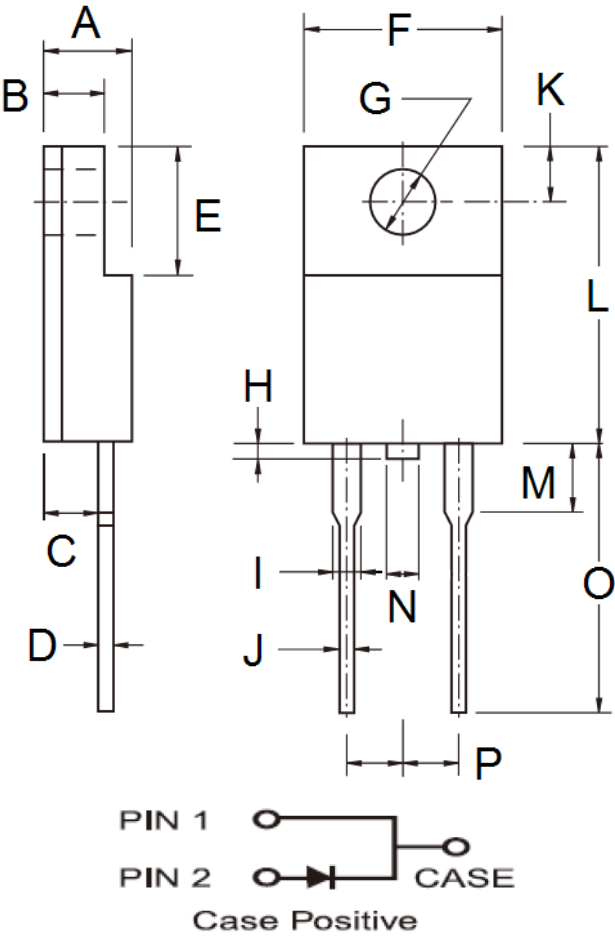

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.10	0.098	0.122
C	2.30	2.90	0.091	0.114
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	-	1.60	-	0.063
I	0.95	1.45	0.037	0.057
J	0.50	0.90	0.020	0.035
K	2.40	3.20	0.094	0.126
L	14.80	15.50	0.583	0.610
M	-	4.10	-	0.161
N	-	1.80	-	0.071
O	12.60	13.80	0.496	0.543
P	4.95	5.20	0.195	0.205

Marking Diagram



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code