



## A Tallysman Accutenna® TW3100 / TW3102 Permanent Mount GPS L1 Antenna

The TW3100 and TW3102 employs Tallysman's unique *Accutenna* technology in a permanent mount GPS L1 antenna, specially designed for professional precision tracking and timing applications.


The TW3100 features a custom high performance, dual-feed, wide band patch element. Its LNA configuration provides a LNA for each feed, a mid section high rejection SAW for the combined signal, followed by a final stage of LNA. It provides  $\pm 10$  MHz bandwidth centred on 1575.42 MHz and covers all GPS L1, Galileo E1 and SBAS (WAAS/EGNOS/MSAS) signals. It features great axial ratio over the entire frequency range ( $< 3$  dB), excellent circular polarized signal reception, great multipath rejection and out-of-band signal rejection.

The TW3102 has a prefilter to provide additional protection from high power near frequency or harmonic signals.

The TW3100 is housed in a permanent mount industrial grade weather-proof enclosure. Two options for mounting are available: an L-bracket (P/N#23-0040-0) or pipe mount (P/N#23-0065-0).



TW3100 Dimensions (mm)

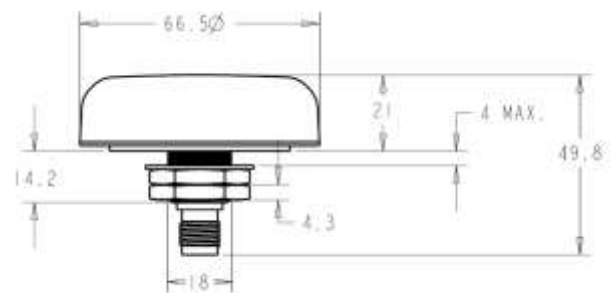

### Applications

- High Accuracy & Mission Critical GPS
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- High Value Asset Tracking & Fleet Management

### Features

- Great axial ratio: 1 dB typ.
- Low noise LNA: 1 dB (TW3100) 4 dB (TW3102)
- High rejection SAW filter
- High gain: 27 dB min. (TW3100) 25 min (TW3102)
- Low current: 14 mA typ.
- ESD circuit protection: 15 KV
- Wide voltage input range: +2.5 to 16 VDC
- Weather proof housing: IP67

### Benefits

- Excellent multipath rejection
- Increase system accuracy
- Excellent signal to noise ratio
- Great out of band signal rejection
- Ideal for harsh environments
- RoHS and REACH compliant



# TW3100 / TW3102 Permanent Mount GPS L1 Antenna

## Specifications V<sub>cc</sub> = 3V, over full bandwidth, T=25°C

### Antenna

Architecture	Dual, Quadrature Feeds
Antenna Element Gain (100mm ground plane)	4.25 dBic at 90°
Axial Ratio (over full bandwidth)	1dB typ., 3 dB max

### Electrical

Architecture	One LNA per feed line, mid section SAW filter	
Frequency Bandwidth	1575 MHz ± 10 MHz (TW3100) ± 5 MHz (TW3102)	
Polarization	RHCP	
Gain @1575.42MHz	27dB min. (TW3100) 25dB min (TW3102)	
Out-of-Band Rejection	<u>TW3100</u>	<u>TW3102</u>
<1545MHz		>65dB
<1560 MHz	>42 dB	>45dB
>1600 MHz	>31 dB	>50dB
>1620 MHz	>45 dB	>80dB
VSWR (at LNA input)	<1.5:1 typ. 1.8:1 max.	
Noise Figure	1 dB typ. (TW3100) 4dB typ (TW3102)	
Supply Voltage Range	2.5 to 16 VDC nominal (12VDC recommended maximum)	
Supply Current	14 mA typ., 20mA max	
ESD Circuit Protection	15 KV air discharge	

### Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21mm H
Operating Temp. Range	-40 to +85 °C
Enclosure	Radome: Dark Gray or White EXL9330 Base: Zamak White Metal
Weight	150 g
Attachment Method	19mm (1/4") permanent mount
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Salt fog / spray	MIL-STD-801F Section 509.4
Warranty	One year – parts and labour

### Ordering Information

TW3100 – GPS L1 antenna,	33-3100-xx-yy
TW3102 – Pre-filtered GPS L1 antenna	33-3102-xx-yy

Where xx = connector type, yy = type and colour of radome

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.

### Tallysman Wireless Inc

36 Steacie Drive  
Ottawa ON K2K 2A9 Canada  
Tel +1 613 591 3131

Fax 613 591 3121 [sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved. Rev 3.6