


REV. Status  
 PRELIMINARY  
 02/03/00 MP  
 PRELIMINARY 1  
 CHANGED ISO  
 AND E.  
 07/31/00 MP

ADSL transformer designed for use with Analog Device ADSL IC chip AD20MSP910



- A. Electrical Specifications (@ 25°C)
1. Primary (Line side) Impedance; 100Ω
  2. Secondary (IC side) Impedance; 100Ω
  3. Frequency Response; ±1.1dB @ 30KHz to 1.1MHz, 0dBm
  4. Insertion Loss; 0.5dB MAX @ 100KHz, 0dBm
  5. Longitudinal Balance; 40dBm MIN @ 1KHz TO 1MHz, 0dBm (Per ITU method pin 7 grounded)
  6. Primary Open Circuit Inductance; 5.0mH ±10% @ 10KHz, 1.0Vrms Measured (1-4) with 2 and 3 shorted
  7. Leakage Inductance; 16μH MAX @ 100KHz, 0.1Vrms Measured (1-4) with 2 & 3, 8 & 9 and 7 & 10 shorted
  8. Total Harmonic Distortion; -80dB MAX @ 30KHz
  9. DC Resistance; (1-4)=3.0Ω MAX, with 2 & 3 shorted (7-10)=3.0Ω MAX, with 8 & 9 shorted
  10. Turns Ratio; (1-4):(7-10)=1:1.00±2% 2 & 3, and 8 & 9 shorted
  11. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec

MODEL NUMBER  
**TTC-4015**

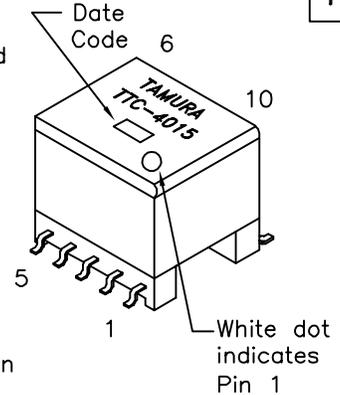


- B. Marking; TTC-4015, TAMURA, date code and country of origin  
 C. Safety; Complies with UL1950 3rd Edition and IEC950

D. Schematic;

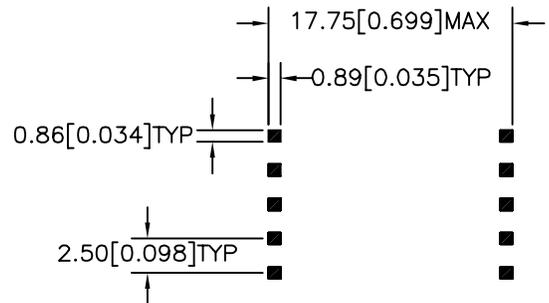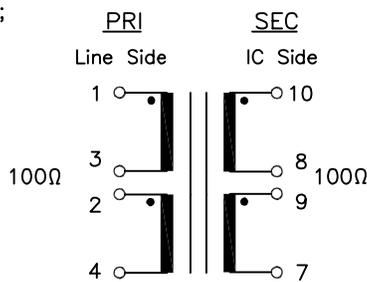

E. Mechanical Specifications;

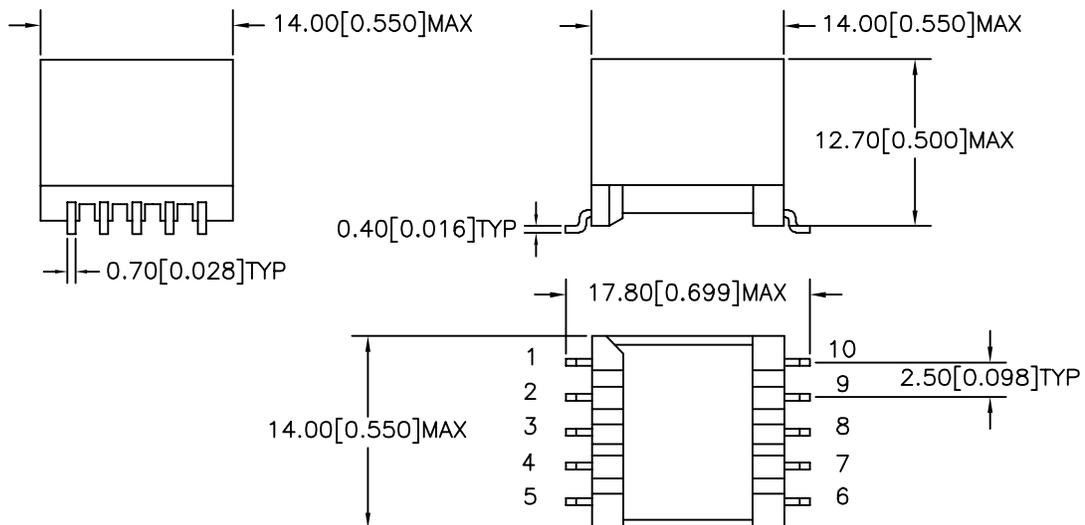

PREPARED BY:

D. Rund

ENGINEER:

M. Pitchai

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.  
 P-A1-12351  
 ACAD\TTC\A1123511.DWG

REV  
 PR1

ADSL  
 TRANSFORMER

**TAMURA CORPORATION OF AMERICA**  
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
 (909) 699-1270 FAX 9096769482

**TTC-4015**

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.