


8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.	
PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2150059-2	E	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2150059-2	E	PNEUMATIC AND CRIMP TOOLING KIT	PNEUMATIC
7-2150059-7	A	CRIMP TOOLING KIT	-

ATLANTIC VERSION TERMINATOR
INTERFACE ADAPTER

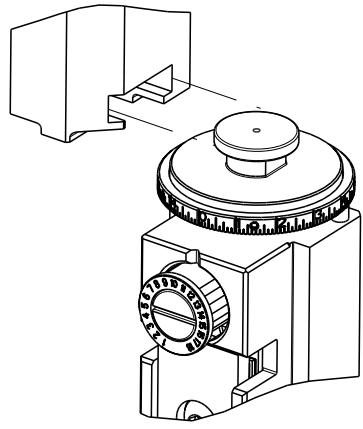

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.57 mm [.062]	F
INSUL	3.30 mm [.130]	F
APPL INSTRUCTIONS 408-35043		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: 187 SERIES POSITIVE LOCK RECEP			
WIRE STRIP LENGTH 4.00-5.00 mm [.157-.197 IN]		INSULATION DIAMETER RANGE Ø1.50-2.70 mm [.059-.106 IN]	
TERMINAL APPLICATION SPECIFICATION	114-5041	-	-
TERMINALS APPLIED 			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
170324-1	170324-2	170324-3	170324-5
1-170324-1	173690-1		

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
0.50mm2		1.09+/-0.05 [1.043+/- .002]		4.1
0.30mm2		1.06+/-0.05 [1.042+/- .002]		4.4
0.20mm2		1.00+/-0.05 [1.039+/- .002]		5.0



- RECOMMENDED SPARE PARTS
- REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 180.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.
6. UNLESS SPECIFIED OTHERWISE TORQUE VALUES SHALL BE USED PER DOCUMENT, 101-35000.

*WARNING
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING. REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)


2		1						
LOC	DIST	REVISIONS						
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		B		ECR-14-004521	26MAR2014	RK	GB	
		C		ECR-18-014739	17SEP2018	TB	TE	
		D		ECR-19-009342	13JUN2019	LG	TE	
		E		ECR-20-003027	02MAR2020	JWC	GB	

	-	1	1	2119641-1	FEED CAM, AIR FEED	248
	-	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
	-	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
3	-	1	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	1	2844940-3	AIR FEED MODULE	238
	-	1	1	1-18028-0	WASHER, FLAT, REG M8	192
3	-	1	1	1752354-8	STANDOFF,HOLD-DOWN	180
	-	1	1	6-993111-6	PIN, SLOTTED SPRING 3.0 X 14.0	177
	-	1	1	8-22280-7	SPRING, COMPRESSION	176
	-	1	1	1752353-2	GUIDE PIN,HOLDDOWN	175
	-	1	1	1901680-2	GUIDE PIN,HOLDDOWN	174
	-	REF	REF	994970-2	COUNTER, MAGNETIC	164
	-	1	1	455888-5	SPACER, CRIMPER	82
	-	1	1	1803607-4	DOCUMENTATION PACKAGE	71
	-	2	2	2-18032-2	SCR, SET, FLT PNT, M3 X 10.0	70
	-	1	1	2119740-1	TAG,IDENTIFICATION	67
	-	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
	-	1	1	1901681-9	HOLDDOWN, TERMINAL	65
	-	2	2	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	64
	-	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	60
	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	3	3	2168400-4	SHCS, LOW HEAD, RoHS, M4 X 8	57
	-	2	2	2168083-3	SCR, SKT HD CAP, RoHS, M4 X 12.0	56
	-	2	2	5018030-1	NUT, HEX, REG, RoHS, M3	54
	-	2	2	986965-8	NUT, LOCK, HEX, TORQUE (M4)	53
	-	1	1	1-5018030-0	NUT, HEX, REG, RoHS, M3.5	52
	-	1	1	2063961-5	FEED FINGER	51
	-	1	1	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	1	1	2119655-5	APPLICATOR BASIC ASSEMBLY, EF	46
	-	1	1	1803517-1	RAM ASSEMBLY, EF ATLANTIC	44
	-	1	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
	-	7	7	1-18028-2	WASHER, FLAT, REG M4	33
	-	2	2	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	31
	-	2	2	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	29
	-	1	1	240639-1	STRIPPER (MACHINING)	27
	-	2	2	1-2168083-5	SCR, SKT HD CAP, RoHS, M4 X 30	25
	-	1	1	1752371-7	PLATE, STRIP GUIDE	24
	-	1	1	240825-1	PLATE, STRIP HOLD DOWN	23
	-	2	2	2-22281-3	SPRING, COMPRESSION	22
	-	1	1	1803292-4	DRAG	20
	-	2	2	1901259-4	GUIDE, LOWER STRIP	18
	-	4	4	1-2079383-1	SCR, BHSC, RoHS (M6 X 12)	17
	-	1	1	1752360-1	SPACER,HOLD-DOWN	13
1	-	1	1	240833-1	PLATE, REAR SHEAR	11
	-	-	-	-	-	10
1	-	1	1	6-690482-3	PLATE, FRONT SHEAR	9
1	1	2	1	1333214-2	ANVIL, EF .062	8
1	-	1	1	1-2217206-0	BLADE, SLUG	7
	-	1	1	7-240641-5	SPACER	5
	-	1	1	238011-2	BLOCK, CRIMPER SPACER	4
1	1	2	1	2-1633961-6	CRIMPER, INSULATION F PREMIUM	3
	-	1	1	1-455888-0	SPACER, CRIMPER	2
1	1	2	1	2-456403-1	CRIMPER, WIRE PREMIUM	1
	-77	-72	-2	PART NO	DESCRIPTION	ITEM NO


THIS DRAWING IS UNPUBLISHED AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND TO BE OBSOLETE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR THE LATEST REVISION.		DWN C. CHEN S. XI APVD T. CRUZ	25MAY2012 25MAY2012 25MAY2012	TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC	NAME	Ocean End Feed Applicator	
MATERIAL -	FINISH -	APPLICATION SPEC	SIZE A1	CAGE CODE 00779	DRAWING NO ©=2150059
Customer Accessible Production Drawing		SCALE 1:1	SHEET 1	OF 4	REV E

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
A	66		-	SEE SHEET 1	-	-	-

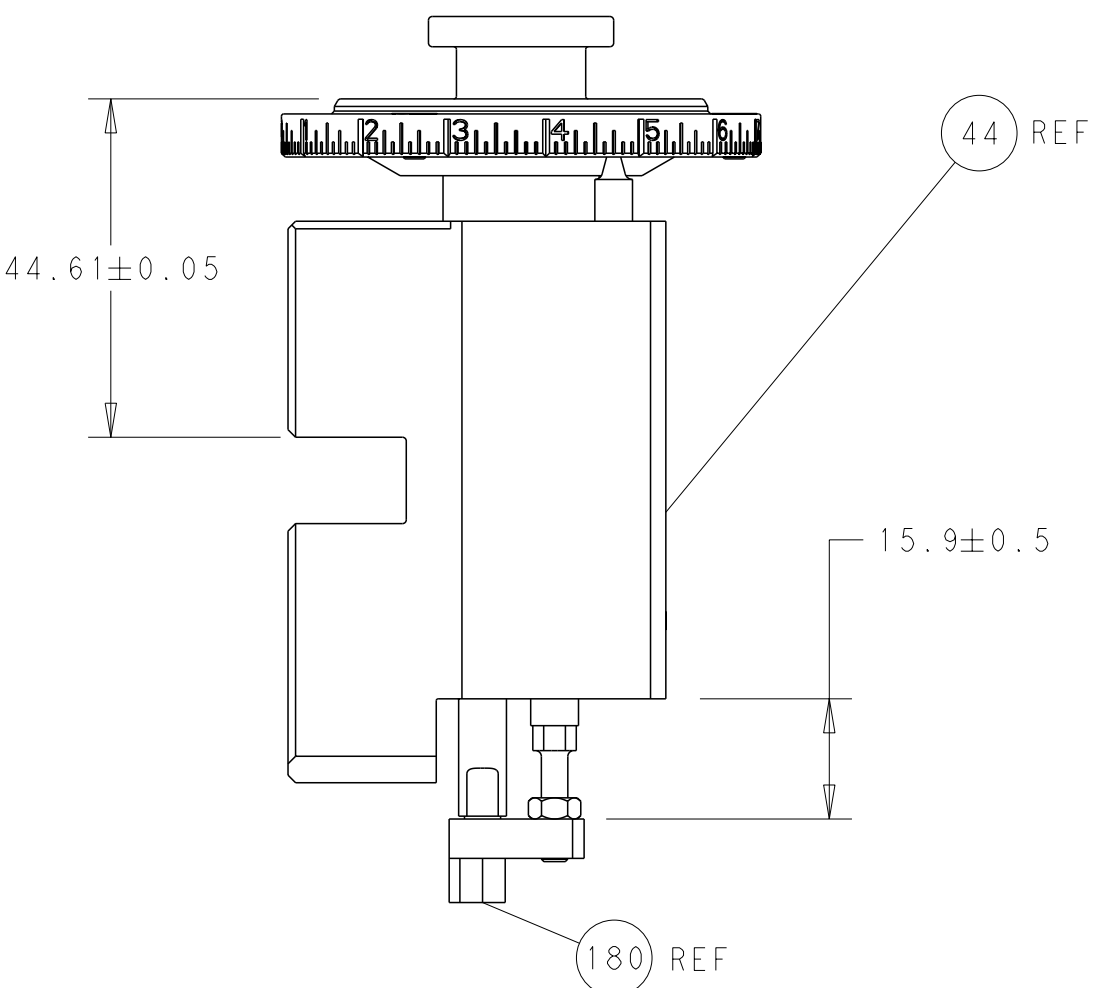


RAM AND HOLDDOWN SET-UP

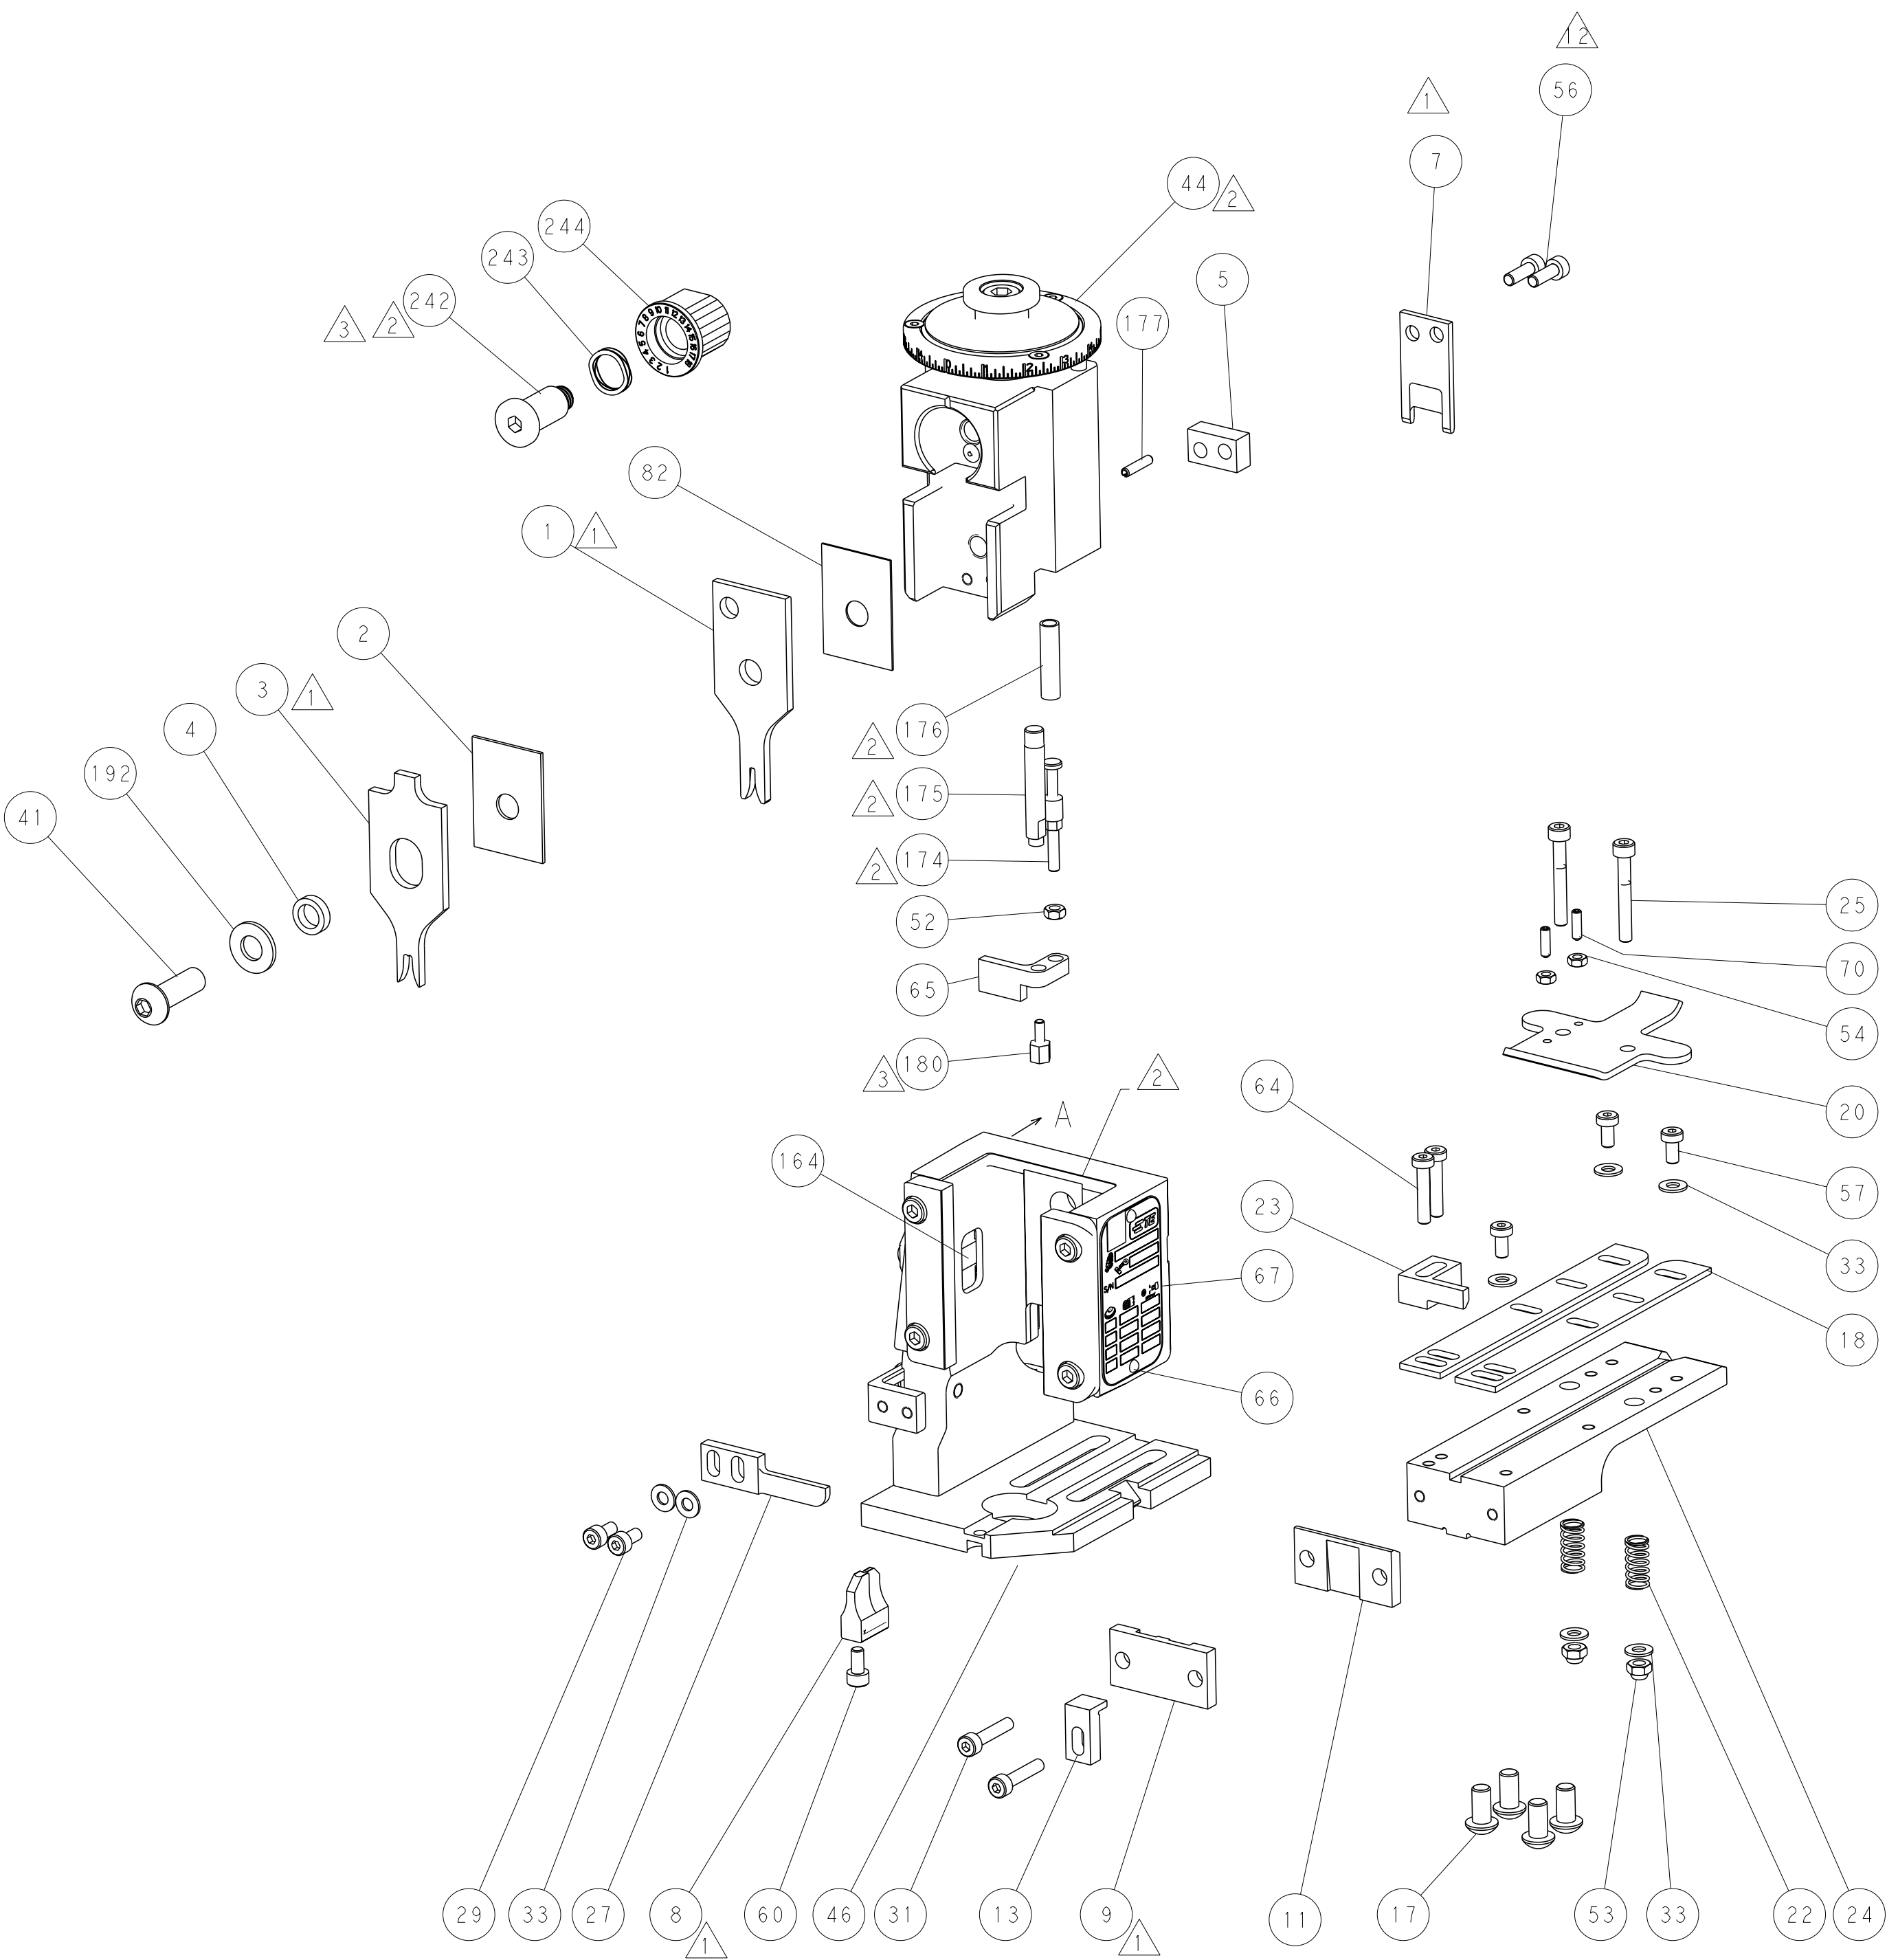

FEED TYPE

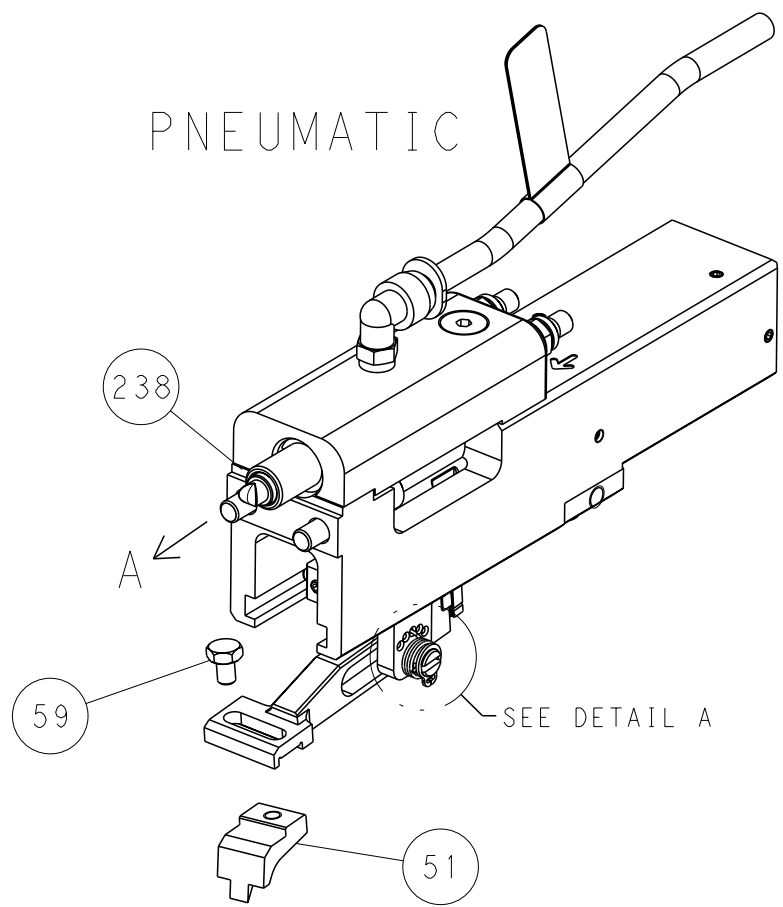


FEED SPRING SETTING POSITION

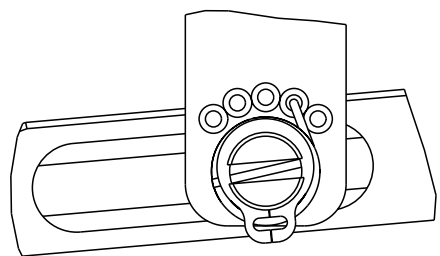


DETAIL A

CAM POSITION

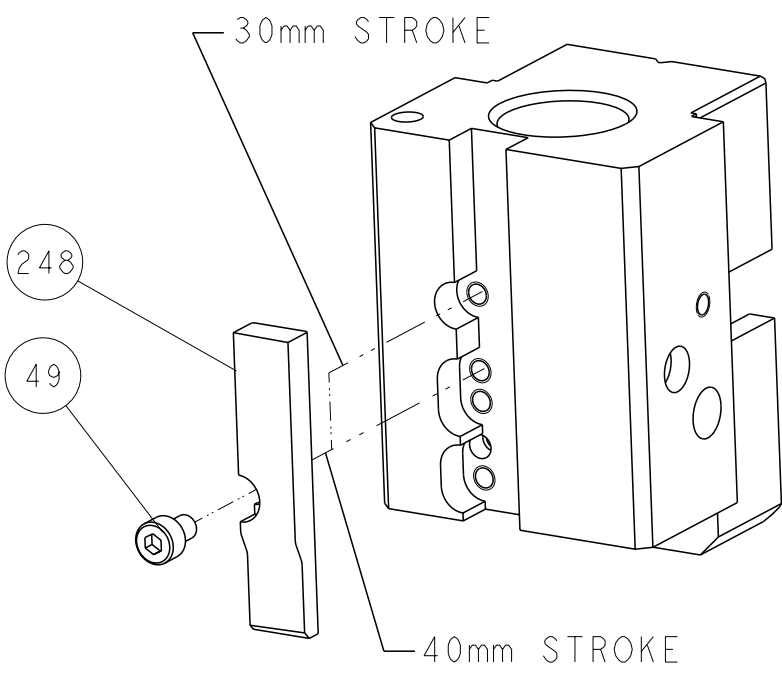


AIR FEED

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND TO CONTROL AND ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN C. CHEN 25MAY2012		 TE Connectivity Harrisburg, PA 17105-3608	
				CHK S. XI 25MAY2012			
				APVD J. CRUZ 25MAY2012			
				NAME			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -		Ocean End Feed Applicator -	
		1 PLC ±		APPLICATION SPEC -			
		2 PLC ±					
		3 PLC ±					
		4 PLC ±					
		ANGLES ±					
MATERIAL -		FINISH -		WEIGHT -		SIZE A1	
				Customer Accessible Production Drawing		CAGE CODE 00779	
						DRAWING NO C=2150059	
						RESTRICTED TO -	
						SCALE 1:1	
						SHEET 2	
						OF 4	
						REV E	

8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
20		20	
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.	
PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2-2150059-2	E	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2150059-7	A	CRIMP TOOLING KIT	-

PACIFIC VERSION TERMINATOR
INTERFACE ADAPTER

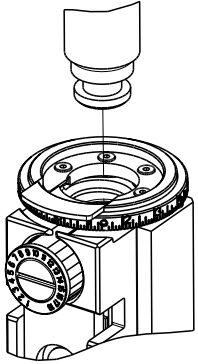

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.57 mm [.062]	F
INSUL	3.30 mm [.130]	F
APPL INSTRUCTIONS 408-35043		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: 187 SERIES POSITIVE LOCK RECEP			
WIRE STRIP LENGTH 4.00-5.00 mm [.157-.197 IN]		INSULATION DIAMETER RANGE Ø1.50-2.70 mm [.059-.106 IN]	
TERMINAL APPLICATION SPECIFICATION		114-5041	
TERMINALS APPLIED		5	
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
170324-1	170324-2	170324-3	170324-5
1-170324-1	173690-1		

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
0.50mm2		1.09+/-0.05 [.043+/-0.002]		4.1
0.30mm2		1.06+/-0.05 [.042+/-0.002]		4.4
0.20mm2		1.00+/-0.05 [.039+/-0.002]		5.0



- △ RECOMMENDED SPARE PARTS
- △ REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- △ APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 180.
- △ CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- △ TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.
6. UNLESS SPECIFIED OTHERWISE TORQUE VALUES SHALL BE USED PER DOCUMENT, 101-35000.

*WARNING
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING. REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.


PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

2		1						
LOC	DIST	REVISIONS						
A	66	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	


	-	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
	-	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
△	-	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	2844940-3	AIR FEED MODULE	238
	-	1	1-18028-0	WASHER, FLAT, REG M8	192
	-	4	2079383-9	SCR, BHSC, RoHS (M6 X 20)	186
△	-	1	1752354-8	STANDOFF,HOLD-DOWN	180
	-	1	6-993111-6	PIN, SLOTTED SPRING 3.0 X 14.0	177
	-	1	8-22280-7	SPRING, COMPRESSION	176
	-	1	1752353-2	GUIDE PIN,HOLDDOWN	175
	-	1	1901680-2	GUIDE PIN,HOLDDOWN	174
	-	REF	994970-2	COUNTER, MAGNETIC	164
	-	1	2119641-2	FEED CAM, AIR FEED	152
	-	1	2168083-8	SCR, SKT HD CAP, RoHS, M4 X 16	144
	-	1	2119655-6	APPLICATOR BASIC ASSEMBLY, EF	141
	-	1	1803518-1	RAM ASSEMBLY, EF PACIFIC	140
	-	1	455888-5	SPACER, CRIMPER	82
	-	1	1803607-4	DOCUMENTATION PACKAGE	71
	-	2	2-18032-2	SCR, SET, FLT PNT, M3 X 10.0	70
	-	1	2119740-1	TAG,IDENTIFICATION	67
	-	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
	-	1	1901681-9	HOLDDOWN, TERMINAL	65
	-	2	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	64
	-	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	3	2168400-4	SHCS, LOW HEAD, RoHS, M4 X 8	57
	-	2	2168083-3	SCR, SKT HD CAP, RoHS, M4 X 12.0	56
	-	2	5018030-1	NUT, HEX, REG, RoHS, M3	54
	-	2	986965-8	NUT, LOCK, HEX, TORQUE (M4)	53
	-	1	1-5018030-0	NUT, HEX, REG, RoHS, M3.5	52
	-	1	2063961-5	FEED FINGER	51
	-	1	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
	-	7	1-18028-2	WASHER, FLAT, REG M4	33
	-	2	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	31
	-	2	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	29
	-	1	240639-1	STRIPPER (MACHINING)	27
	-	2	1-2168083-5	SCR, SKT HD CAP, RoHS, M4 X 30	25
	-	1	1752371-7	PLATE, STRIP GUIDE	24
	-	1	240825-1	PLATE, STRIP HOLD DOWN	23
	-	2	2-22281-3	SPRING, COMPRESSION	22
	-	1	1803292-4	DRAG	20
	-	2	1901259-4	GUIDE, LOWER STRIP	18
	-	1	1752360-1	SPACER,HOLD-DOWN	13
△	-	1	240833-1	PLATE, REAR SHEAR	11
	-	-	-	-	10
△	-	1	6-690482-3	PLATE, FRONT SHEAR	9
△	1	1	1333214-2	ANVIL, EF .062	8
△	-	1	1-2217206-0	BLADE, SLUG	7
	-	1	7-240641-5	SPACER	5
	-	1	238011-2	BLOCK, CRIMPER SPACER	4
△	1	1	2-1633961-6	CRIMPER, INSULATION F PREMIUM	3
	-	1	1-455888-0	SPACER, CRIMPER	2
△	1	1	2-456403-1	CRIMPER, WIRE PREMIUM	1
	-77-22		PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR PROTECTIVE INFORMATION. IT IS SUBJECT TO CHANGE AND TO CONTROL AND ENGINEERING INFORMATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN C. CHEN 25MAY2012	TE Connectivity Harrisburg, PA 17105-3608							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK S. XI 25MAY2012	NAME							
mm		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		APVD J. CRUZ 25MAY2012	Ocean End Feed Applicator							
		ANGLES		APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		A1		00779	©=2150059	-		
				Customer Accessible Production Drawing				SCALE		1:1	SHEET 3 of 4	REV E


SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

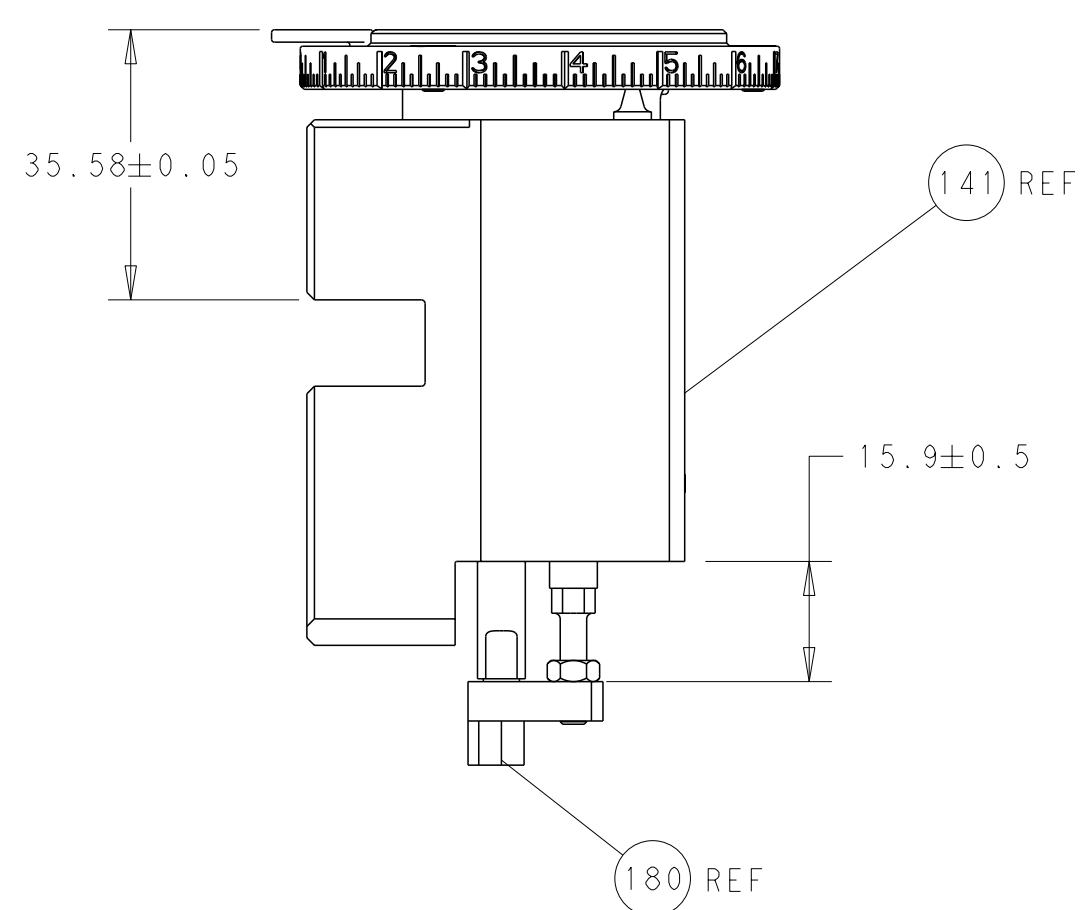


RAM AND HOLDDOWN SET-UP

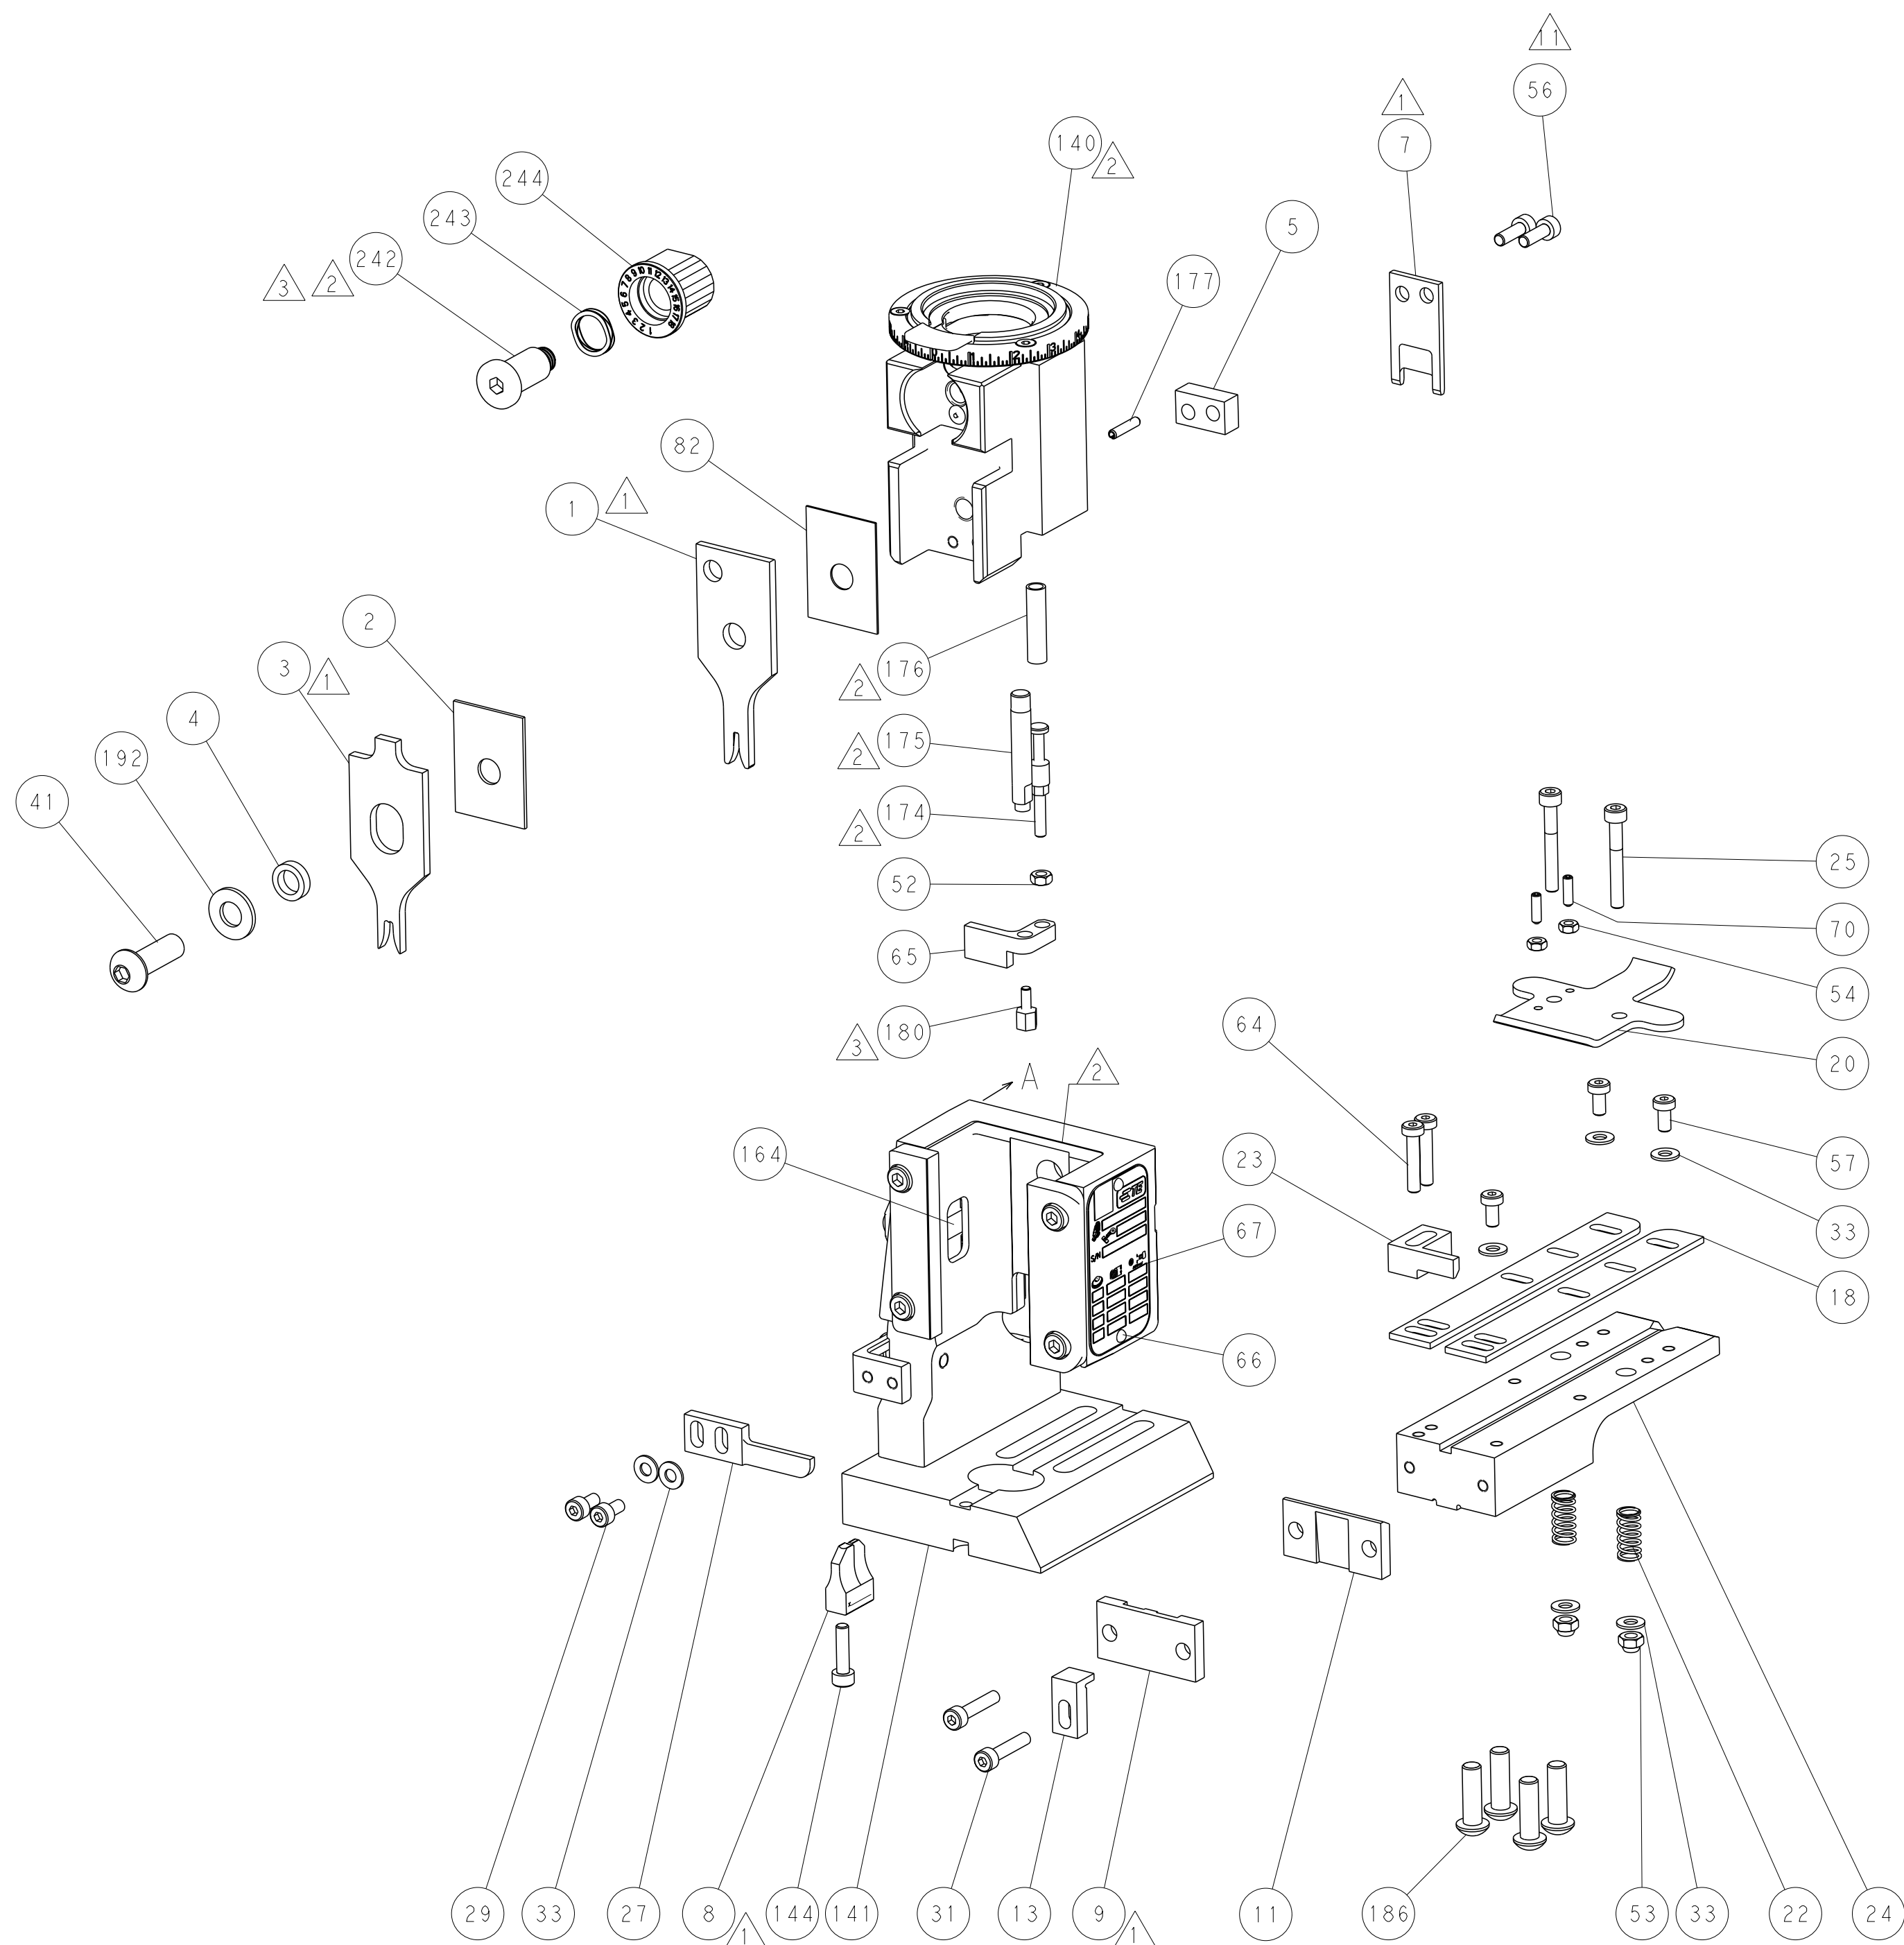


FEED TYPE

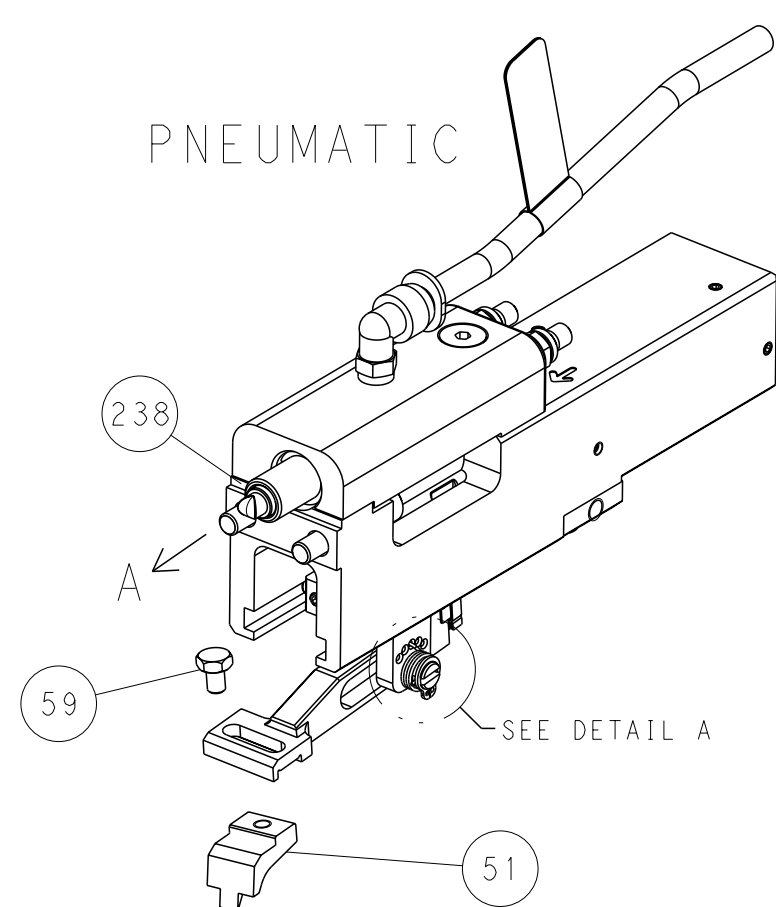

FEED SPRING
SETTING POSITION

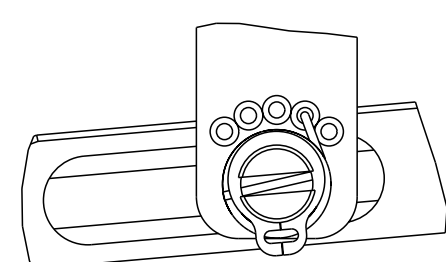

DETAIL A

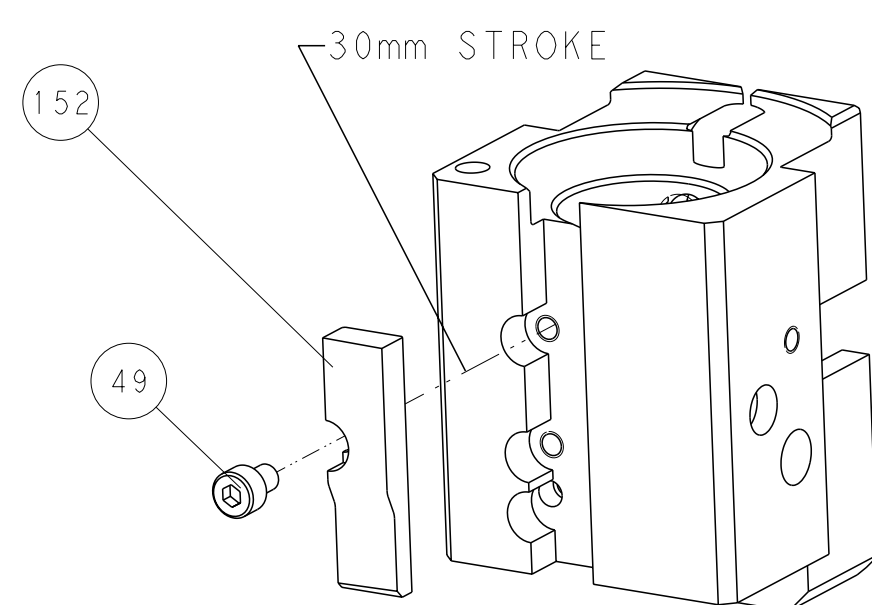


CAM POSITION

AIR FEED

PACIFIC VERSION

Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS A COMPUTER GENERATED DRAWING FOR TWO ELECTRONIC CONNECTION POINTS. THE DIMENSIONS AND TOLERANCES ARE BASED ON THE ASSUMPTION THAT THE PARTS WILL BE MANUFACTURED TO THE LATEST REVISION.		DWN: 25MAY2012 C: CHEN CHK: 25MAY2012 3: XI APVD: 25MAY2012 T: CRUZ		TE Connectivity Harrisburg, PA 17105-3608 	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME: Ocean End Feed Applicator	
		PRODUCT SPEC: - APPLICATION SPEC: -		SIZE: A CAGE CODE: 00779 DRAWING NO: C=2150059 RESTRICTED TO: -	
MATERIAL: - FINISH: -		WEIGHT: -		SCALE: 1:1 SHEET: 4 of 4 REV: E	
Customer Accessible Production Drawing					