


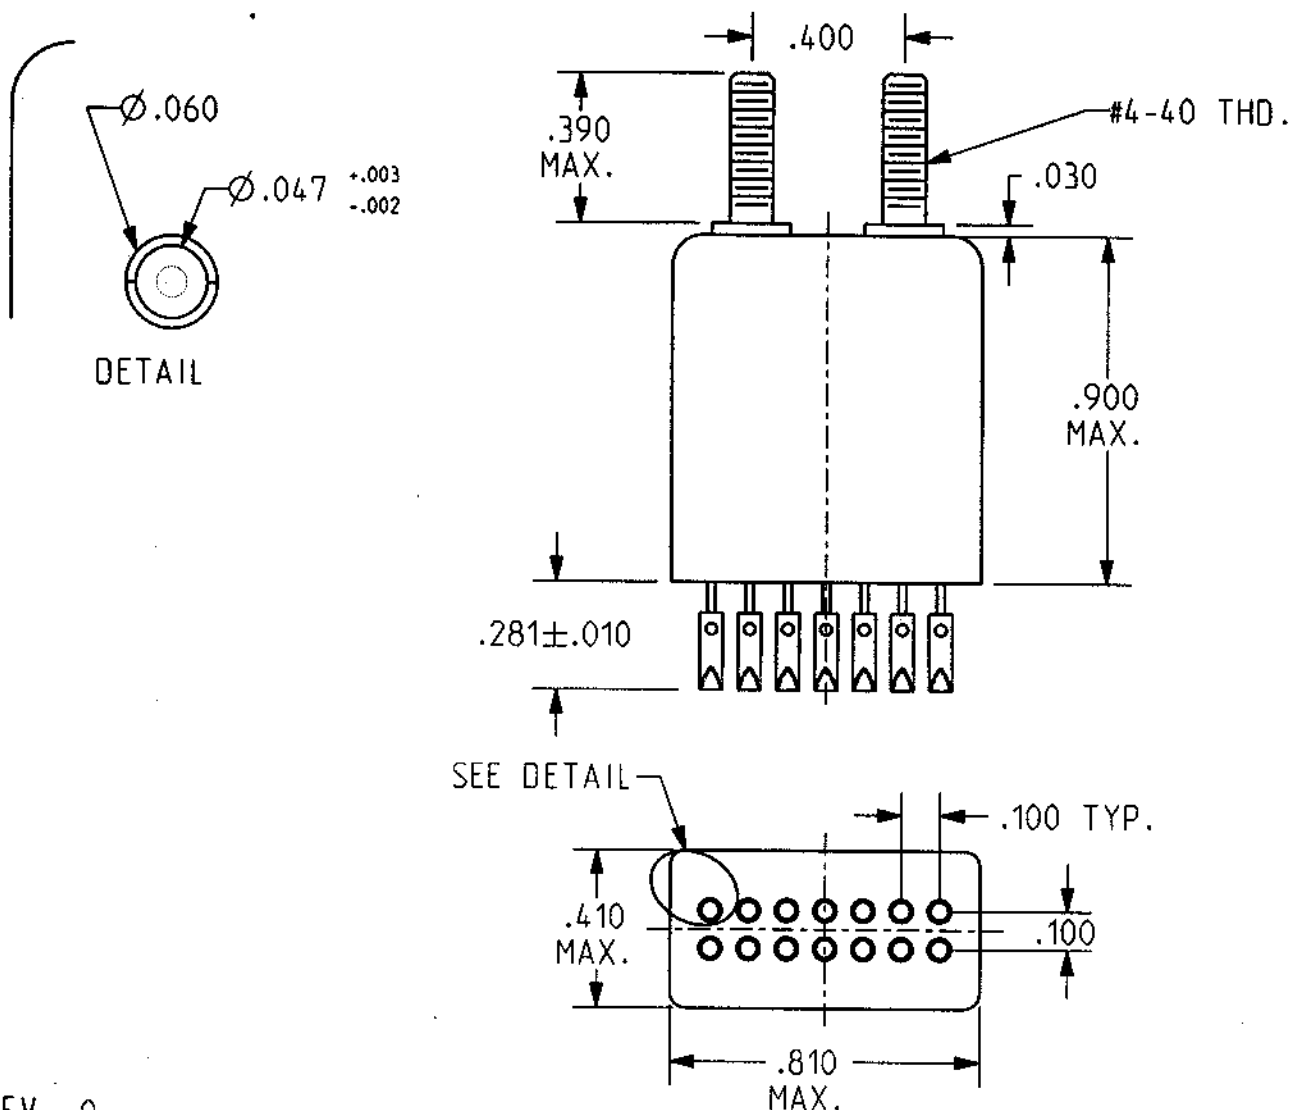

REV. 0


DCO 143805

COIL: @ 25°C
 RESISTANCE 390 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 14.0 VDC
 MUST RELEASE 1.4 VDC

ENVIRONMENT:
 VIBRATION 10 Hz TO 2000 Hz @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATED & RELEASE 5 MS MAX.
 BOUNCE 5 MS MAX.
 5000 OPERATIONS RUN-IN TEST REQUIRED

CUSTOMER DATA SHEET

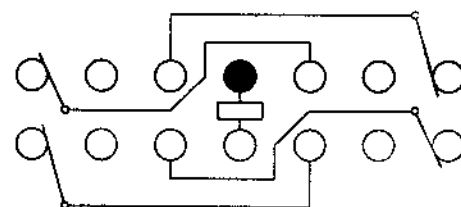

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMP 28 VDC RESISTIVE

DR. B.D. 160CT03

CK. 12/16/55

CII Technologies
 advanced control electronic solutions

CUST. CII STD.
 CUST. NO. REV.

"AR" RELAY

ARG-D4C-24F