


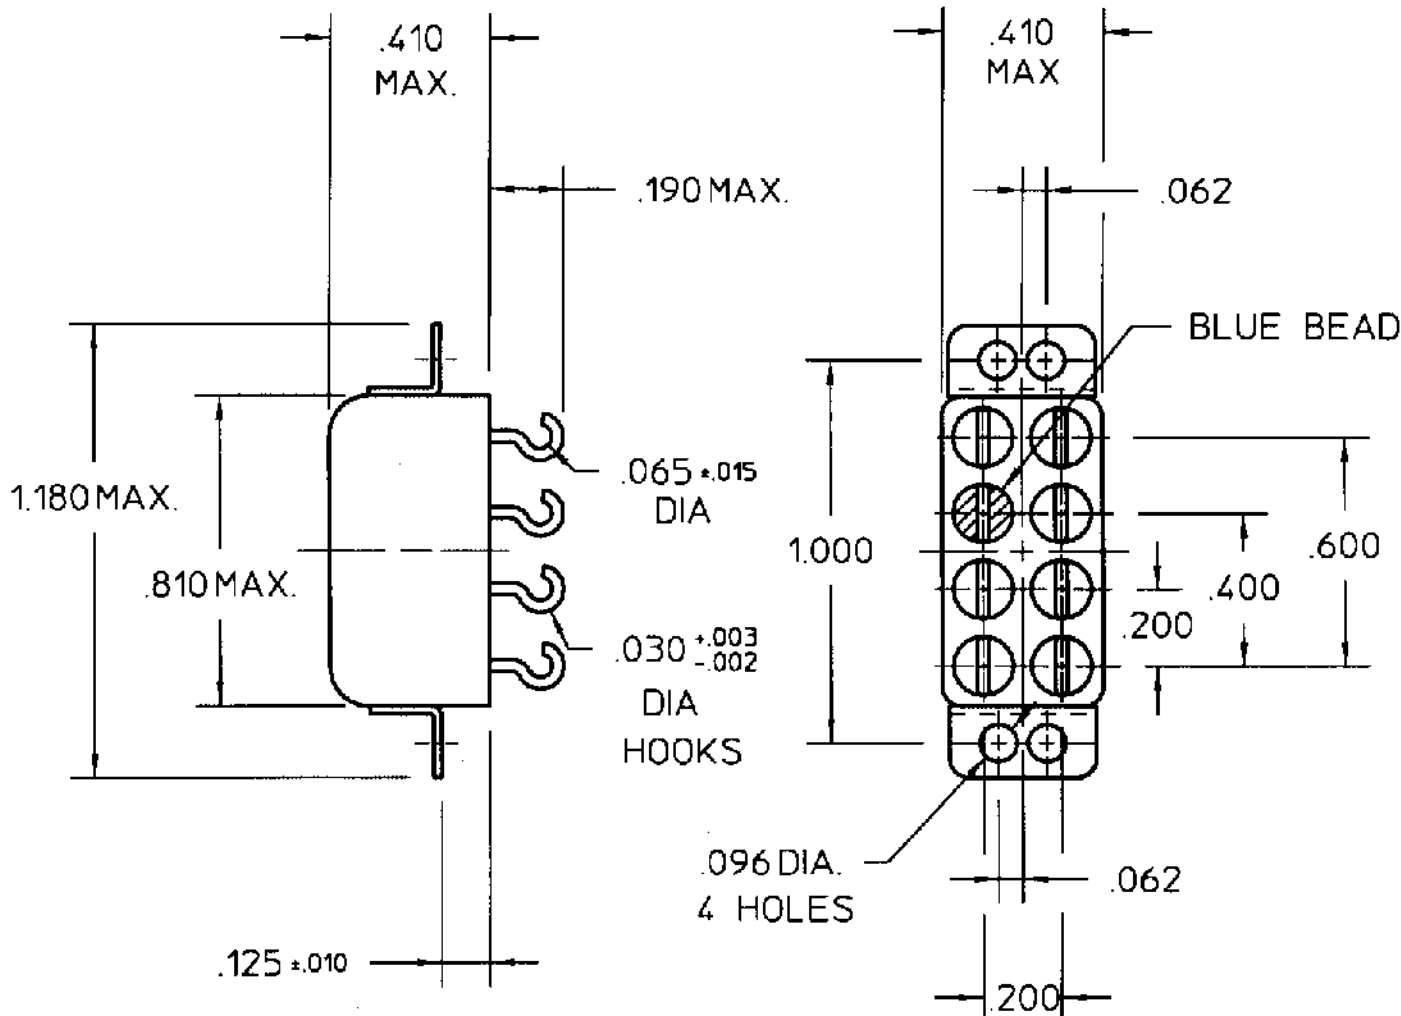


COIL: @ 25° C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

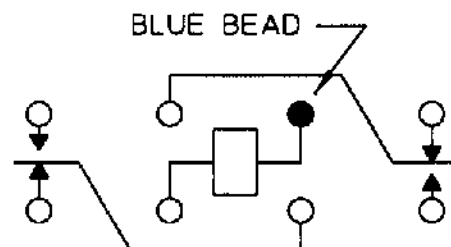

CONTACT RATING: LOW LEVEL TO
 5 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. R.B. 6/4/98 CK. *[Signature]*

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO.

TYPE HFW5A RELAY

HFW5A1106K00