




+ RELAYS, CONTACTORS & SWITCHES

HALF-SIZE RELAYS

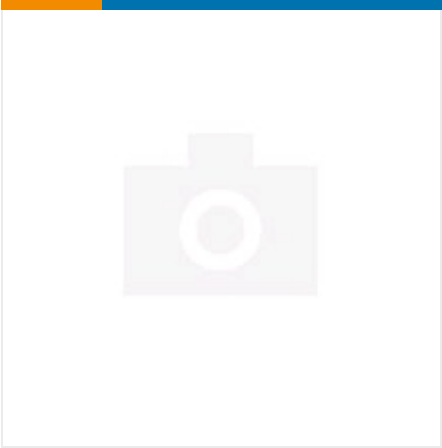

✓ Active

TE CONNECTIVITY (TE)
HFW1201K46P = M39016/6-209P
CII

HFW1201K46P
TE Internal Number: 2-1617031-5
Mil-Spec: M39016/6-209P

Not EU RoHS Compliant
Not EU ELV Compliant

Contact Arrangement 2 Form C, DPDT, 2 C/O
Input Voltage (VDC) 26.5
Contact Current Rating (A) 2
Coil Voltage Rating (VDC) 26.5
Coil Resistance (Ω) 700

↓ PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

TYPE HFW RELAY
PDF
English

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.
Please Note: Use the Product Drawing for all design activity.

Product Type Features

Coil Latching Without
Product Type Relay
MOSFET Driver Without
Relay Type Military/Aerospace High Performance
Enclosure Type Hermetically Sealed

Configuration Features

Transistor Driver Without

Electrical Characteristics

Input Voltage (VDC) 26.5
Coil Voltage Rating (VDC) 26.5
Coil Resistance (Ω) 700
Coil Power Rating (DC) (mW) 1003
Vibration 30G's, 10 – 3000Hz
Coil Polarity Protection Diode Without
Coil Power Measurement Milliwatts
Actuating System DC
Coil Suppression Diode Without
Shock 100G's, 6ms
Coil Magnetic System Non-Polarized, Monostable

Contact Features

Contact Arrangement 2 Form C, DPDT, 2 C/O
Contact Current Rating (A) 2

Termination Features

Termination Type PC Pins

Mechanical Attachment

Mounting Type Printed Circuit Board

Usage Conditions

Operating Temperature Range (°C) -65 – 125

Statement of Compliance

Statement of Compliance
PDF