


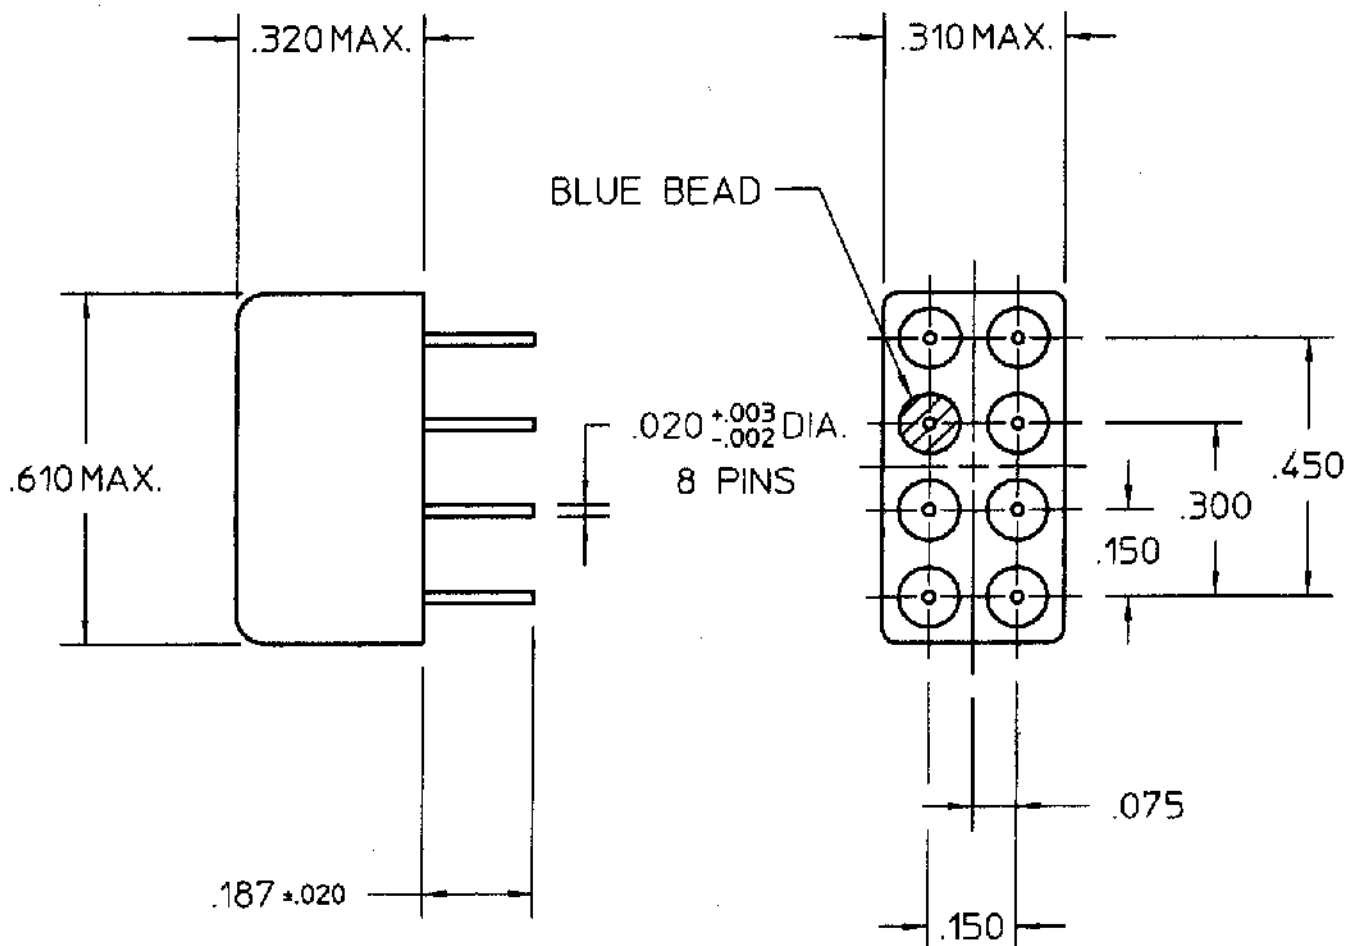

REV. 0

DCO 142026


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 1350 OHMS ± 10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 26.5 VDC  
 MUST OPERATE \_\_\_\_\_ 13.5 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 3000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 75 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
 CONTACT STABILIZATION TIME 2.5 MS MAX.

CUSTOMER DATA SHEET

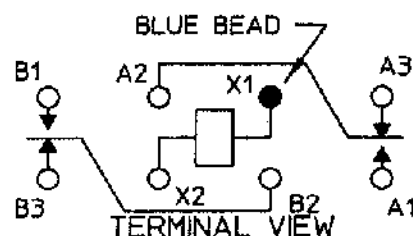

CONTACT RATING: LOW LEVEL TO  
 2 AMPS 28 VDC RESISTIVE  
 50,000 OPERATIONS

DR. PBB 5/22/00 CK.TLG 9-13-00

COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. \_\_\_\_\_ QPL  
 CUST. NO. M39016/13-057M REV. \_\_\_\_\_  
 '3SBC' RELAY

3SBC1518A2