This browser does not have Java enabled.

TE connectivity

My Cart | My Part Lists | Sign In/Register   English (Change)

Have a Question?
Chat with a Product
Information Specialist

What can we help you find?

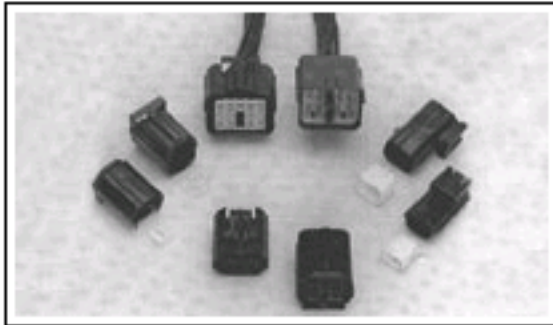| Products | Industries | Resources | About TE | My Account | Innovation | Support Center |

345255-1 Product Details

Share   Print   Email

345255-1

TE Internal Number: 345255-1
✔ Active

📄 View 3D PDF

Econoseal III

🌿 Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:
- 070 Series
- Wire-to-Board / Wire-to-Panel / Wire-to-Wire
- Accessory
- Accessory Type = Double Lock Plate
- For Use With Cap (Tab) Housing

View all Features

Quick Links
▷ Pricing & Availability
▷ Search for Tooling
▷ Product Feature Selector
▷ Contact Us About This Product

Add to My Part List   Request Sample   Find Similar Products   Buy Product

Documentation & Additional Information

Product Drawings:
- a/backout for 3 way tab hsg econoseal 3 low current (PDF, English)

Catalog Pages/Data Sheets:
- None Available

Product Specifications:
- None Available

Application Specifications:
- None Available

Instruction Sheets:
- None Available

CAD Files: (CAD Format & Compression Information)
- 2D Drawing (DXF, Version O)
- 3D Model (IGES, Version O)
- 3D Model (STEP, Version O)

Additional Information:
- Product Line Information

Related Products:
- Tooling

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Series = 070
- Product Type = Accessory
- Accessory Type = Double Lock Plate
- Accessory Color = Yellow

Dimensions:
- Length (X-Axis) (mm [in]) = 12.70 [0.4999]
- Width (Z-Axis) (mm [in]) = 17.80 [0.7007]
- Profile Height (Y-Axis) (mm [in]) = 9.00 [0.354]

Housing Features:
- Centerline (mm [in]) = 4.80 [0.1889]
- Housing Material = Nylon

Configuration Features:
- Number of Positions = 3
- Number of Rows = 1
- GET 0.64 Connector System = No

Industry Standards:
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:
- For Use With = Cap (Tab) Housing

Operation/Application:
- Application Use = Wire-to-Board / Wire-to-Panel / Wire-to-Wire

Packaging Features:
- Packaging Method = Bag, Box
- Packaging Quantity = 3,000

Other:
- Brand = AMP
- Comment = One lock plate is required for each connector housing.

Provide Website Feedback